



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint\_rate2006 = 1140**

IBM Power 750 Express (3.55 GHz, 32 core, RedHat)

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2010

Hardware Availability: Feb-2010

Software Availability: Nov-2010

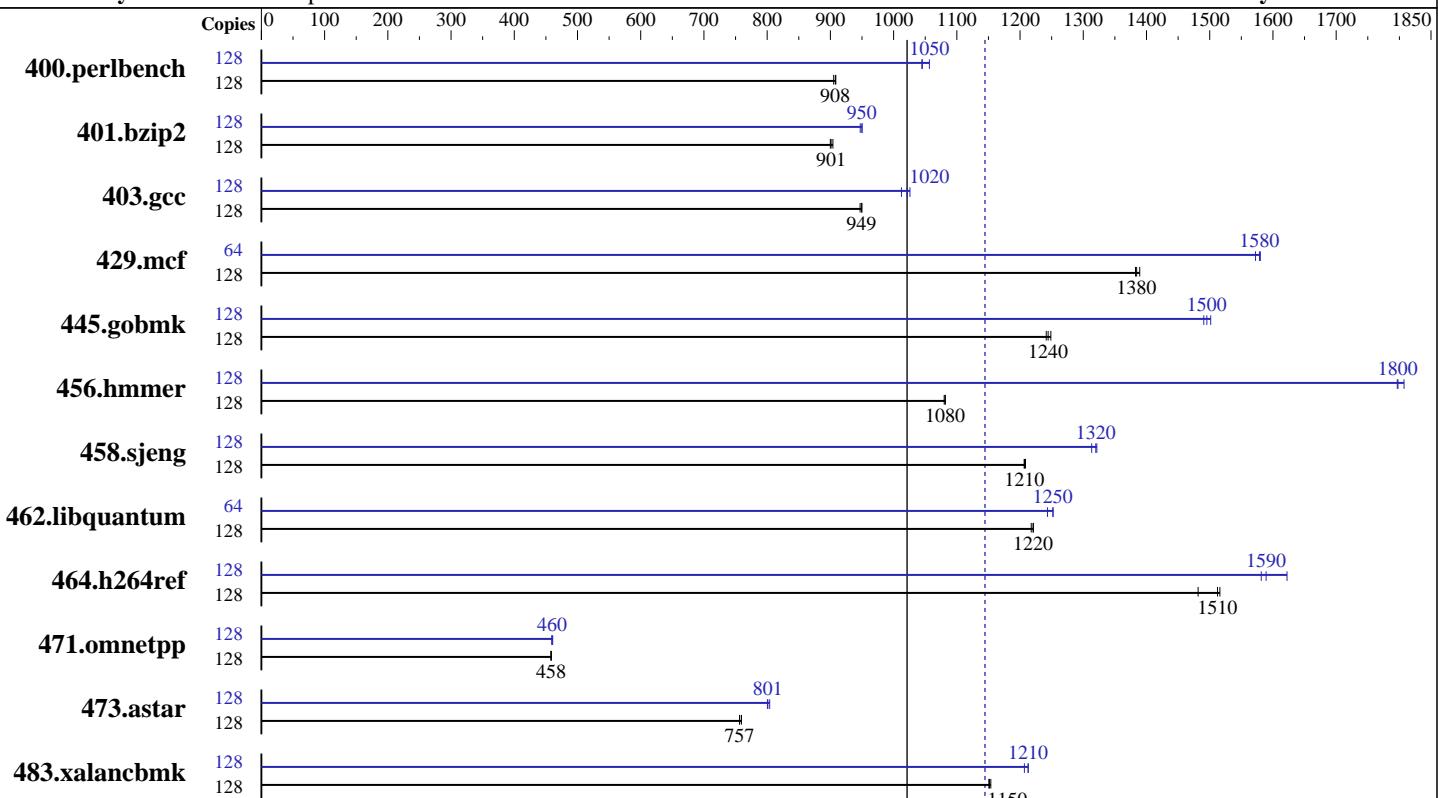

**SPECint\_rate\_base2006 = 1020**

**SPECint\_rate2006 = 1140**

### Hardware

CPU Name: POWER7  
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.86 GHz  
 CPU MHz: 3556  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 4 threads/core  
 CPU(s) orderable: 8,16,24,32 cores  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per core  
 Other Cache: None  
 Memory: 256 GB (32x8 GB) DDR3 1066 MHz  
 Disk Subsystem: 6x146.8 GB Software RAID-0 SAS SFF 15K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.0 (ppc64), Kernel 2.6.32-71.el6.ppc64  
 Compiler: IBM XL C/C++ for Linux, V11.1 Updated with the Nov2010 PTF  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-3  
 -MicroQuill SmartHeap 9



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 1140**

IBM Power 750 Express (3.55 GHz, 32 core, RedHat)

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 11

Test date: Oct-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Nov-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1382	905	1376	909	<b><u>1378</u></b>	<b><u>908</u></b>	128	1197	1040	1184	1060	<b><u>1196</u></b>	<b><u>1050</u></b>
401.bzip2	128	1373	900	1366	904	<b><u>1371</u></b>	<b><u>901</u></b>	128	<b><u>1300</u></b>	<b><u>950</u></b>	1304	947	1300	950
403.gcc	128	<b><u>1085</u></b>	<b><u>949</u></b>	1085	950	1088	947	128	1018	1010	<b><u>1009</u></b>	<b><u>1020</u></b>	1004	1030
429.mcf	128	844	1380	840	1390	<b><u>843</u></b>	<b><u>1380</u></b>	64	371	1570	<b><u>370</u></b>	<b><u>1580</u></b>	369	1580
445.gobmk	128	1075	1250	1082	1240	<b><u>1079</u></b>	<b><u>1240</u></b>	128	894	1500	<b><u>898</u></b>	<b><u>1500</u></b>	901	1490
456.hammer	128	1104	1080	<b><u>1104</u></b>	<b><u>1080</u></b>	1106	1080	128	661	1810	<b><u>664</u></b>	<b><u>1800</u></b>	665	1800
458.sjeng	128	<b><u>1283</u></b>	<b><u>1210</u></b>	1284	1210	1281	1210	128	1172	1320	<b><u>1174</u></b>	<b><u>1320</u></b>	1179	1310
462.libquantum	128	<b><u>2173</u></b>	<b><u>1220</u></b>	2178	1220	2172	1220	64	<b><u>1059</u></b>	<b><u>1250</u></b>	1066	1240	1059	1250
464.h264ref	128	1868	1520	<b><u>1873</u></b>	<b><u>1510</u></b>	1912	1480	128	1746	1620	<b><u>1782</u></b>	<b><u>1590</u></b>	1791	1580
471.omnetpp	128	1747	458	1745	458	<b><u>1745</u></b>	<b><u>458</u></b>	128	1742	459	<b><u>1739</u></b>	<b><u>460</u></b>	1736	461
473.astar	128	1183	759	1188	756	<b><u>1188</u></b>	<b><u>757</u></b>	128	1118	804	1123	800	<b><u>1122</u></b>	<b><u>801</u></b>
483.xalancbmk	128	768	1150	<b><u>767</u></b>	<b><u>1150</u></b>	766	1150	128	732	1210	728	1210	<b><u>728</u></b>	<b><u>1210</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Tuning Notes

```
IBM Post-Link Optimization tool with
options "-O4 -omullX" used for
  400.perlbench
options "-O4 -vrox" used for
  401.bzip2
options "-O4 -nodp -rtb"
  403.gcc
options "-O3" used for
  429.mcf 445.gobmk 458.sjeng 473.astar
options "-O4 -nodp -m power7" used for
  456.hammer
options "-O4 -vrox -nodp" used for
  462.libquantum
options "-O4 -vrox -nodp -rtb" used for
  464.h264ref
options "-O3 -lu -l -nodp -sdp 9" used for
  471.omnetpp
options "-O3 -m power7" used for
  483.xalancbmk
Whenever option "-omullX" was used during the optimization phase,
option "-imullX" was also used during the instrumentation phase.
```

## Submit Notes

The config file option 'submit' was used.

Benchmarks bound to a processor using numactl on the submit command.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 750 Express (3.55 GHz, 32 core, RedHat)

**SPECint\_rate2006 = 1140**

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2010

Hardware Availability: Feb-2010

Software Availability: Nov-2010

## Operating System Notes

ulimit -s (stack) set to 1048576.

Large pages reserved as follows by root user:

```
echo 9000 > /proc/sys/vm/nr_hugepages
```

The following environment variables were set before the runspec command:

```
XLFRTEOPTS=intinthds=1
```

```
HUGETLB_VERBOSE=0
```

```
HUGETLB_MORECORE=yes
```

```
HUGETLB_ELFMAP=RW
```

## Base Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

C++ benchmarks:

```
x1C
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_PPC

462.libquantum: -DSPEC\_CPU\_LINUX

```
464.h264ref: -qchars=signed
```

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-O5 -qarch=pwr7 -qtune=pwr7 -qalias=noansi -qalloc -lhugetlbfs
```

C++ benchmarks:

```
-O5 -qarch=pwr7 -qtune=pwr7 -qrtti -lsmartheap
```

## Base Other Flags

C benchmarks:

```
-qipa=threads
```

C++ benchmarks:

```
-qipa=threads
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 750 Express (3.55 GHz, 32 core, RedHat)

**SPECint\_rate2006 = 1140**

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2010

Hardware Availability: Feb-2010

Software Availability: Nov-2010

## Peak Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

C++ benchmarks:

```
x1C
```

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_PPC

462.libquantum: -DSPEC\_CPU\_LINUX

464.h264ref: -qchars=signed

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qalias=noansi -qipa=level=2 -lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs

403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qalloc -lhugetlbfs

429.mcf: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs

445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs

456.hmmer: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -qsimd  
-qassert=refalign -qipa=inline=threshold=2888  
-qipa=inline=limit=11880 -lhugetlbfs

458.sjeng: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -q64 -lhugetlbfs

464.h264ref: Same as 458.sjeng

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 1140

IBM Power 750 Express (3.55 GHz, 32 core, RedHat)

SPECint\_rate\_base2006 = 1020

CPU2006 license: 11

Test date: Oct-2010

Test sponsor: IBM Corporation

Hardware Availability: Feb-2010

Tested by: IBM Corporation

Software Availability: Nov-2010

## Peak Optimization Flags (Continued)

471.omnetpp: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs -lsmartheap

483.xalancbmk: -Wl,-q -O4 -qarch=pwr7 -qtune=pwr7 -qipa=partition=large  
-lsmartheap

## Peak Other Flags

C benchmarks (except as noted below):

-qipa=threads

C++ benchmarks:

-qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20101123.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20101123.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:27:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 November 2010.