SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Fire X4470 (Intel Xeon E7530 1.87 GHz)

SPECfp®_rate2006 = 387

SPECfp_rate_base2006 = 376

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Jun-2010
Software Availability: Jun-2010

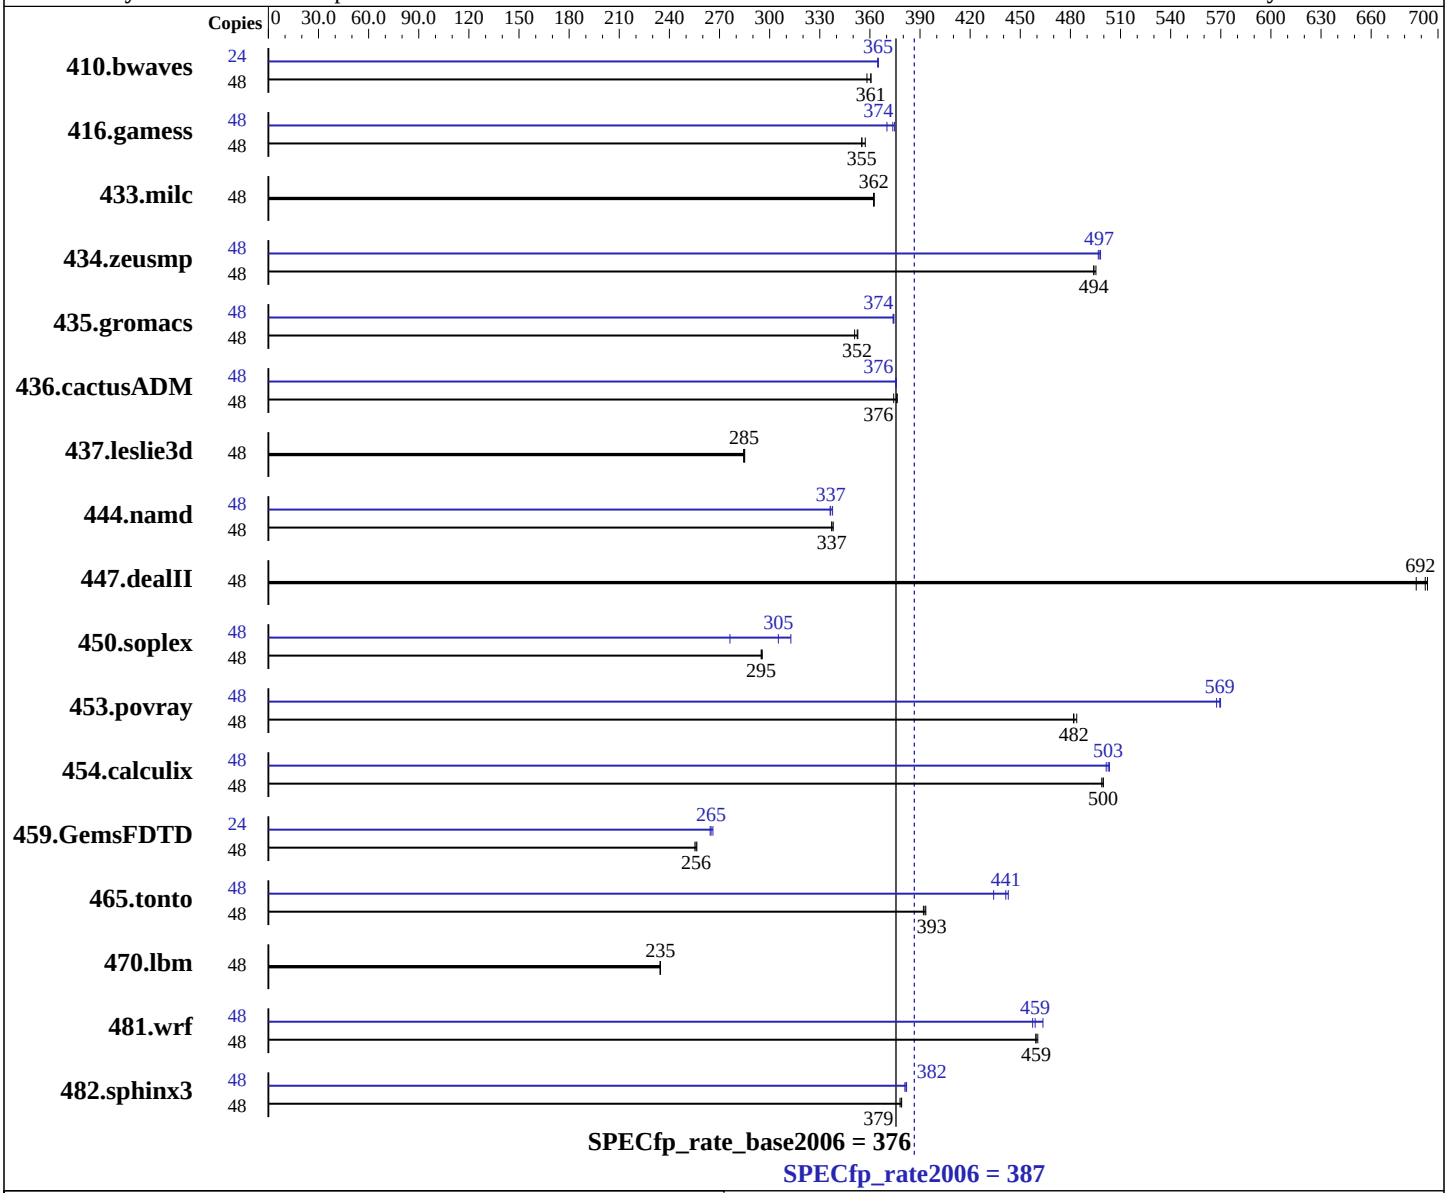

Hardware

CPU Name:	Intel Xeon E7530
CPU Characteristics:	Intel Turbo Boost Technology up to 2.13 GHz
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1-4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Oracle Solaris 10 9/10
Compiler:	Oracle Solaris Studio Express 6/10
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	Apache C++ Standard Library V4.2.1

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Fire X4470 (Intel Xeon E7530 1.87 GHz)

SPECfp_rate2006 = 387

SPECfp_rate_base2006 = 376

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Jun-2010
Software Availability: Jun-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (64 x 4 GB 2Rx4 PC3-10600R-9, ECC, see add'l detail in notes)
Disk Subsystem: 1 x 500 GB, SATA, 7200 RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1821	358	**1809**	**361**	1809	361	24	**894**	**365**	894	365	893	365
416.gamess	48	2631	357	2646	355	**2646**	**355**	48	**2515**	**374**	2539	370	2508	375
433.milc	48	1216	362	1215	363	**1216**	**362**	48	1216	362	1215	363	**1216**	**362**
434.zeusmp	48	**884**	**494**	882	495	884	494	48	879	497	877	498	**879**	**497**
435.gromacs	48	971	353	977	351	**972**	**352**	48	916	374	917	374	**916**	**374**
436.cactusADM	48	1533	374	**1525**	**376**	1524	376	48	1527	376	1526	376	**1527**	**376**
437.leslie3d	48	**1584**	**285**	1583	285	1586	284	48	**1584**	**285**	1583	285	1586	284
444.namd	48	1139	338	**1142**	**337**	1142	337	48	1145	336	1140	338	**1144**	**337**
447.dealII	48	792	694	**793**	**692**	799	687	48	792	694	**793**	**692**	799	687
450.soplex	48	1357	295	**1357**	**295**	1354	296	48	1449	276	1280	313	**1312**	**305**
453.povray	48	**530**	**482**	528	484	530	482	48	450	567	**448**	**569**	448	570
454.calculix	48	793	500	**793**	**500**	794	499	48	790	501	**788**	**503**	787	503
459.GemsFDTD	48	1986	256	**1990**	**256**	1995	255	24	963	264	**961**	**265**	957	266
465.tonto	48	1200	393	**1202**	**393**	1205	392	48	**1070**	**441**	1067	443	1088	434
470.lbm	48	2814	234	2810	235	**2811**	**235**	48	2814	234	2810	235	**2811**	**235**
481.wrf	48	1167	459	**1167**	**459**	1164	460	48	1157	464	**1168**	**459**	1172	457
482.sphinx3	48	2468	379	2475	378	**2470**	**379**	48	2456	381	**2452**	**382**	2449	382

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
 The Apache C++ Standard Library V4.2.1 was installed from
http://stdcxx.apache.org/download.html using:
     alias gmake=specmake
     gmake BUILDTYPE=8D CONFIG=sunpro.config
```

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
ulimit -s unlimited  (shell)

/etc/system parameters
   tune_t_fsflushr=10
   autoup=900
   lpg_alloc_prefer=1
```

Platform Notes

```
  The system automatically configures the memory to run at 978 MHz.
  Default BIOS settings used.
```

General Notes

```
Environment variables set by runspec before the start of the run:
SUNW_MP_PROCBIND = "TRUE"
SUNW_MP_THR_IDLE = "SPIN"

447.dealII (peak): "apache_stdcxx_4_2_1" src.alt was used.

447.dealII (base): "apache_stdcxx_4_2_1" src.alt was used.
```

Base Compiler Invocation

C benchmarks:
`cc`

C++ benchmarks:
`CC`

Fortran benchmarks:
`f90`

Benchmarks using both Fortran and C:
`cc f90`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_WORDS_LITTLEENDIAN
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -xipo=2 -m64 -xpagesize=2M -xalias_level=std

C++ benchmarks:
-fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-library=no%Cstd -I/data1/stdcxx-4.2.1/include
-I/data1/stdcxx-4.2.1/build/include -L/data1/stdcxx-4.2.1/build/lib
-R/data1/stdcxx-4.2.1/build/lib -lstd8D

Fortran benchmarks:
-fast -xipo=2 -m64 -xpagesize=2M

Benchmarks using both Fortran and C:
-fast(cc) -xipo=2 -m64 -xpagesize=2M -xalias_level=std -fast(f90)

Base Other Flags

C benchmarks:
-V -# -xjobs=48

C++ benchmarks:
-verbose=diags,version -xjobs=48

Fortran benchmarks:
-V -v -xjobs=48

Benchmarks using both Fortran and C:
-V -# -xjobs=48 -v

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Portability Flags

433.milc: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
437.leslie3d: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_WORDS_LITTLEENDIAN

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=std
-xunroll=3 -xprefetch=no%auto

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xalias_level=compatible -library=stlport4

447.dealII: basepeak = yes

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xalias_level=compatible -library=stlport4
-m32 -qoption iropt -Rujam -qoption iropt -Rtile

Continued on next page

Peak Optimization Flags (Continued)

453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xvector=no%simd -xalias_level=compatible
-library=stlport4

Fortran benchmarks:

410.bwaves: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M

416.gamess: -fast -xipo=2 -m64 -xpagesize=2M -xunroll=1
-xvector=no%simd

434.zeusmp: Same as 410.bwaves

437.leslie3d: basepeak = yes

459.GemsFDTD: Same as 410.bwaves

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xvector=lib -xalias -lbsdmalloc

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -m64 -xpagesize=2M -Qoption ube -fsimple=3

436.cactusADM: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m64 -fast(cc) -fast(f90)
-xipo=0 -xpagesize=2M -xprefetch_level=2 -lumem

454.calculix: -fast(cc) -fast(f90) -xipo=2 -m64 -xpagesize=2M
-xunroll=3 -xprefetch_level=2
-xprefetch_auto_type=indirect_array_access

481.wrf: -fast(cc) -fast(f90) -xipo=2 -m64 -xpagesize=2M

Peak Other Flags

C benchmarks:
-V -# -xjobs=48

C++ benchmarks:
-verbose=diags,version -xjobs=48

Continued on next page

Peak Other Flags (Continued)

Fortran benchmarks:
`-V -v -xjobs=48`

Benchmarks using both Fortran and C:
`-V -# -xjobs=48 -v`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio-x86_64.20100901.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio-x86_64.20100901.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:25:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 November 2010.