



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6168

SPECfp®2006 = 28.0

SPECfp_base2006 = 20.2

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

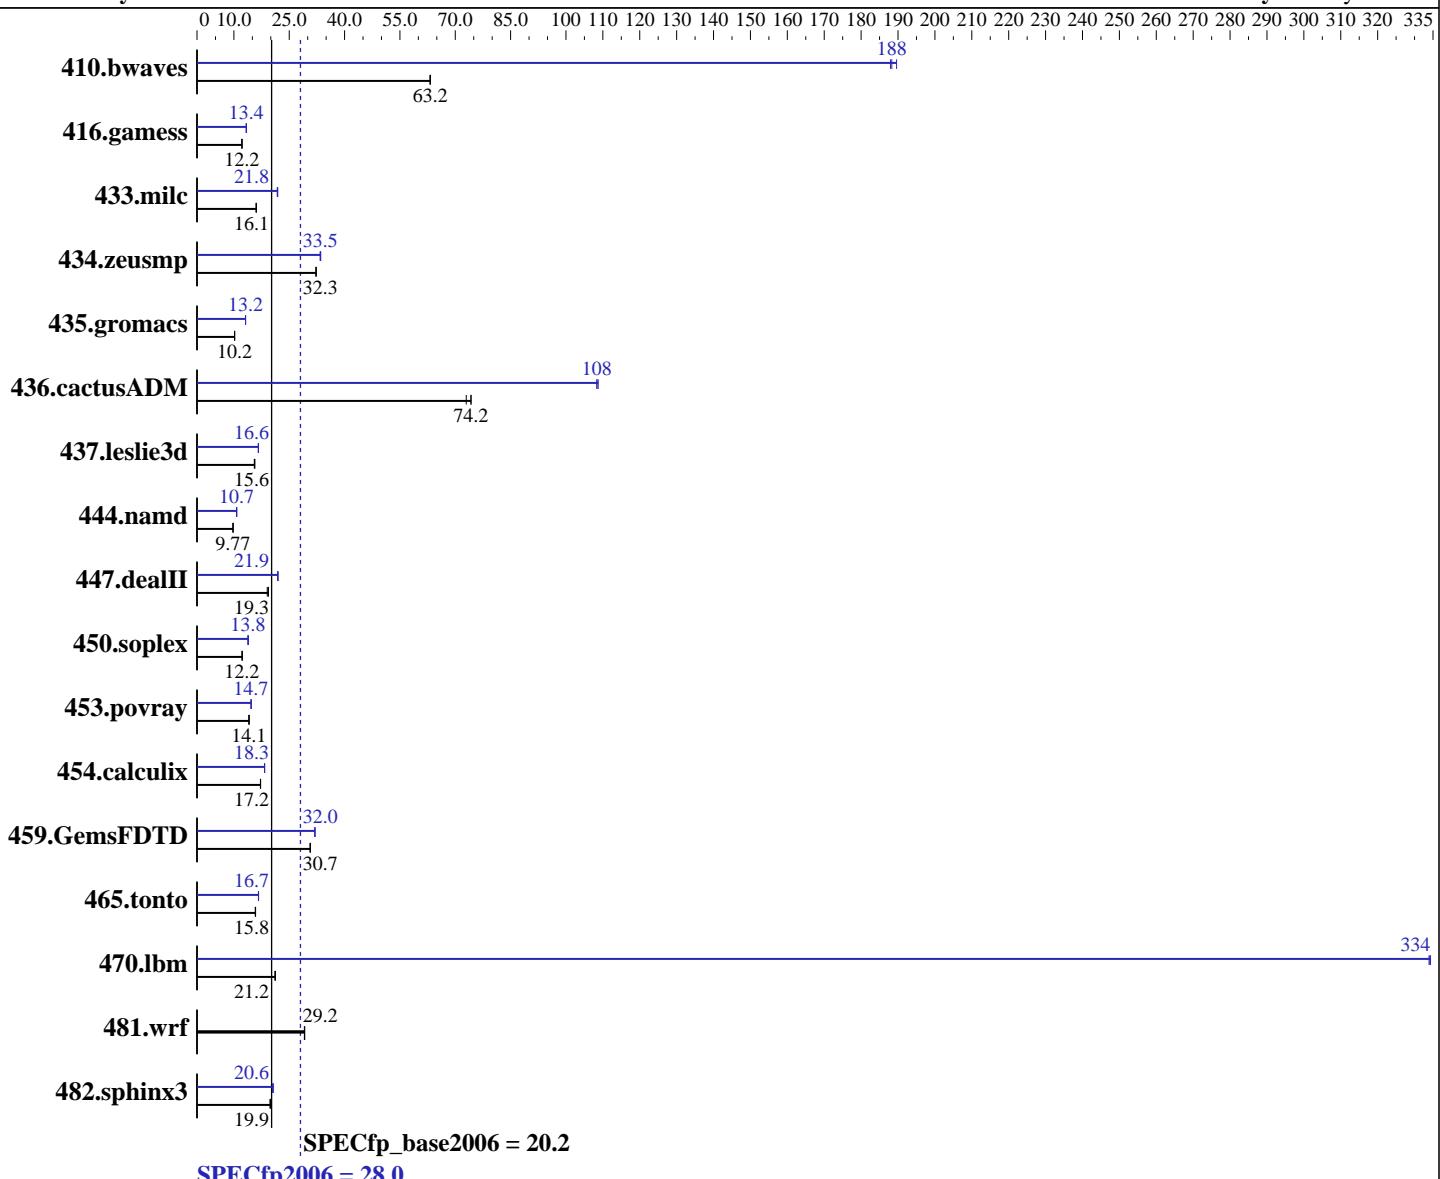

Hardware

CPU Name: AMD Opteron 6168
 CPU Characteristics:
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 5.4, Advanced Platform with patch RHSA-2009:1670, Kernel 2.6.18-164.9.1.el5
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6168

SPECfp2006 = 28.0

SPECfp_base2006 = 20.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	215	63.2	215	63.2	215	63.2	72.3	188	71.7	190	72.2	188
416.gamess	1603	12.2	1612	12.1	1606	12.2	1469	13.3	1463	13.4	1462	13.4
433.milc	571	16.1	570	16.1	573	16.0	419	21.9	422	21.7	421	21.8
434.zeusmp	282	32.3	282	32.2	282	32.3	272	33.5	271	33.5	273	33.4
435.gromacs	700	10.2	701	10.2	701	10.2	543	13.2	542	13.2	543	13.2
436.cactusADM	161	74.2	164	73.0	161	74.3	110	108	110	109	110	108
437.leslie3d	601	15.6	600	15.7	605	15.5	565	16.6	564	16.7	565	16.6
444.namd	821	9.77	821	9.77	821	9.77	748	10.7	744	10.8	746	10.7
447.dealII	591	19.4	593	19.3	601	19.0	523	21.9	522	21.9	521	21.9
450.soplex	681	12.2	681	12.2	682	12.2	602	13.8	599	13.9	604	13.8
453.povray	379	14.0	376	14.1	377	14.1	362	14.7	363	14.7	362	14.7
454.calculix	480	17.2	479	17.2	479	17.2	451	18.3	450	18.3	451	18.3
459.GemsFDTD	346	30.7	346	30.7	346	30.7	332	32.0	332	32.0	332	32.0
465.tonto	622	15.8	620	15.9	622	15.8	591	16.7	590	16.7	590	16.7
470.lbm	648	21.2	650	21.1	646	21.3	41.1	334	41.1	334	41.1	334
481.wrf	383	29.2	384	29.1	383	29.2	383	29.2	384	29.1	383	29.2
482.sphinx3	986	19.8	979	19.9	977	19.9	948	20.6	943	20.7	950	20.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=4000 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6168

SPECfp2006 = 28.0

SPECfp_base2006 = 20.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"  
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23"  
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
          -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6168

SPECfp2006 = 28.0

SPECfp_base2006 = 20.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Base Optimization Flags

C benchmarks:

```
-march=barcelona -Ofast -HP:bdt=2m:heap=2m
```

C++ benchmarks:

```
-march=barcelona -Ofast -static -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m
```

Fortran benchmarks:

```
-march=barcelona -Ofast -apo -LNO:parallel_overhead=10000  
-LNO:fusion_peeling_limit=0 -HP:bdt=2m:heap=2m
```

Benchmarks using both Fortran and C:

```
-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo  
-LNO:parallel_overhead=10000 -LNO:fusion_peeling_limit=0
```

Peak Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6168

SPECfp2006 = 28.0

SPECfp_base2006 = 20.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

```
433.milc: -march=barcelona -Ofast -apo -CG:movnti=1
           -CG:local_sched_alg=1 -CG:locs_shallow_depth=1
           -CG:compute_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3
```

```
470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse_cse_regs=0
           -LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
           -CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
           -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
           -OPT:alias=restricted -m3dnow -IPA:inline=off
```

```
482.sphinx3: -march=barcelona -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
              -CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
              -CG:local_sched_alg=1 -INLINE:aggressive=on
```

C++ benchmarks:

```
444.namd: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
           -CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
           -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m
```

```
447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
             -LNO:opt=0 -fno-emit-exceptions -m32
             -OPT:unroll_times_max=8 -OPT:unroll_size=256
             -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
             -CG:cmp_peep=on -TENV:frame_pointer=off
```

```
450.soplex: -march=barcelona -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
              -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
              -OPT:fold_unsigned_relops=on -CG:load_exe=0 -fno-exceptions
              -m32 -HP:bdt=2m:heap=2m
```

```
453.povray: -march=barcelona -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
              -HP:bdt=2m:heap=2m
```

Fortran benchmarks:

```
410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc_alg=2
             -CG:use_prefetchnta=on -CG:cmp_peep=on -LNO:blocking=off
             -LNO:prefetch=3 -LNO:prefetch_ahead=5
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6168

SPECfp2006 =

28.0

SPECfp_base2006 =

20.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date:

Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Optimization Flags (Continued)

410.bwaves (continued):

```
-LNO:ignore_feedback=off -LNO:apo_use_feedback=on
-WOPT:aggstr=0
```

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off
-
-LNO:interchange=off -LNO:fusion_peeling_limit=0
-
-OPT:treeheight=on -OPT:unroll_size=256 -CG:cmp_peep=on
-
-CG:compute_to=on -GRA:prioritize_by_density=on
-
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll_size=256
-
-LNO:prefetch_ahead=4 -LNO:parallel_overhead=32768
-
-GRA:prioritize_by_density=on -m3dnow -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2
-
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-
-HP

465.tonto: -march=barcelona -Ofast -apo
-
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2
-
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-
-fb_opt fbdata(pass 2) -Ofast -apo
-
-LANG:heap_allocation_threshold=1000 -LNO:prefetch_ahead=1
-
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch_ahead=30
-
-CG:load_exe=0 -CG:ptr_load_use=0 -CG:local_sched_alg=2
-
-CG:compute_to=on -WOPT:unroll=2 -GRA:optimize_boundary=on
-
-HP:bdt=2m:heap=2m -apo

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6168

SPECfp2006 = 28.0

SPECfp_base2006 = 20.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:12:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 December 2010.