SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH57JG Motherboard (Intel Core i5-650)

SPECfp®_rate2006 = 50.2

SPECfp_rate_base2006 = 49.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2010
Hardware Availability: Jan-2010
Software Availability: Sep-2009

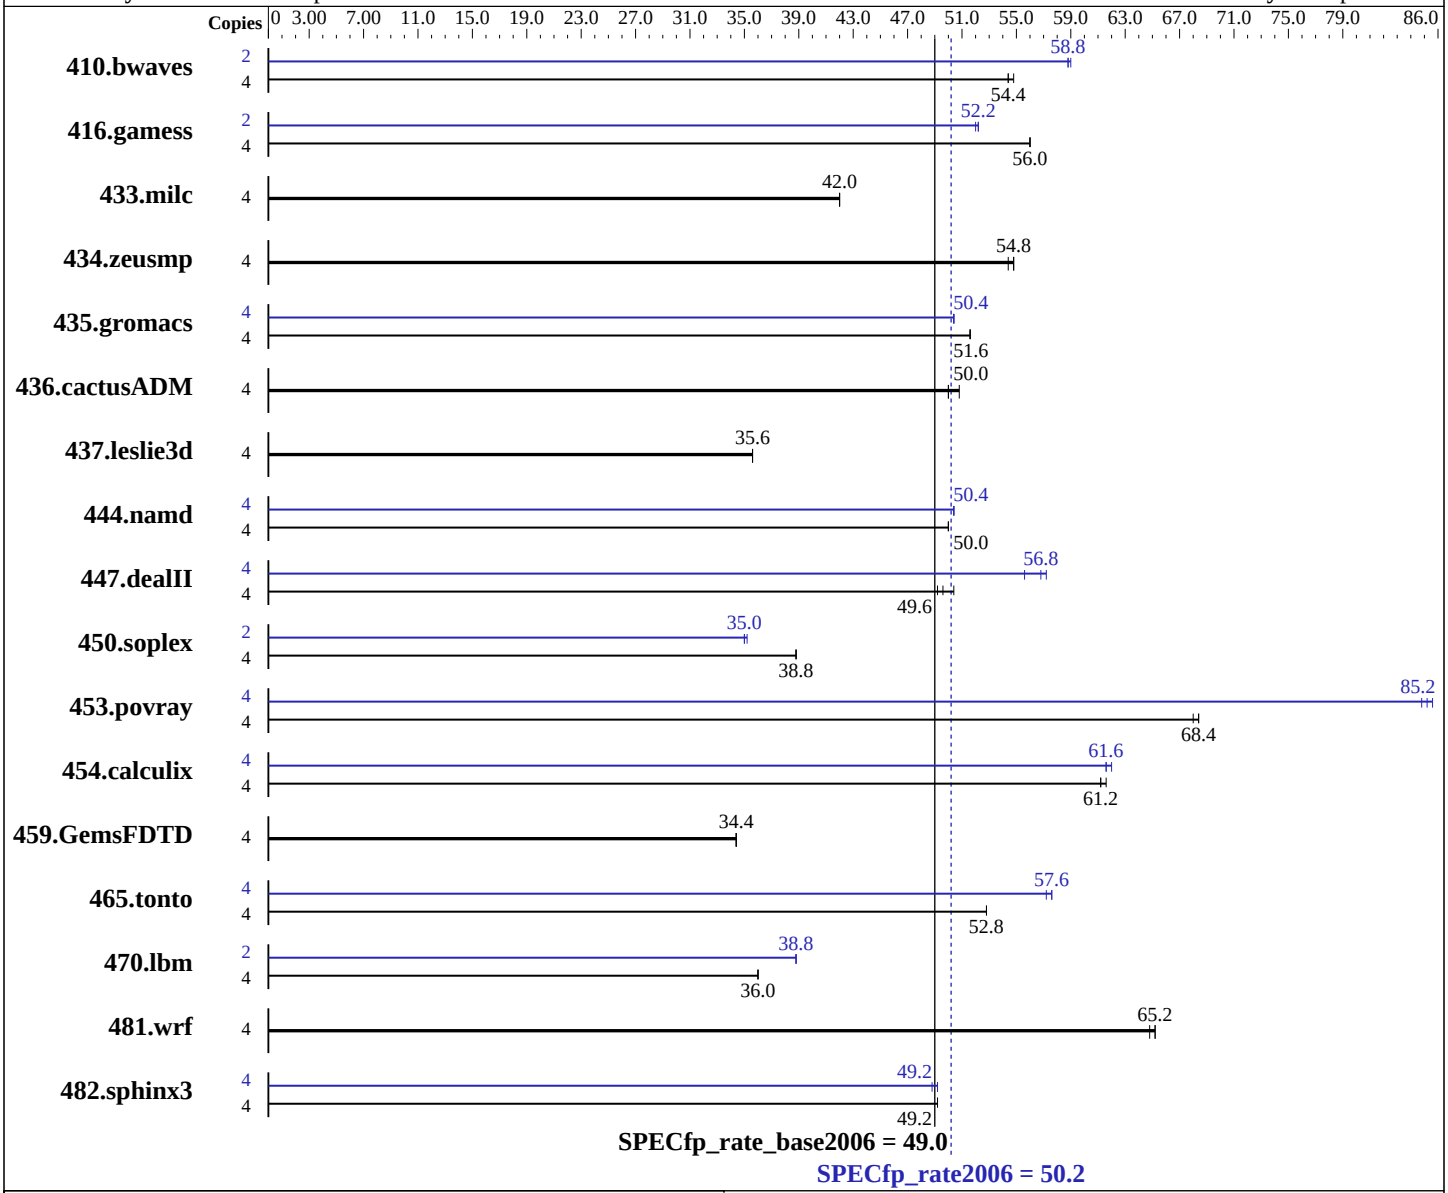

Hardware

CPU Name:	Intel Core i5-650
CPU Characteristics:	Intel Turbo Boost Technology up to 3.46 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045 Intel Visual Fortran Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045, w_cprof_p_11.1.045 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH57JG Motherboard (Intel Core i5-650)

SPECfp_rate2006 = 50.2

SPECfp_rate_base2006 = 49.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2010
Hardware Availability: Jan-2010
Software Availability: Sep-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (2 x 2 GB 2Rx8 PC3-10600U-9)
Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None
SmartHeap Library Version 8.1 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1001	54.4	**997**	**54.4**	995	54.8	2	**462**	**58.8**	462	58.8	461	59.0
416.gamess	4	**1399**	**56.0**	1398	56.0	1403	56.0	2	**752**	**52.2**	751	52.2	752	52.0
433.milc	4	871	42.0	874	42.0	**873**	**42.0**	4	871	42.0	874	42.0	**873**	**42.0**
434.zeusmp	4	**665**	**54.8**	664	54.8	667	54.4	4	**665**	**54.8**	664	54.8	667	54.4
435.gromacs	4	552	51.6	553	51.6	**553**	**51.6**	4	**568**	**50.4**	567	50.4	568	50.4
436.cactusADM	4	944	50.8	**957**	**50.0**	957	50.0	4	944	50.8	**957**	**50.0**	957	50.0
437.leslie3d	4	**1055**	**35.6**	1055	35.6	1053	35.6	4	**1055**	**35.6**	1055	35.6	1053	35.6
444.namd	4	**643**	**50.0**	644	50.0	643	50.0	4	638	50.4	637	50.4	**638**	**50.4**
447.dealII	4	926	49.2	**925**	**49.6**	908	50.4	4	823	55.6	800	57.2	**807**	**56.8**
450.soplex	4	858	38.8	**862**	**38.8**	863	38.8	2	**476**	**35.0**	475	35.2	476	35.0
453.povray	4	**312**	**68.4**	311	68.4	312	68.0	4	**250**	**85.2**	251	84.8	249	85.6
454.calculix	4	537	61.6	541	61.2	**538**	**61.2**	4	**535**	**61.6**	532	62.0	536	61.6
459.GemsFDTD	4	1236	34.4	1239	34.4	**1239**	**34.4**	4	1236	34.4	1239	34.4	**1239**	**34.4**
465.tonto	4	745	52.8	**745**	**52.8**	743	52.8	4	686	57.2	**685**	**57.6**	683	57.6
470.lbm	4	1527	36.0	1528	36.0	**1528**	**36.0**	2	707	38.8	708	38.8	**707**	**38.8**
481.wrf	4	688	64.8	**686**	**65.2**	684	65.2	4	688	64.8	**686**	**65.2**	684	65.2
482.sphinx3	4	1584	49.2	1581	49.2	**1582**	**49.2**	4	**1584**	**49.2**	1594	48.8	1584	49.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 /Qlowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000
-link /FORCE:MULTIPLE

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

482.sphinx3: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qscalar-rep- -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

416.gamess: Same as 410.bwaves

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

436.cactusADM: basepeak = yes

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH57JG Motherboard (Intel Core i5-650)

SPECfp_rate2006 = 50.2

SPECfp_rate_base2006 = 49.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2010
Hardware Availability: Jan-2010
Software Availability: Sep-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:49:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.