



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu SPARC Enterprise M8000

SPECfp[®]_rate2006 = 786

SPECfp_rate_base2006 = 711

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

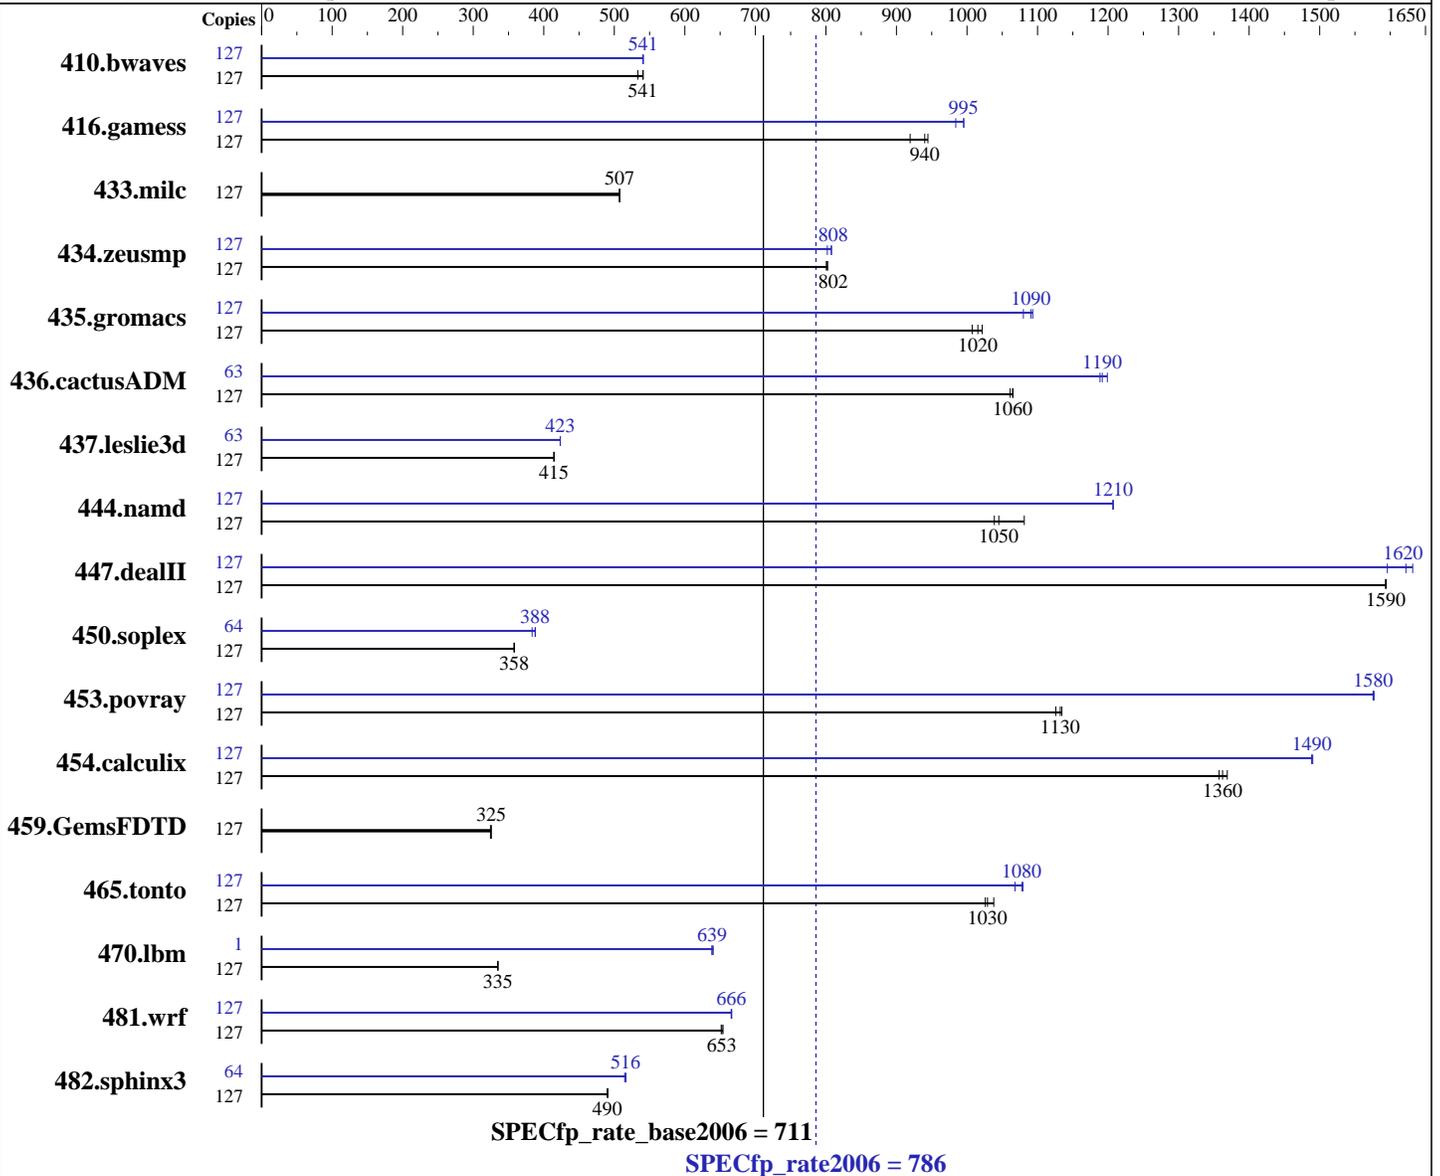

Hardware

CPU Name: SPARC64 VII+
 CPU Characteristics:
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 64 cores, 16 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 4 CMUs; each CMU contains 2 or 4 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip

Continued on next page

Software

Operating System: Oracle Solaris 10 9/10
 Compiler: Oracle Solaris Studio 12.2
 Auto Parallel: Yes
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu SPARC Enterprise M8000

SPECfp_rate2006 = **786**

SPECfp_rate_base2006 = **711**

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

L3 Cache: None
Other Cache: None
Memory: 512 GB (128 x 4 GB, 8-way interleaved)
Disk Subsystem: 698 GB mirrored partition on
12 x 146 GB 15K RPM SAS disks
in each of 2 StorageTek 2530 Array
(24 total disk, 12 in each array)
Other Hardware: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	127	3235	533	3191	541	3192	541	127	3191	541	3192	541	3191	541		
416.gamess	127	2645	940	2632	945	2705	919	127	2499	995	2498	996	2527	984		
433.milc	127	2297	508	2298	507	2297	507	127	2297	508	2298	507	2297	507		
434.zeusmp	127	1441	802	1440	802	1444	801	127	1441	802	1431	808	1430	808		
435.gromacs	127	900	1010	888	1020	893	1020	127	840	1080	831	1090	829	1090		
436.cactusADM	127	1426	1060	1425	1070	1430	1060	63	633	1190	632	1190	628	1200		
437.leslie3d	127	2881	414	2880	415	2879	415	63	1399	423	1399	423	1399	423		
444.namd	127	981	1040	942	1080	975	1050	127	844	1210	844	1210	844	1210		
447.dealII	127	912	1590	911	1590	912	1590	127	896	1620	890	1630	910	1600		
450.soplex	127	2958	358	2954	359	2960	358	64	1392	384	1377	388	1375	388		
453.povray	127	596	1130	600	1130	597	1130	127	429	1580	429	1580	428	1580		
454.calculix	127	769	1360	765	1370	772	1360	127	704	1490	703	1490	704	1490		
459.GemsFDTD	127	4141	325	4153	324	4141	325	127	4141	325	4153	324	4141	325		
465.tonto	127	1214	1030	1204	1040	1218	1030	127	1158	1080	1160	1080	1170	1070		
470.lbm	127	5210	335	5210	335	5210	335	1	21.5	640	21.5	638	21.5	639		
481.wrf	127	2174	653	2177	652	2169	654	127	2131	666	2128	667	2131	666		
482.sphinx3	127	5049	490	5049	490	5042	491	64	2415	517	2423	515	2418	516		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
118683-05 119963-20 120753-08

Oracle Solaris Studio 12.2 and patches are available at
<http://oracle.com/goto/solarisstudio>

The Apache C++ Standard Library V4.2.1 was installed from
<http://stdcxx.apache.org/download.html> using:
alias gmake=specmake
gmake BUILDTYPE=8d CONFIG=sunpro.config



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp_rate2006 = 786

SPECfp_rate_base2006 = 711

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

/etc/system parameters

autoup=600

Causes pages older than the listed number of seconds to be written by fsflush.

tune_t_fsflushr=10

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

lpg_alloc_prefer=1

Indicates that extra effort should be taken to ensure

that pages are created in the nearby lgroup (NUMA location).

The "webconsole" service was turned off using

svcadm disable webconsole

The system had 75 GB of swap space.

Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a SPARC Enterprise M8000 server from Oracle. The SPARC Enterprise M8000 server from Oracle and from Fujitsu are electrically equivalent.

General Notes

Environment variables set by runspec before the start of the run:

OMP_NUM_THREADS = "128"

SUNW_MP_PROCBIND = "127 126 125 124 123 122 121 120 119 118 117 116

115 114 113 112 111 110 109 108 107 106 105 104 103 102 101 100 99

98 97 96 95 94 93 92 91 90 89 88 87 86 85 84 83 82 81 80 79 78 77

76 75 74 73 72 71 70 69 68 67 66 65 64 63 62 61 60 59 58 57 56 55

54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33

32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11

10 9 8 7 6 5 4 3 2 1 0"

SUNW_MP_THR_IDLE = "SPIN"

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp_rate2006 = 786

SPECfp_rate_base2006 = 711

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

General Notes (Continued)

447.dealII (peak): "apache_stdccx_4_2_1" src.alt was used.
447.dealII (base): "apache_stdccx_4_2_1" src.alt was used.

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xalias_level=std
-xprefetch_auto_type=indirect_array_access -xprefetch_level=3
-fsimple=1

C++ benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xalias_level=compatible
-xdepend -xprefetch=latx:0.5 -library=no%Cstd
-I/export/home/apache/stdccx-4.2.1/include
-I/export/home/apache/stdccx-4.2.1/build/include
-L/export/home/apache/stdccx-4.2.1/build/lib
-R/export/home/apache/stdccx-4.2.1/build/lib -lstd8d

Fortran benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M

Benchmarks using both Fortran and C:
-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M
-xalias_level=std -xprefetch_auto_type=indirect_array_access
-xprefetch_level=3 -fsimple=1

Base Other Flags

C benchmarks:
-xjobs=32 -V -#

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp_rate2006 = 786

SPECfp_rate_base2006 = 711

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Base Other Flags (Continued)

C++ benchmarks:
-xjobs=32 -verbose=diags,version

Fortran benchmarks:
-xjobs=32 -V -v

Benchmarks using both Fortran and C:
-xjobs=32 -V -# -v

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=3
-xvector -xarch=generic -xautopar -xreduction

482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xinline= -xalias_level=strong
-xprefetch_level=2 -lfast -l12amm

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=any -xdepend -library=stlport4 -fma=fused
-xipo=2 -xchip=generic -xunroll=2

447.dealIII: -fast -xpagesize=4M -xalias_level=compatible -xdepend
-library=no%Cstd -I/export/home/apache/stdcxx-4.2.1/include
-I/export/home/apache/stdcxx-4.2.1/build/include -fma=fused

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp_rate2006 = 786

SPECfp_rate_base2006 = 711

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

447.dealIII (continued):

```
-xipo=2 -xprefetch=latx:0.5  
-L/export/home/apache/stdcxx-4.2.1/build/lib  
-R/export/home/apache/stdcxx-4.2.1/build/lib -lstd8d
```

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xdepend -library=stlport4
-fma=fused -xipo=2 -xrestrict -xprefetch=no -ll2amm

453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xdepend -fma=fused -xipo=2
-xlinkopt=2 -xprefetch=no -xunroll=4 -xO4 -lfast

Fortran benchmarks:

410.bwaves: -fast -xpagesize=4M -fma=fused -xipo=2

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xprefetch=no%auto -xO3

434.zeusmp: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=1
-ll2amm -xunroll=5

437.leslie3d: -fast -xpagesize=4M -M /usr/lib/ld/map.bssalign
-xprefetch=no

459.GemsFDTD: basepeak = yes

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xprefetch=no -lfast -ll2amm

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xtarget=generic -xinline=
-fsimple=0 -xlinkopt -xvector -xdepend

436.cactusADM: -fast(cc) -fast(f90) -xpagesize=4M -fma=fused -xipo=2

454.calculix: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xvector
-xprefetch=latx:3 -xalias_level=std

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M8000

SPECfp_rate2006 = 786

SPECfp_rate_base2006 = 711

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

Peak Optimization Flags (Continued)

```
481.wrf: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access -l12amm
```

Peak Other Flags

C benchmarks:
-xjobs=32 -V -#

C++ benchmarks:
-xjobs=32 -verbose=diags,version

Fortran benchmarks:
-xjobs=32 -V -v

Benchmarks using both Fortran and C:
-xjobs=32 -V -# -v

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:47:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.