



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

**SPECint®\_rate2006 = 168**

PRIMERGY BX922 S2, Intel Xeon E5649, 2.53 GHz

**SPECint\_rate\_base2006 = 158**

CPU2006 license: 19


Test date: Feb-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Jan-2011

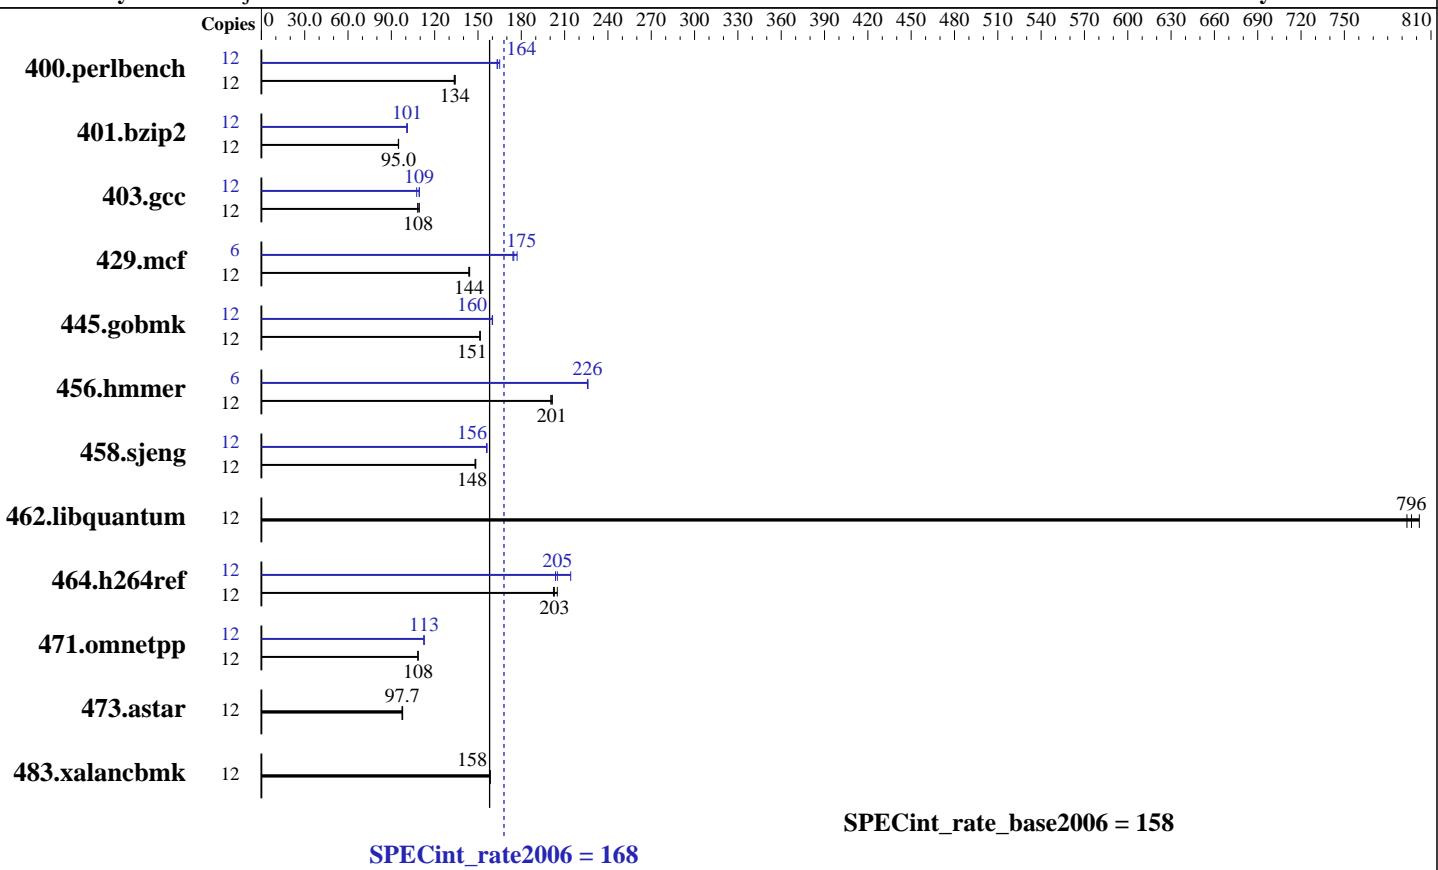

**SPECint\_rate\_base2006 = 158**

## Hardware

CPU Name: Intel Xeon E5649  
CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
CPU MHz: 2533  
FPU: Integrated  
CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
Other Hardware: --

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5649, 2.53 GHz

**SPECint\_rate2006 = 168**

**SPECint\_rate\_base2006 = 158**

CPU2006 license: 19

Test date: Feb-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Jan-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	<b>876</b>	<b>134</b>	873	134	878	134	12	710	165	718	163	<b>717</b>	<b>164</b>
401.bzip2	12	1219	95.0	1221	94.8	<b>1219</b>	<b>95.0</b>	12	1146	101	1150	101	<b>1147</b>	<b>101</b>
403.gcc	12	<b>890</b>	<b>108</b>	892	108	883	109	12	<b>884</b>	<b>109</b>	883	109	898	108
429.mcf	12	762	144	<b>760</b>	<b>144</b>	759	144	6	<b>313</b>	<b>175</b>	309	177	314	174
445.gobmk	12	831	152	<b>831</b>	<b>151</b>	832	151	12	786	160	787	160	<b>787</b>	<b>160</b>
456.hmmer	12	<b>557</b>	<b>201</b>	559	200	556	201	6	247	226	<b>248</b>	<b>226</b>	248	226
458.sjeng	12	978	149	981	148	<b>980</b>	<b>148</b>	12	<b>931</b>	<b>156</b>	929	156	931	156
462.libquantum	12	<b>312</b>	<b>796</b>	310	802	313	793	12	<b>312</b>	<b>796</b>	310	802	313	793
464.h264ref	12	1313	202	1296	205	<b>1309</b>	<b>203</b>	12	1304	204	<b>1296</b>	<b>205</b>	1240	214
471.omnetpp	12	692	108	691	108	<b>691</b>	<b>108</b>	12	666	113	665	113	<b>666</b>	<b>113</b>
473.astar	12	865	97.4	861	97.8	<b>863</b>	<b>97.7</b>	12	865	97.4	861	97.8	<b>863</b>	<b>97.7</b>
483.xalancbmk	12	523	158	<b>523</b>	<b>158</b>	523	158	12	523	158	<b>523</b>	<b>158</b>	523	158

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
Hugepages were not configured on the system

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disable  
Performance/Power Setting = Traditional

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5649, 2.53 GHz

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

**SPECint\_rate2006 = 168**

**SPECint\_rate\_base2006 = 158**

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5649, 2.53 GHz

SPECint\_rate2006 = 168

SPECint\_rate\_base2006 = 158

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT  
  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT  
  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT  
  
429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32  
  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32  
  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT  
  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5649, 2.53 GHz

**SPECint\_rate2006 = 168**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

471.omnetpp (continued):  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110316.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 16:49:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 March 2011.