SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GR385 F1 (AMD Opteron 6176)

SPECfp®_rate2006 = 311

SPECfp_rate_base2006 = 292

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Apr-2011
Hardware Availability: Feb-2011
Software Availability: Aug-2010

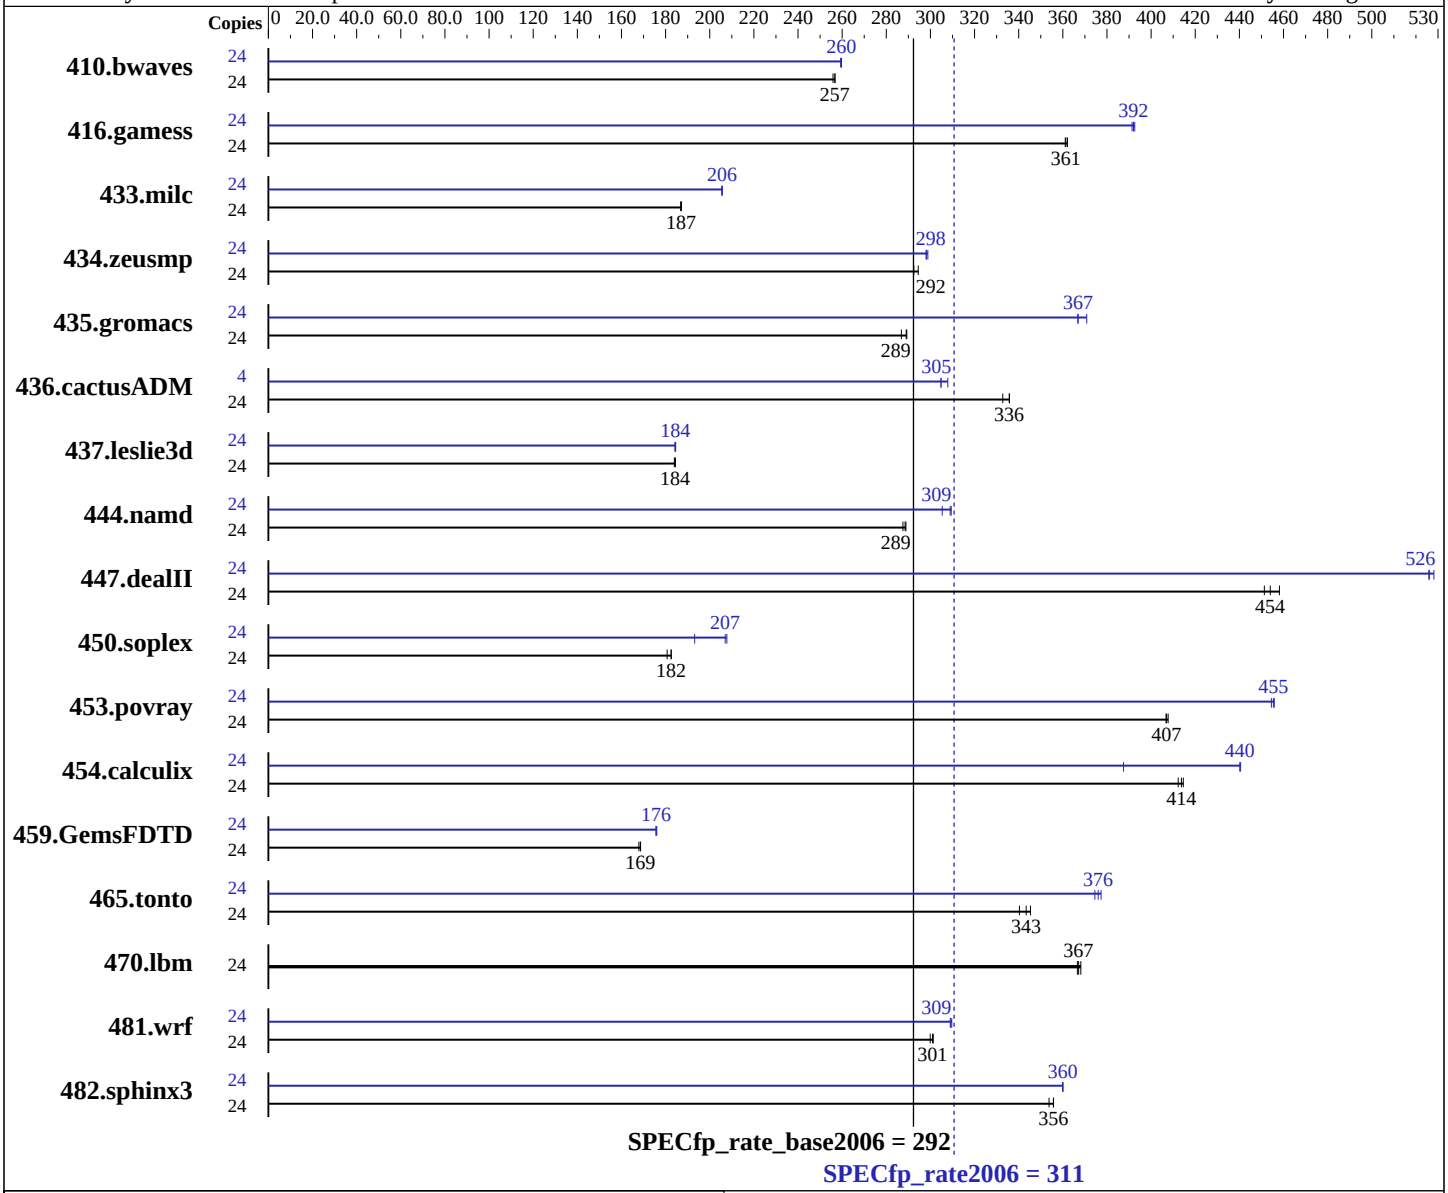

Hardware

CPU Name:	AMD Opteron 6176
CPU Characteristics:	
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1 Kernel 2.6.32.12-0.7-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multiuser)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GR385 F1 (AMD Opteron 6176)

SPECfp_rate2006 = 311

SPECfp_rate_base2006 = 292

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Apr-2011
Hardware Availability: Feb-2011
Software Availability: Aug-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 64 GB (16 x 4 GB 2Rx8 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 300 GB SATA, 10000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1275	256	**1271**	**257**	1270	257	24	1256	260	1258	259	**1256**	**260**
416.gamess	24	1301	361	1298	362	**1300**	**361**	24	1201	391	1197	393	**1199**	**392**
433.milc	24	1179	187	1177	187	**1178**	**187**	24	1071	206	1072	205	**1072**	**206**
434.zeusmp	24	747	292	742	294	**747**	**292**	24	733	298	731	299	**733**	**298**
435.gromacs	24	**593**	**289**	597	287	592	289	24	**467**	**367**	467	367	462	371
436.cactusADM	24	**854**	**336**	854	336	862	333	4	**157**	**305**	155	308	157	305
437.leslie3d	24	1223	184	**1224**	**184**	1226	184	24	1222	185	**1223**	**184**	1225	184
444.namd	24	669	288	**667**	**289**	666	289	24	630	305	**623**	**309**	622	309
447.dealII	24	599	458	608	451	**605**	**454**	24	**522**	**526**	520	528	522	526
450.soplex	24	1108	181	1097	183	**1097**	**182**	24	1036	193	963	208	**967**	**207**
453.povray	24	314	407	**314**	**407**	313	408	24	280	456	**280**	**455**	281	455
454.calculix	24	478	415	**479**	**414**	480	412	24	511	388	449	441	**450**	**440**
459.GemsFDTD	24	**1511**	**169**	1517	168	1510	169	24	**1449**	**176**	1447	176	1450	176
465.tonto	24	684	345	694	340	**688**	**343**	24	631	375	626	377	**628**	**376**
470.lbm	24	**898**	**367**	900	367	896	368	24	**898**	**367**	900	367	896	368
481.wrf	24	**891**	**301**	894	300	890	301	24	866	310	868	309	**867**	**309**
482.sphinx3	24	1322	354	1315	356	**1315**	**356**	24	**1299**	**360**	1300	360	1299	360

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"
OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
This result was measured on the Gateway GR385 F1.
The Acer AR385 F1 and Gateway GR385 F1 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m
```

C++ benchmarks:
```
-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m
```

Fortran benchmarks:
```
-march=barcelona -mso -Ofast -HP
```

Benchmarks using both Fortran and C:
```
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP
```

Peak Compiler Invocation

C benchmarks:
```
opencc
```

C++ benchmarks:
```
openCC
```

Fortran benchmarks:
```
openf95
```

Benchmarks using both Fortran and C:
```
opencc openf95
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page

Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -mso -Ofast
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on
-LNO:prefetch_ahead=30 -WOPT:unroll=2
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
-HP

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:58:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 May 2011.