



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint®_rate2006 = 306

Gateway GR360 F1 (Intel Xeon X5672)

SPECint_rate_base2006 = 290

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Apr-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

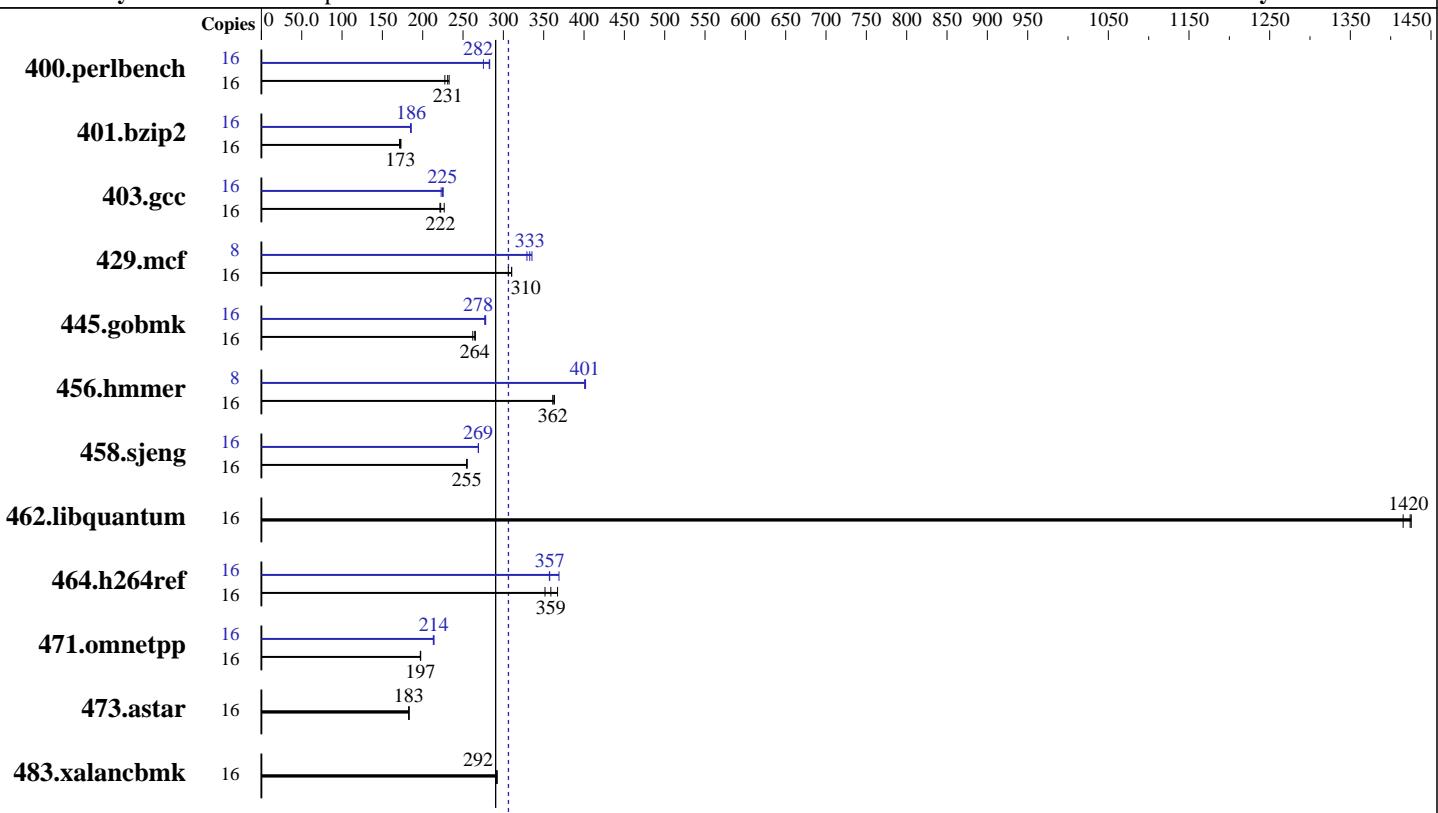

SPECint_rate_base2006 = 290

SPECint_rate2006 = 306

Hardware

CPU Name:	Intel Xeon X5672
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB 2Rx8 PC3-10600R-9,ECC)
Disk Subsystem:	1 x 300 GB SATA, 10000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 306

Gateway GR360 F1 (Intel Xeon X5672)

SPECint_rate_base2006 = 290

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	687	227	672	233	677	231	16	568	275	553	282	552	283
401.bzip2	16	902	171	895	173	893	173	16	835	185	832	186	832	186
403.gcc	16	568	227	580	222	582	221	16	574	225	571	225	578	223
429.mcf	16	477	306	470	310	470	310	8	222	329	219	333	217	335
445.gobmk	16	633	265	641	262	635	264	16	604	278	606	277	605	278
456.hammer	16	413	362	413	361	411	363	8	186	401	186	401	186	402
458.sjeng	16	759	255	761	254	760	255	16	719	269	720	269	719	269
462.libquantum	16	233	1430	233	1420	234	1420	16	233	1430	233	1420	234	1420
464.h264ref	16	964	367	987	359	1007	352	16	960	369	991	357	992	357
471.omnetpp	16	506	198	507	197	507	197	16	468	214	469	213	468	214
473.astar	16	614	183	614	183	614	183	16	614	183	614	183	614	183
483.xalancbmk	16	378	292	378	292	378	292	16	378	292	378	292	378	292

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
Large pages were disabled for this run

Platform Notes

BIOS Settings:
Fan speed = full speed (Default = Balanced)
Data Reuse = Disabled (Default = Enabled)

General Notes

Binaries compiled on RHEL5.5
This result was measured on the Gateway GR380 F1.
The Acer AR360 F1, AR380 F1, Gateway GR360 F1 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 306

Gateway GR360 F1 (Intel Xeon X5672)

SPECint_rate_base2006 = 290

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 306

Gateway GR360 F1 (Intel Xeon X5672)

SPECint_rate_base2006 = 290

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 306

Gateway GR360 F1 (Intel Xeon X5672)

SPECint_rate_base2006 = 290

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

471.omnetpp (continued):

-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 18:20:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 June 2011.