



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AW2000h-AW175h F1 (AMD Opteron 6134)

SPECint_rate2006 = 285

SPECint_rate_base2006 = 245

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Apr-2011

Hardware Availability: Aug-2010

Software Availability: Jul-2010

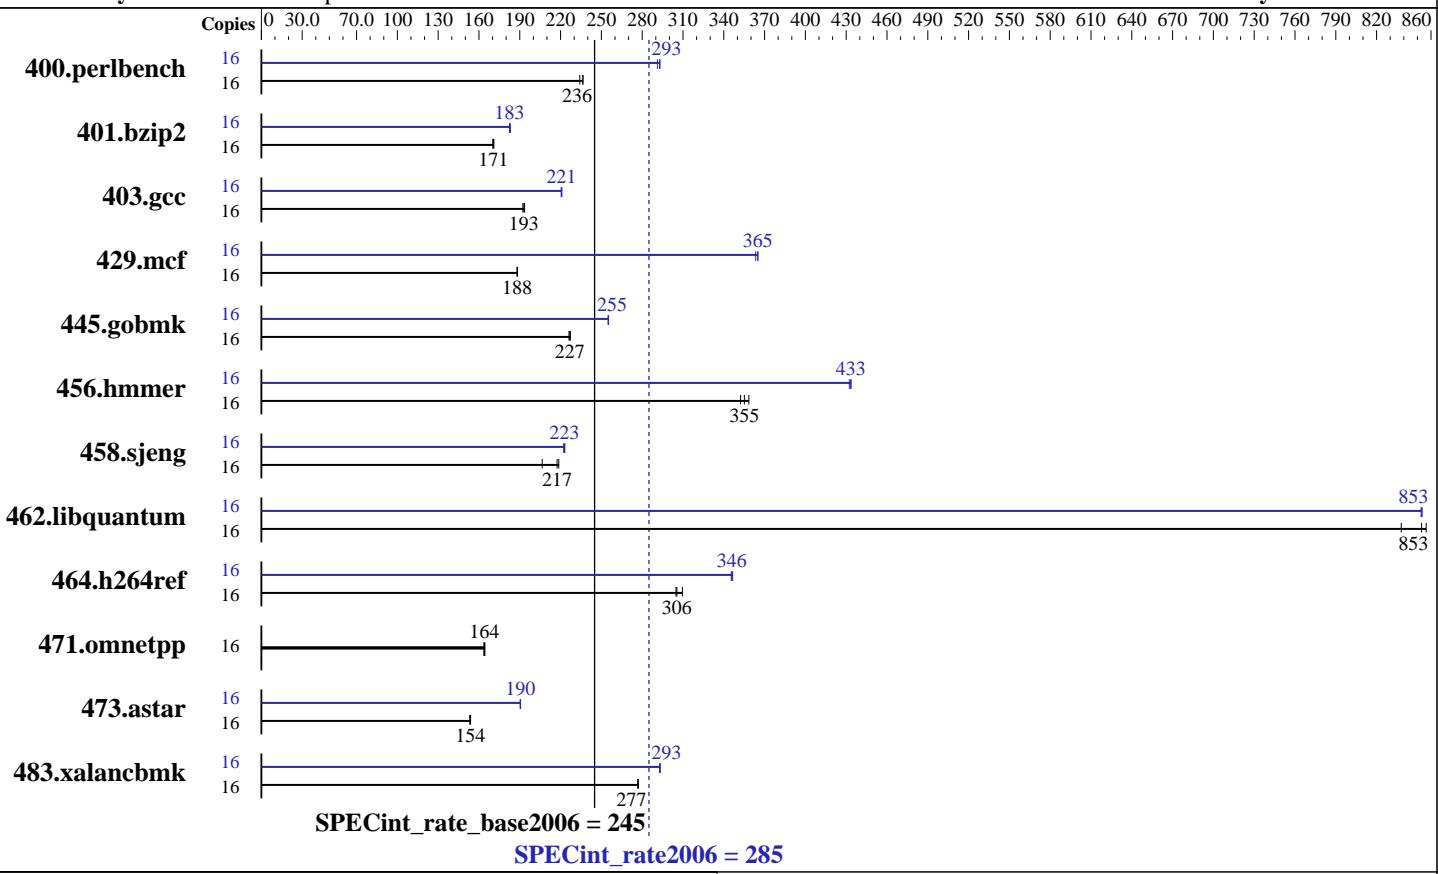

Hardware

CPU Name:	AMD Opteron 6134
CPU Characteristics:	
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip, 6 MB shared / 4 cores
Other Cache:	None
Memory:	64 GB (16 x 4 GB 2Rx8 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1
Compiler:	Kernel 2.6.32.12-0.7-default
Auto Parallel:	x86 Open64 4.2.4 Compiler Suite (from AMD)
File System:	No
System State:	ext3
Base Pointers:	Run level 3 (multiuser)
Peak Pointers:	32/64-bit
Other Software:	32/64-bit
	SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 285

Acer AW2000h-AW175h F1 (AMD Opteron 6134)

SPECint_rate_base2006 = 245

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Aug-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	661	236	668	234	661	236	16	537	291	533	293	534	293
401.bzip2	16	904	171	904	171	908	170	16	843	183	846	183	846	183
403.gcc	16	665	194	670	192	667	193	16	584	221	584	221	583	221
429.mcf	16	776	188	776	188	775	188	16	400	365	400	365	401	363
445.gobmk	16	742	226	739	227	740	227	16	658	255	658	255	658	255
456.hammer	16	420	355	416	358	424	352	16	344	434	345	432	344	433
458.sjeng	16	890	217	938	206	885	219	16	871	222	868	223	868	223
462.libquantum	16	389	853	396	838	387	856	16	388	853	389	853	389	853
464.h264ref	16	1161	305	1159	306	1144	310	16	1025	345	1024	346	1022	347
471.omnetpp	16	609	164	611	164	609	164	16	609	164	611	164	609	164
473.astar	16	730	154	730	154	733	153	16	590	190	590	190	589	191
483.xalancbmk	16	398	277	399	277	398	277	16	377	293	377	293	377	293

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18

This result was measured on the Gateway GW2000h-GW175h F1.

The Acer AW2000h-AW175h F1 and Gateway GW2000h-GW175h F1 are electronically equivalent.



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 285

Acer AW2000h-AW175h F1 (AMD Opteron 6134)

SPECint_rate_base2006 = 245

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Aug-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hmmr: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 285

Acer AW2000h-AW175h F1 (AMD Opteron 6134)

SPECint_rate_base2006 = 245

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Aug-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmr: -march=barcelona -mso -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
           -OPT:alias=disjoint -OPT:unroll_times_max=8
           -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
           -CG:local_sched_alg=1 -CG:cflow=0
           -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
           -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 285

Acer AW2000h-AW175h F1 (AMD Opteron 6134)

SPECint_rate_base2006 = 245

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Aug-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetch_nta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 285

Acer AW2000h-AW175h F1 (AMD Opteron 6134)

SPECint_rate_base2006 = 245

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Aug-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 20:10:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 May 2011.