



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®2006 = 37.6

BL465 (Intel Xeon E7520, 1.87 GHz)

SPECfp_base2006 = 37.3

CPU2006 license: 20


Test date: Apr-2011

Test sponsor: Bull SAS

Hardware Availability: Jan-2011

Tested by: Bull SAS

Software Availability: Apr-2011

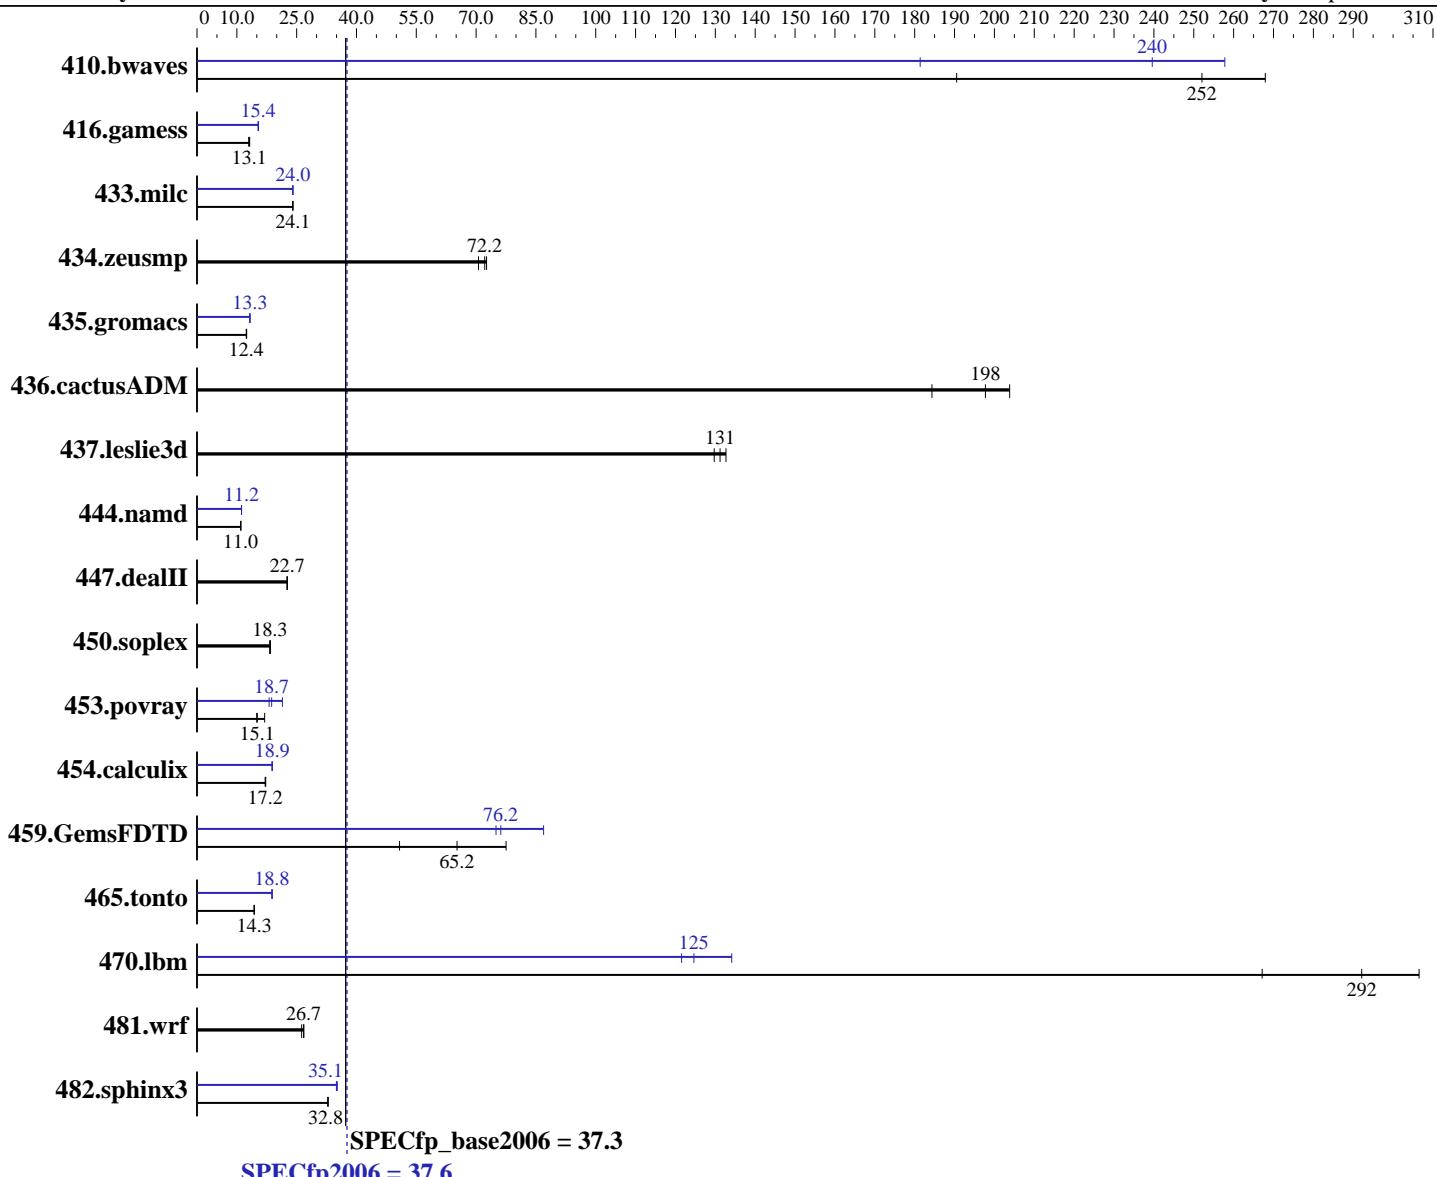

Hardware

CPU Name: Intel Xeon E7520
CPU Characteristics:
CPU MHz: 1866
FPU: Integrated
CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 37.6

BL465 (Intel Xeon E7520, 1.87 GHz)

SPECfp_base2006 = 37.3

CPU2006 license: 20

Test date: Apr-2011

Test sponsor: Bull SAS

Hardware Availability: Jan-2011

Tested by: Bull SAS

Software Availability: Apr-2011

L3 Cache: 18 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 4Rx8 PC3-8500R-7, ECC,
 running
 at 800 MHz)
 Disk Subsystem: 2 x 50 GB SATA, SSD
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	50.7	268	71.3	191	53.9	252	52.7	258	74.9	181	56.7	240
416.gamess	1482	13.2	1511	13.0	1492	13.1	1272	15.4	1269	15.4	1279	15.3
433.milc	382	24.1	383	24.0	382	24.1	382	24.1	382	24.0	382	24.0
434.zeusmp	129	70.6	126	72.2	125	72.6	129	70.6	126	72.2	125	72.6
435.gromacs	573	12.5	577	12.4	577	12.4	538	13.3	539	13.3	538	13.3
436.cactusADM	60.4	198	64.8	184	58.6	204	60.4	198	64.8	184	58.6	204
437.leslie3d	70.8	133	71.7	131	72.5	130	70.8	133	71.7	131	72.5	130
444.namd	731	11.0	730	11.0	731	11.0	718	11.2	718	11.2	718	11.2
447.dealII	505	22.7	507	22.6	505	22.7	505	22.7	507	22.6	505	22.7
450.soplex	455	18.3	457	18.3	454	18.4	455	18.3	457	18.3	454	18.4
453.povray	352	15.1	314	17.0	355	15.0	284	18.7	294	18.1	248	21.4
454.calculix	479	17.2	481	17.2	482	17.1	437	18.9	438	18.8	437	18.9
459.GemsFDTD	163	65.2	137	77.5	209	50.8	141	75.0	122	86.9	139	76.2
465.tonto	686	14.3	687	14.3	682	14.4	523	18.8	523	18.8	523	18.8
470.lbm	51.4	267	44.8	307	47.0	292	113	122	102	134	110	125
481.wrf	417	26.8	418	26.7	426	26.2	417	26.8	418	26.7	426	26.2
482.sphinx3	594	32.8	593	32.9	594	32.8	556	35.1	554	35.2	557	35.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run Hugepages was enabled with the following:

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

Power C-states enabled in BIOS
 Demand Scrub disabled in BIOS



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 37.6

BL465 (Intel Xeon E7520, 1.87 GHz)

SPECfp_base2006 = 37.3

CPU2006 license: 20

Test date: Apr-2011

Test sponsor: Bull SAS

Hardware Availability: Jan-2011

Tested by: Bull SAS

Software Availability: Apr-2011

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 37.6

BL465 (Intel Xeon E7520, 1.87 GHz)

SPECfp_base2006 = 37.3

CPU2006 license: 20

Test date: Apr-2011

Test sponsor: Bull SAS

Hardware Availability: Jan-2011

Tested by: Bull SAS

Software Availability: Apr-2011

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -parallel
-ansi-alias -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 37.6

BL465 (Intel Xeon E7520, 1.87 GHz)

SPECfp_base2006 = 37.3

CPU2006 license: 20

Test date: Apr-2011

Test sponsor: Bull SAS

Hardware Availability: Jan-2011

Tested by: Bull SAS

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
             -B /usr/share/libhugelbfs/ -Wl,-melf_x86_64 -Wl,-hugelbfs-link=BDT
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
             -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
                -inline-level=0 -opt-prefetch -parallel
                -B /usr/share/libhugelbfs/ -Wl,-melf_x86_64 -Wl,-hugelbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
            -opt-malloc-options=3 -auto -unroll4
            -B /usr/share/libhugelbfs/ -Wl,-melf_x86_64 -Wl,-hugelbfs-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
              -ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 37.6

BL465 (Intel Xeon E7520, 1.87 GHz)

SPECfp_base2006 = 37.3

CPU2006 license: 20

Test date: Apr-2011

Test sponsor: Bull SAS

Hardware Availability: Jan-2011

Tested by: Bull SAS

Software Availability: Apr-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 20:15:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 May 2011.