SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HX5 (Intel Xeon E7-2820)

SPECfp®_rate2006 = 270

SPECfp_rate_base2006 = 259

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

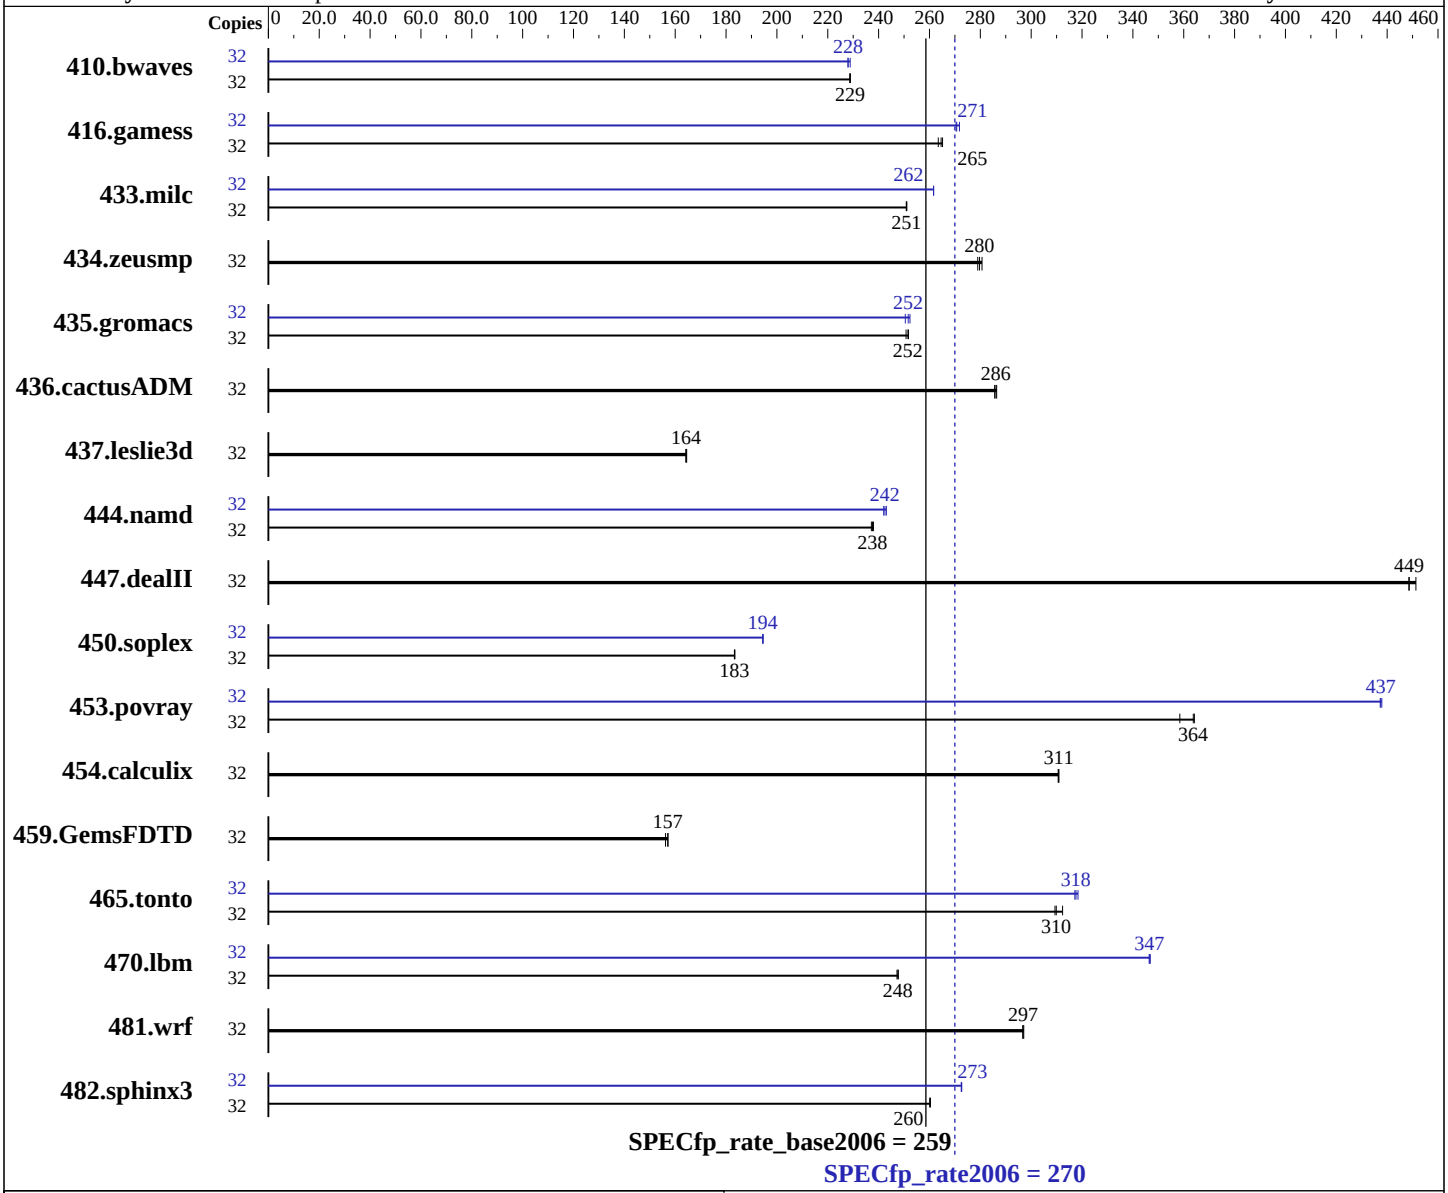

Hardware

CPU Name:	Intel Xeon E7-2820
CPU Characteristics:	Intel Turbo Boost Technology up to 2.27 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HX5 (Intel Xeon E7-2820)

SPECfp_rate2006 = 270

SPECfp_rate_base2006 = 259

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

L3 Cache: 18 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 4Rx8 PC3-8500R-7, ECC, running at 978 MHz)
Disk Subsystem: 2 x 50 GB SSD, RAID 0
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1902	229	1900	229	**1901**	**229**	32	1908	228	1901	229	**1907**	**228**
416.gamess	32	2363	265	2378	263	**2368**	**265**	32	2305	272	**2314**	**271**	2317	270
433.milc	32	1171	251	1170	251	**1170**	**251**	32	**1123**	**262**	1123	262	1123	262
434.zeusmp	32	1038	281	**1041**	**280**	1044	279	32	1038	281	**1041**	**280**	1044	279
435.gromacs	32	911	251	**908**	**252**	908	252	32	912	250	905	252	**908**	**252**
436.cactusADM	32	**1336**	**286**	1335	286	1339	286	32	**1336**	**286**	1335	286	1339	286
437.leslie3d	32	**1831**	**164**	1832	164	1828	165	32	**1831**	**164**	1832	164	1828	165
444.namd	32	1079	238	**1080**	**238**	1082	237	32	1056	243	1061	242	**1058**	**242**
447.dealII	32	816	449	811	451	**816**	**449**	32	816	449	811	451	**816**	**449**
450.soplex	32	1456	183	**1455**	**183**	1455	183	32	1372	195	1373	194	**1372**	**194**
453.povray	32	475	358	467	364	**468**	**364**	32	**389**	**437**	389	438	389	437
454.calculix	32	850	311	**849**	**311**	849	311	32	850	311	**849**	**311**	849	311
459.GemsFDTD	32	2160	157	**2162**	**157**	2174	156	32	2160	157	**2162**	**157**	2174	156
465.tonto	32	**1016**	**310**	1018	309	1008	312	32	**991**	**318**	993	317	989	318
470.lbm	32	**1776**	**248**	1775	248	1778	247	32	1269	346	**1269**	**347**	1268	347
481.wrf	32	1205	297	1203	297	**1204**	**297**	32	1205	297	1203	297	**1204**	**297**
482.sphinx3	32	2398	260	2396	260	**2396**	**260**	32	2289	272	**2288**	**273**	2287	273

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 1 > /proc/sys/vm/zone_reclaim_mode
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 14400 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
BIOS Settings:
Turbo Boost Power Optimization set to Traditional
```

General Notes

```
Binaries were compiled on RHEL5.5
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch` `-static -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:19:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 May 2011.