SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R910 (Intel Xeon X7542, 2.67 GHz)

SPECfp®_rate2006 = 234

SPECfp_rate_base2006 = 216

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

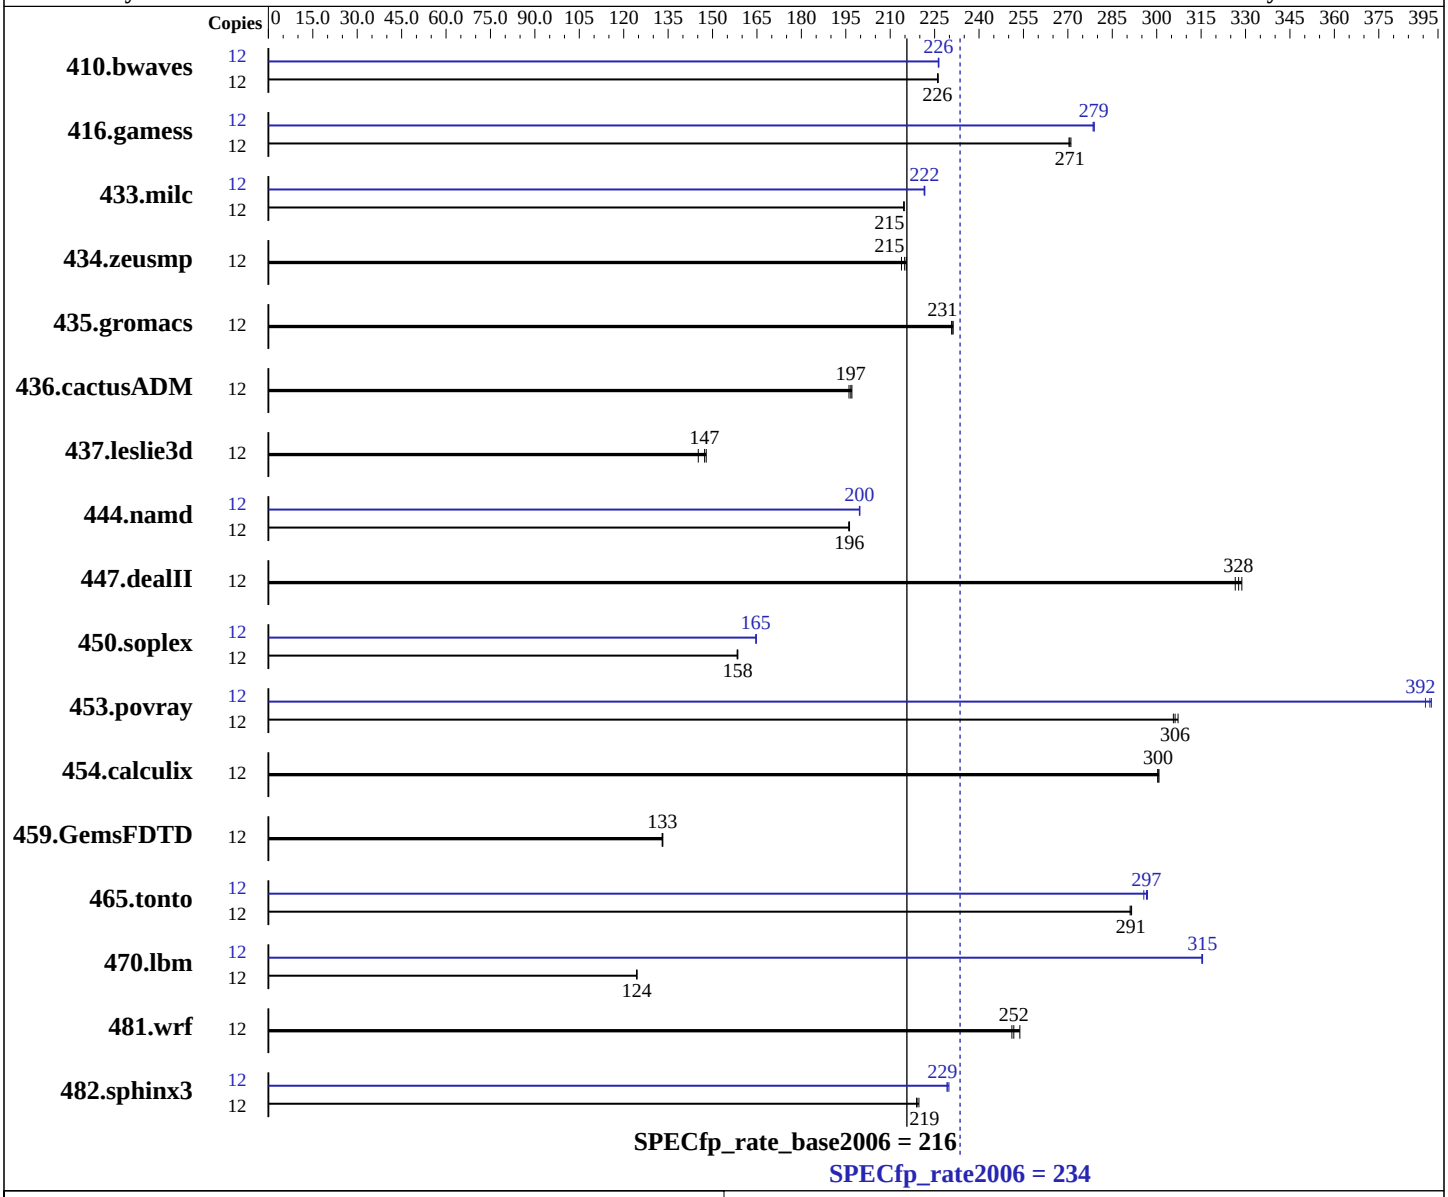

Hardware

CPU Name:	Intel Xeon X7542
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R910 (Intel Xeon X7542, 2.67 GHz)

SPECfp_rate2006 = 234

SPECfp_rate_base2006 = 216

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

L3 Cache: 18 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (32 x 8 GB 4Rx8 PC3-8500R-7, ECC, running at 978 MHz)
Disk Subsystem: 1 x 500 GB 7200 RPM SAS 6Gb
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	721	226	722	226	**722**	**226**	12	720	226	721	226	**720**	**226**
416.gamess	12	867	271	**868**	**271**	869	270	12	842	279	**843**	**279**	844	279
433.milc	12	**513**	**215**	513	215	513	215	12	497	222	497	221	**497**	**222**
434.zeusmp	12	507	215	511	214	**508**	**215**	12	507	215	511	214	**508**	**215**
435.gromacs	12	370	231	**371**	**231**	371	231	12	370	231	**371**	**231**	371	231
436.cactusADM	12	**729**	**197**	728	197	731	196	12	**729**	**197**	728	197	731	196
437.leslie3d	12	777	145	763	148	**766**	**147**	12	777	145	763	148	**766**	**147**
444.namd	12	**490**	**196**	490	196	491	196	12	**482**	**200**	482	200	482	200
447.dealII	12	**419**	**328**	418	329	420	327	12	**419**	**328**	418	329	420	327
450.soplex	12	632	158	**631**	**158**	631	159	12	608	165	607	165	**608**	**165**
453.povray	12	209	306	208	307	**208**	**306**	12	**163**	**392**	163	391	163	393
454.calculix	12	329	301	**329**	**300**	330	300	12	329	301	**329**	**300**	330	300
459.GemsFDTD	12	957	133	956	133	**956**	**133**	12	957	133	956	133	**956**	**133**
465.tonto	12	406	291	**405**	**291**	405	292	12	399	296	398	297	**398**	**297**
470.lbm	12	1325	124	1326	124	**1325**	**124**	12	523	315	**523**	**315**	523	315
481.wrf	12	528	254	**532**	**252**	534	251	12	528	254	**532**	**252**	534	251
482.sphinx3	12	1065	220	**1068**	**219**	1068	219	12	**1019**	**229**	1018	230	1021	229

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
```

General Notes

```
The Dell PowerEdge R910 and
the Bull NovaScale R480 F2 models are electronically equivalent.
The results have been measured on a Dell PowerEdge R910 model.
Binaries were compiled on RHEL5.5
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto -inline-calloc -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:39:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 May 2011.