SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECfp®_rate2006 = 124

SPECfp_rate_base2006 = 121

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

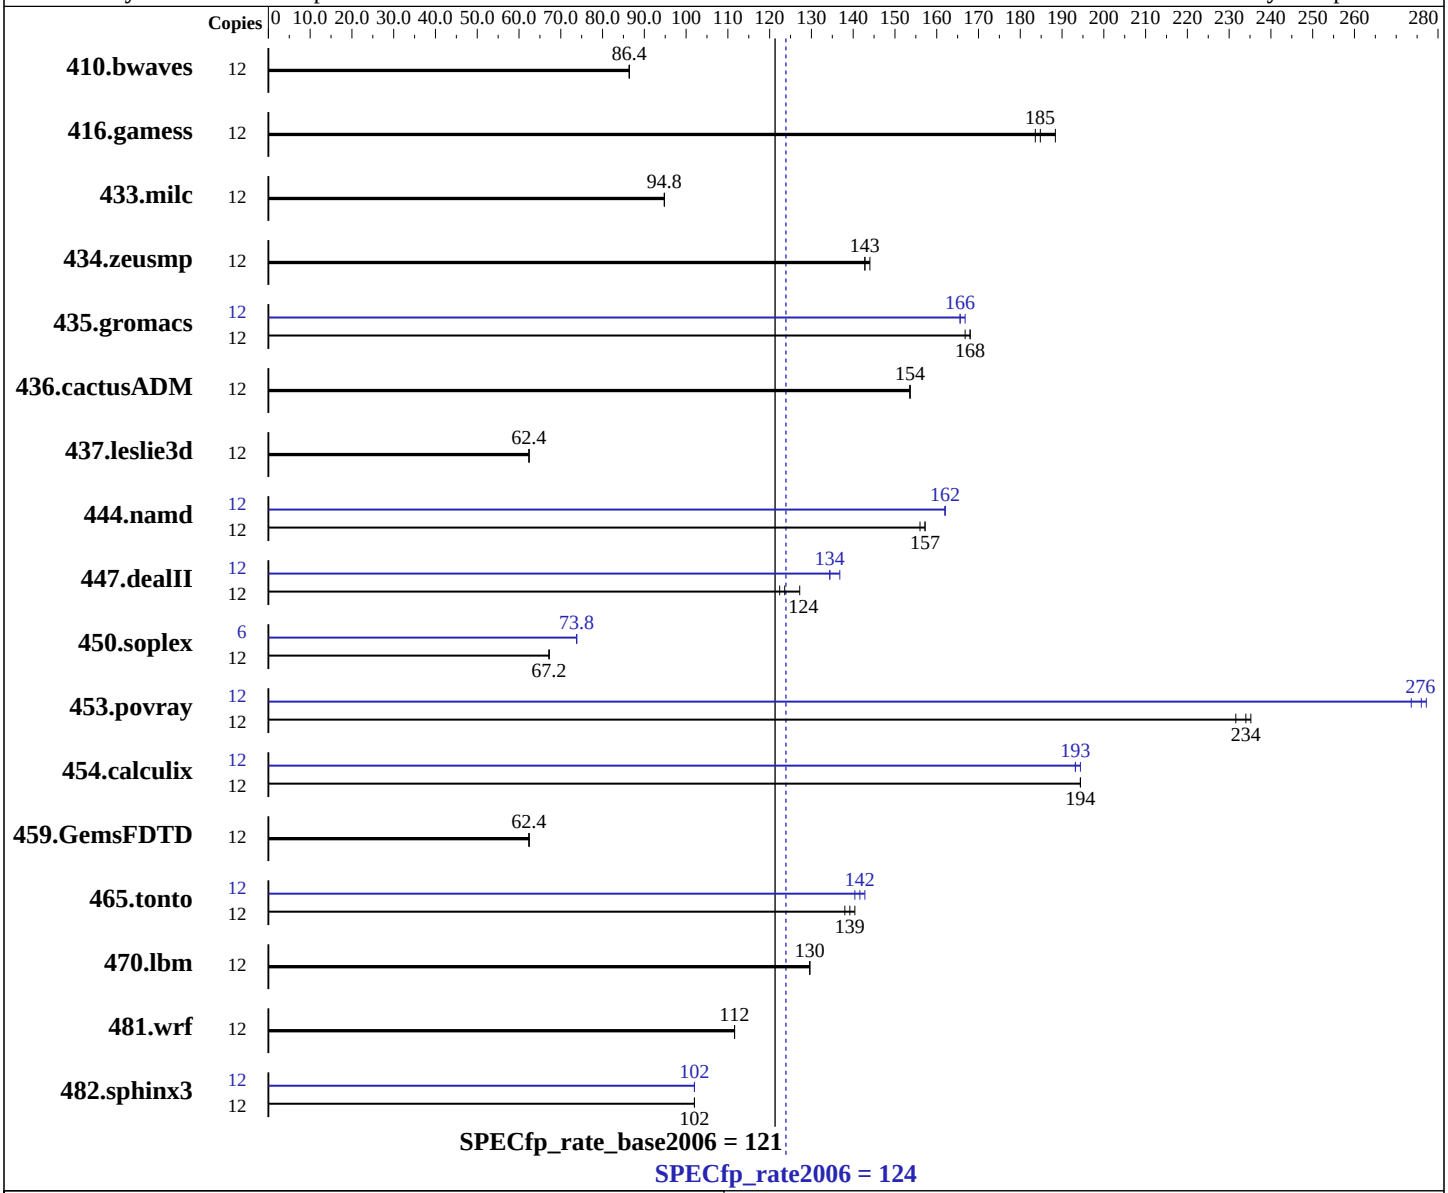

Hardware

CPU Name:	Intel Core i7-990X
CPU Characteristics:	Intel Turbo Boost Technology up to 3.73 GHz
CPU MHz:	3466
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler XE for Intel 64 Version 12.0.3.176 Build 20110309 Intel Visual Fortran Compiler XE for Intel 64 Version 12.0.3.176 Build 20110309 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	No
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECfp_rate2006 = 124

SPECfp_rate_base2006 = 121

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 12 GB (3 x 4 GB 2Rx8 PC3-8600U-9)
Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
Other Hardware: None

System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 9.01 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1895	86.4	**1884**	**86.4**	1883	86.4	12	1895	86.4	**1884**	**86.4**	1883	86.4
416.gamess	12	1280	184	**1273**	**185**	1248	188	12	1280	184	**1273**	**185**	1248	188
433.milc	12	**1155**	**94.8**	1155	94.8	1156	94.8	12	**1155**	**94.8**	1155	94.8	1156	94.8
434.zeusmp	12	762	143	**762**	**143**	761	144	12	762	143	**762**	**143**	761	144
435.gromacs	12	513	167	509	168	**511**	**168**	12	**516**	**166**	516	166	513	167
436.cactusADM	12	932	154	931	154	**931**	**154**	12	932	154	931	154	**931**	**154**
437.leslie3d	12	**1797**	**62.4**	1800	62.4	1796	62.4	12	**1797**	**62.4**	1800	62.4	1796	62.4
444.namd	12	**612**	**157**	612	157	619	156	12	594	162	594	162	**594**	**162**
447.dealII	12	1078	127	1122	122	**1109**	**124**	12	1006	137	**1020**	**134**	1021	134
450.soplex	12	1486	67.2	1489	67.2	**1486**	**67.2**	6	**678**	**73.8**	681	73.8	676	73.8
453.povray	12	276	232	**273**	**234**	271	235	12	234	274	230	277	**232**	**276**
454.calculix	12	508	194	**509**	**194**	510	194	12	**511**	**193**	509	194	512	193
459.GemsFDTD	12	2057	62.4	**2059**	**62.4**	2059	62.4	12	2057	62.4	**2059**	**62.4**	2059	62.4
465.tonto	12	855	138	842	140	**851**	**139**	12	824	143	841	140	**833**	**142**
470.lbm	12	1276	130	**1277**	**130**	1278	130	12	1276	130	**1277**	**130**	1278	130
481.wrf	12	1200	112	1195	112	**1197**	**112**	12	1200	112	1195	112	**1197**	**112**
482.sphinx3	12	2300	102	2298	102	**2299**	**102**	12	2301	102	2297	102	**2300**	**102**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 The start command with the /affinity switch was used to bind processes to cores
```

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
System was configured with an ATI HD5770 discrete graphics card
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qstd=c99 ifort
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_P64 -names:lowercase
    416.gamess: -DSPEC_CPU_P64
      433.milc: -DSPEC_CPU_P64
    434.zeusmp: -DSPEC_CPU_P64
    435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
    437.leslie3d: -DSPEC_CPU_P64
      444.namd: -DSPEC_CPU_P64 /TP
     447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
     450.soplex: -DSPEC_CPU_P64
     453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
    454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
      465.tonto: -DSPEC_CPU_P64
       470.lbm: -DSPEC_CPU_P64
       481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
    482.sphinx3: -DSPEC_CPU_P64
```

Base Optimization Flags

C benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F1000000000            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qcxx-features
-Qauto-ilp32 /F1000000000 shlW64M.lib            -link /FORCE:MULTIPLE
```

Fortran benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias /F1000000000
           -link /FORCE:MULTIPLE
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qscalar-rep- -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

436.cactusADM: basepeak = yes

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.20110808.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.20110808.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:09:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.