SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Fire X4470 M2 (Intel Xeon E7-4870 2.40 GHz)

SPECfp®_rate2006 = 738

SPECfp_rate_base2006 = 709

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Jun-2011
Hardware Availability: Jun-2011
Software Availability: Aug-2011

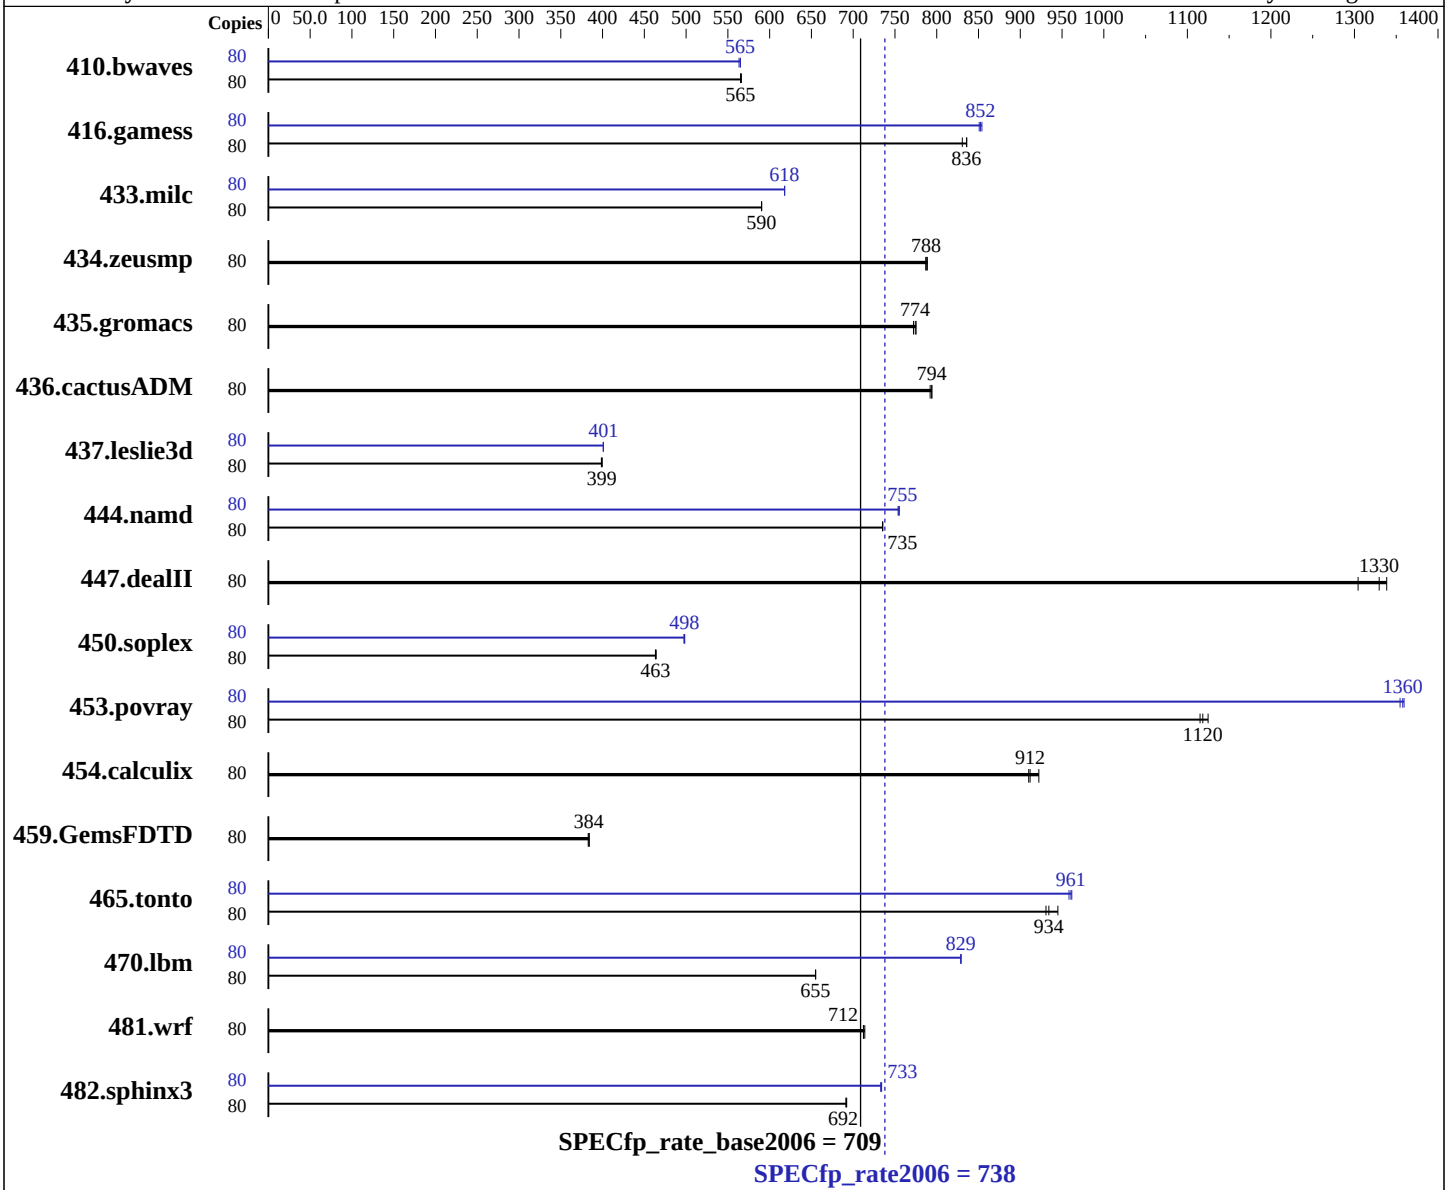

Hardware

CPU Name:	Intel Xeon E7-4870
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Oracle Linux 6 kernel 2.6.32-100.28.5.el6.x86_64
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Fire X4470 M2 (Intel Xeon E7-4870 2.40 GHz)

SPECfp_rate2006 = 738

SPECfp_rate_base2006 = 709

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Jun-2011
Hardware Availability: Jun-2011
Software Availability: Aug-2011

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (64 x 8 GB 2Rx8 PC3L-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem: 1 x 500 GB, SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1920	566	**1923**	**565**	1923	565	80	1924	565	**1925**	**565**	1930	563
416.gamess	80	1874	836	**1874**	**836**	1886	831	80	1841	851	**1838**	**852**	1834	854
433.milc	80	1244	590	1244	590	**1244**	**590**	80	1188	618	1189	618	**1189**	**618**
434.zeusmp	80	923	789	925	787	**924**	**788**	80	923	789	925	787	**924**	**788**
435.gromacs	80	**738**	**774**	737	775	740	772	80	**738**	**774**	737	775	740	772
436.cactusADM	80	1204	794	**1204**	**794**	1207	792	80	1204	794	**1204**	**794**	1207	792
437.leslie3d	80	1882	400	**1884**	**399**	1887	399	80	1875	401	1877	401	**1875**	**401**
444.namd	80	873	735	872	736	**873**	**735**	80	851	754	850	755	**850**	**755**
447.dealII	80	**688**	**1330**	702	1300	684	1340	80	**688**	**1330**	702	1300	684	1340
450.soplex	80	**1440**	**463**	1440	463	1437	464	80	1339	498	1341	497	**1340**	**498**
453.povray	80	**381**	**1120**	382	1120	378	1120	80	314	1350	313	1360	**313**	**1360**
454.calculix	80	716	922	725	910	**724**	**912**	80	716	922	725	910	**724**	**912**
459.GemsFDTD	80	2217	383	**2213**	**384**	2210	384	80	2217	383	**2213**	**384**	2210	384
465.tonto	80	833	945	**843**	**934**	846	931	80	821	958	**819**	**961**	819	962
470.lbm	80	1678	655	**1678**	**655**	1678	655	80	1326	829	**1326**	**829**	1326	829
481.wrf	80	1255	712	**1254**	**712**	1252	714	80	1255	712	**1254**	**712**	1252	714
482.sphinx3	80	2252	692	2255	691	**2255**	**692**	80	2124	734	2127	733	**2126**	**733**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 Hugepages was enabled with the following:
   'nodev   /mnt/hugepages   hugetlbfs  defaults   0 0' added to /etc/fstab
    echo 36000 > /proc/sys/vm/nr_hugepages
    export HUGETLB_MORECORE=yes
    export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
Default BIOS Settings were used.
```

General Notes

```
Binaries were compiled on RHEL5.5
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20110808.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20110808.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 23:57:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.