SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T710 (Intel Xeon E5607, 2.26 GHz)

SPECfp®_rate2006 = 138

SPECfp_rate_base2006 = 131

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

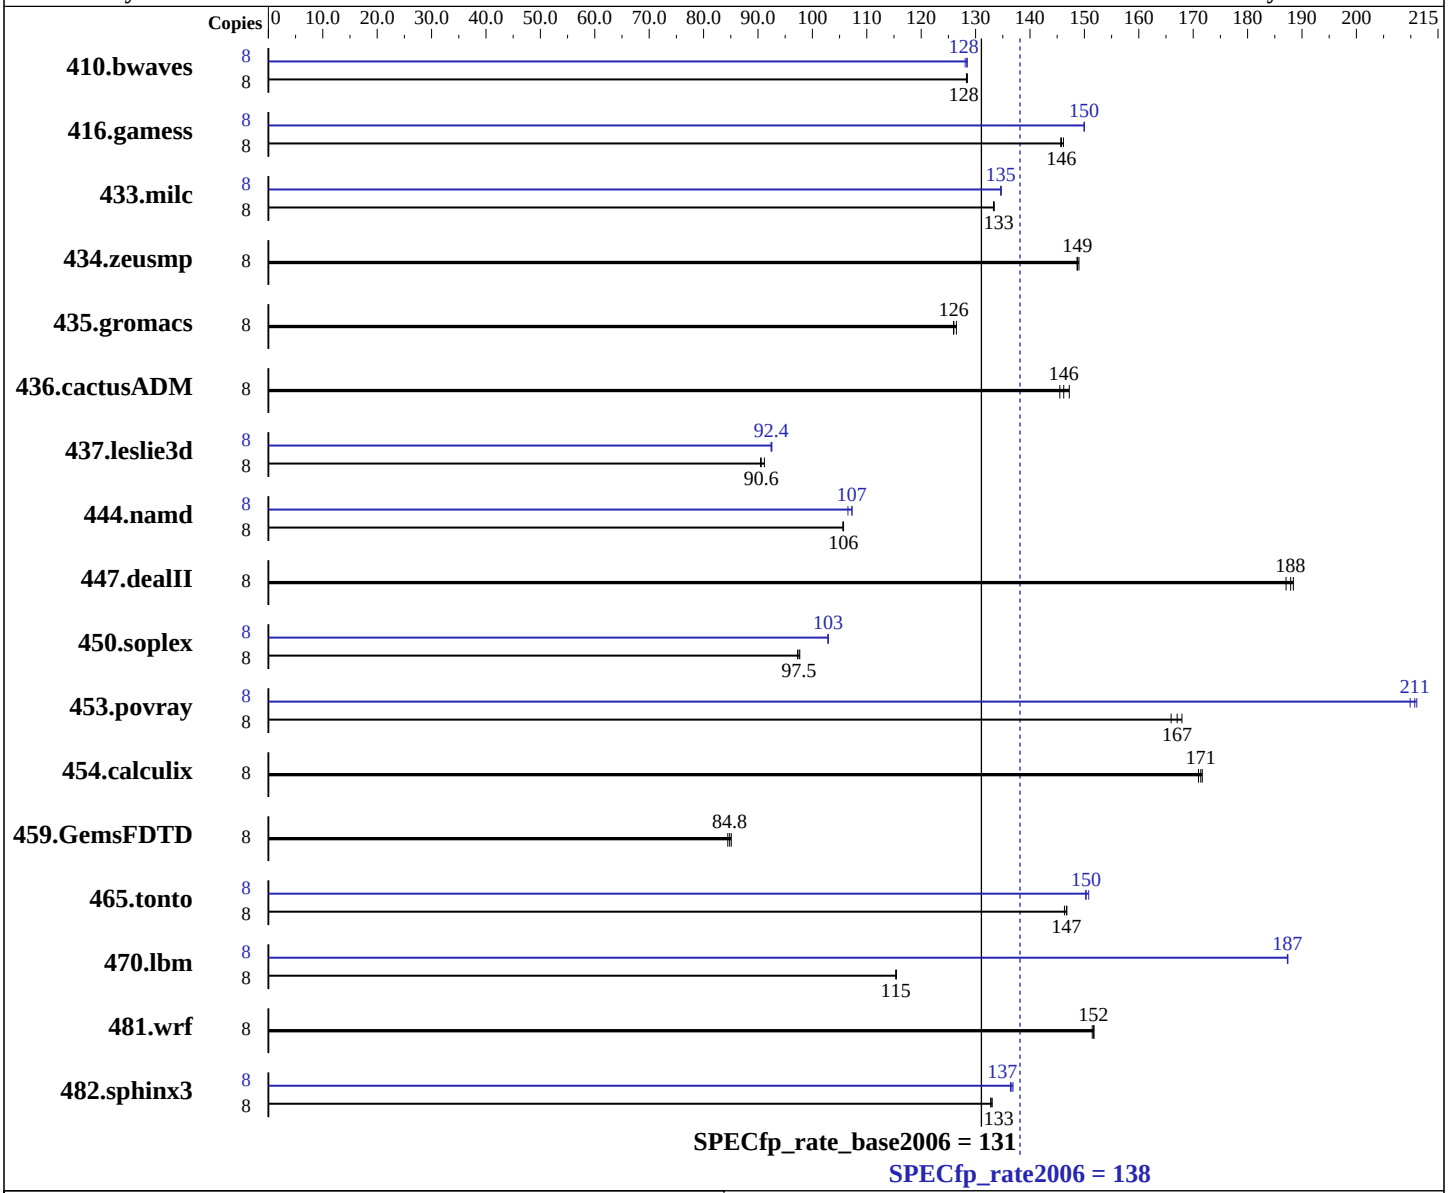

Hardware

CPU Name:	Intel Xeon E5607
CPU Characteristics:	
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T710 (Intel Xeon E5607, 2.26 GHz)

SPECfp_rate2006 = 138

SPECfp_rate_base2006 = 131

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem: 1 x 146 GB 15000 RPM SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	846	128	847	128	**847**	**128**	8	**847**	**128**	849	128	846	128
416.gamess	8	**1074**	**146**	1072	146	1075	146	8	1045	150	**1044**	**150**	1044	150
433.milc	8	550	133	551	133	**551**	**133**	8	545	135	**545**	**135**	546	135
434.zeusmp	8	**489**	**149**	489	149	490	149	8	**489**	**149**	489	149	490	149
435.gromacs	8	452	126	454	126	**453**	**126**	8	452	126	454	126	**453**	**126**
436.cactusADM	8	**654**	**146**	657	145	649	147	8	**654**	**146**	657	145	649	147
437.leslie3d	8	825	91.2	831	90.5	**830**	**90.6**	8	**814**	**92.4**	812	92.6	814	92.4
444.namd	8	608	106	**607**	**106**	607	106	8	602	107	**598**	**107**	598	107
447.dealII	8	489	187	486	188	**487**	**188**	8	489	187	486	188	**487**	**188**
450.soplex	8	**684**	**97.5**	683	97.7	686	97.3	8	**648**	**103**	648	103	649	103
453.povray	8	**255**	**167**	253	168	256	166	8	**202**	**211**	202	211	203	210
454.calculix	8	384	172	386	171	**385**	**171**	8	384	172	386	171	**385**	**171**
459.GemsFDTD	8	998	85.1	**1001**	**84.8**	1005	84.4	8	998	85.1	**1001**	**84.8**	1005	84.4
465.tonto	8	**537**	**147**	538	146	536	147	8	522	151	524	150	**524**	**150**
470.lbm	8	952	115	953	115	**953**	**115**	8	**587**	**187**	587	187	587	187
481.wrf	8	589	152	590	151	**589**	**152**	8	589	152	590	151	**589**	**152**
482.sphinx3	8	**1174**	**133**	1174	133	1172	133	8	**1141**	**137**	1143	136	1139	137

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 3600 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Data Reuse = Disabled (Default = Enabled)
```

General Notes

```
Binaries were compiled on RHEL5.5
The Dell PowerEdge T710 and
the Bull NovaScale T860 F2 models are electronically equivalent.
The results have been measured on a Dell PowerEdge T710 model
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
   435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
   437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
   454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
       470.lbm: -DSPEC_CPU_LP64
       481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto -inline-calloc -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 23:22:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 August 2011.