SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH57JG Motherboard (Intel Core i5-650)

SPECfp®_rate2006 = 53.3

SPECfp_rate_base2006 = 53.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2011
Hardware Availability: Jan-2010
Software Availability: Apr-2011

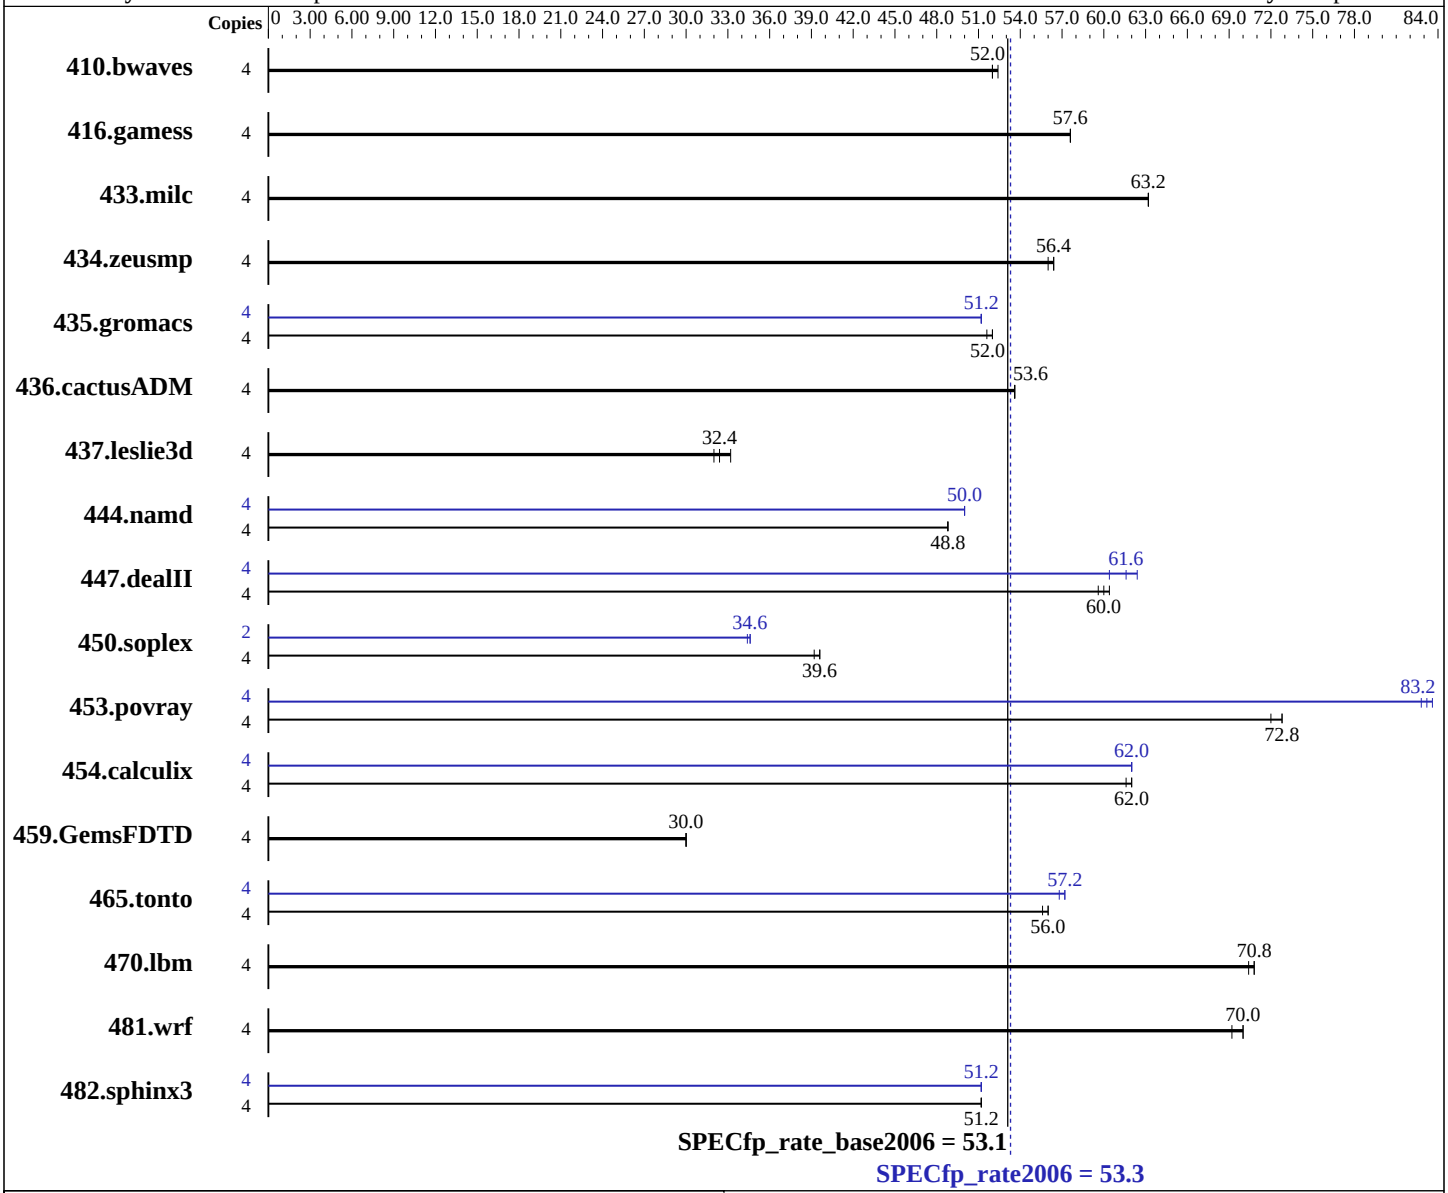

Hardware

CPU Name:	Intel Core i5-650
CPU Characteristics:	Intel Turbo Boost Technology up to 3.46 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler XE for Intel 64 Version 12.0.3.176 Build 20110309 Intel Visual Fortran Compiler XE for Intel 64 Version 12.0.3.176 Build 20110309 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	No
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH57JG Motherboard (Intel Core i5-650)

SPECfp_rate2006 = 53.3

SPECfp_rate_base2006 = 53.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2011
Hardware Availability: Jan-2010
Software Availability: Apr-2011

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (2 x 2 GB 2Rx8 PC3-10600U-9)
Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
Other Hardware: None

System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 9.01 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1045	52.0	1035	52.4	**1042**	**52.0**	4	1045	52.0	1035	52.4	**1042**	**52.0**
416.gamess	4	1362	57.6	**1361**	**57.6**	1361	57.6	4	1362	57.6	**1361**	**57.6**	1361	57.6
433.milc	4	581	63.2	580	63.2	**580**	**63.2**	4	581	63.2	580	63.2	**580**	**63.2**
434.zeusmp	4	649	56.0	644	56.4	**645**	**56.4**	4	649	56.0	644	56.4	**645**	**56.4**
435.gromacs	4	**550**	**52.0**	553	51.6	548	52.0	4	**557**	**51.2**	559	51.2	556	51.2
436.cactusADM	4	890	53.6	**893**	**53.6**	894	53.6	4	890	53.6	**893**	**53.6**	894	53.6
437.leslie3d	4	1139	33.2	1171	32.0	**1155**	**32.4**	4	1139	33.2	1171	32.0	**1155**	**32.4**
444.namd	4	**659**	**48.8**	659	48.8	659	48.8	4	639	50.0	**639**	**50.0**	639	50.0
447.dealII	4	756	60.4	**764**	**60.0**	769	59.6	4	756	60.4	733	62.4	**743**	**61.6**
450.soplex	4	846	39.6	849	39.2	**846**	**39.6**	2	481	34.6	**483**	**34.6**	484	34.4
453.povray	4	296	72.0	292	72.8	**293**	**72.8**	4	255	83.6	**255**	**83.2**	258	82.8
454.calculix	4	**533**	**62.0**	535	61.6	533	62.0	4	**533**	**62.0**	534	62.0	533	62.0
459.GemsFDTD	4	1409	30.0	1417	30.0	**1417**	**30.0**	4	1409	30.0	1417	30.0	**1417**	**30.0**
465.tonto	4	**705**	**56.0**	706	55.6	703	56.0	4	**690**	**57.2**	689	57.2	692	56.8
470.lbm	4	779	70.4	778	70.8	**778**	**70.8**	4	779	70.4	778	70.8	**778**	**70.8**
481.wrf	4	645	69.2	639	70.0	**640**	**70.0**	4	645	69.2	639	70.0	**640**	**70.0**
482.sphinx3	4	1523	51.2	1526	51.2	**1523**	**51.2**	4	**1517**	**51.2**	1518	51.2	1517	51.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 The start command with the /affinity switch was used to bind processes to cores
```

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qcxx-features
-Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qstd=c99 ifort
```

Peak Portability Flags

```
Same as Base Portability Flags
```

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE`

C++ benchmarks:

444.namd: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

447.dealII: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qscalar-rep- -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

450.soplex: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

453.povray: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

436.cactusADM: basepeak = yes

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.html
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.xml
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:09:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 August 2011.