SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei XH620,Intel Xeon X5670

SPECfp®_rate2006 = 262

SPECfp_rate_base2006 = 255

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

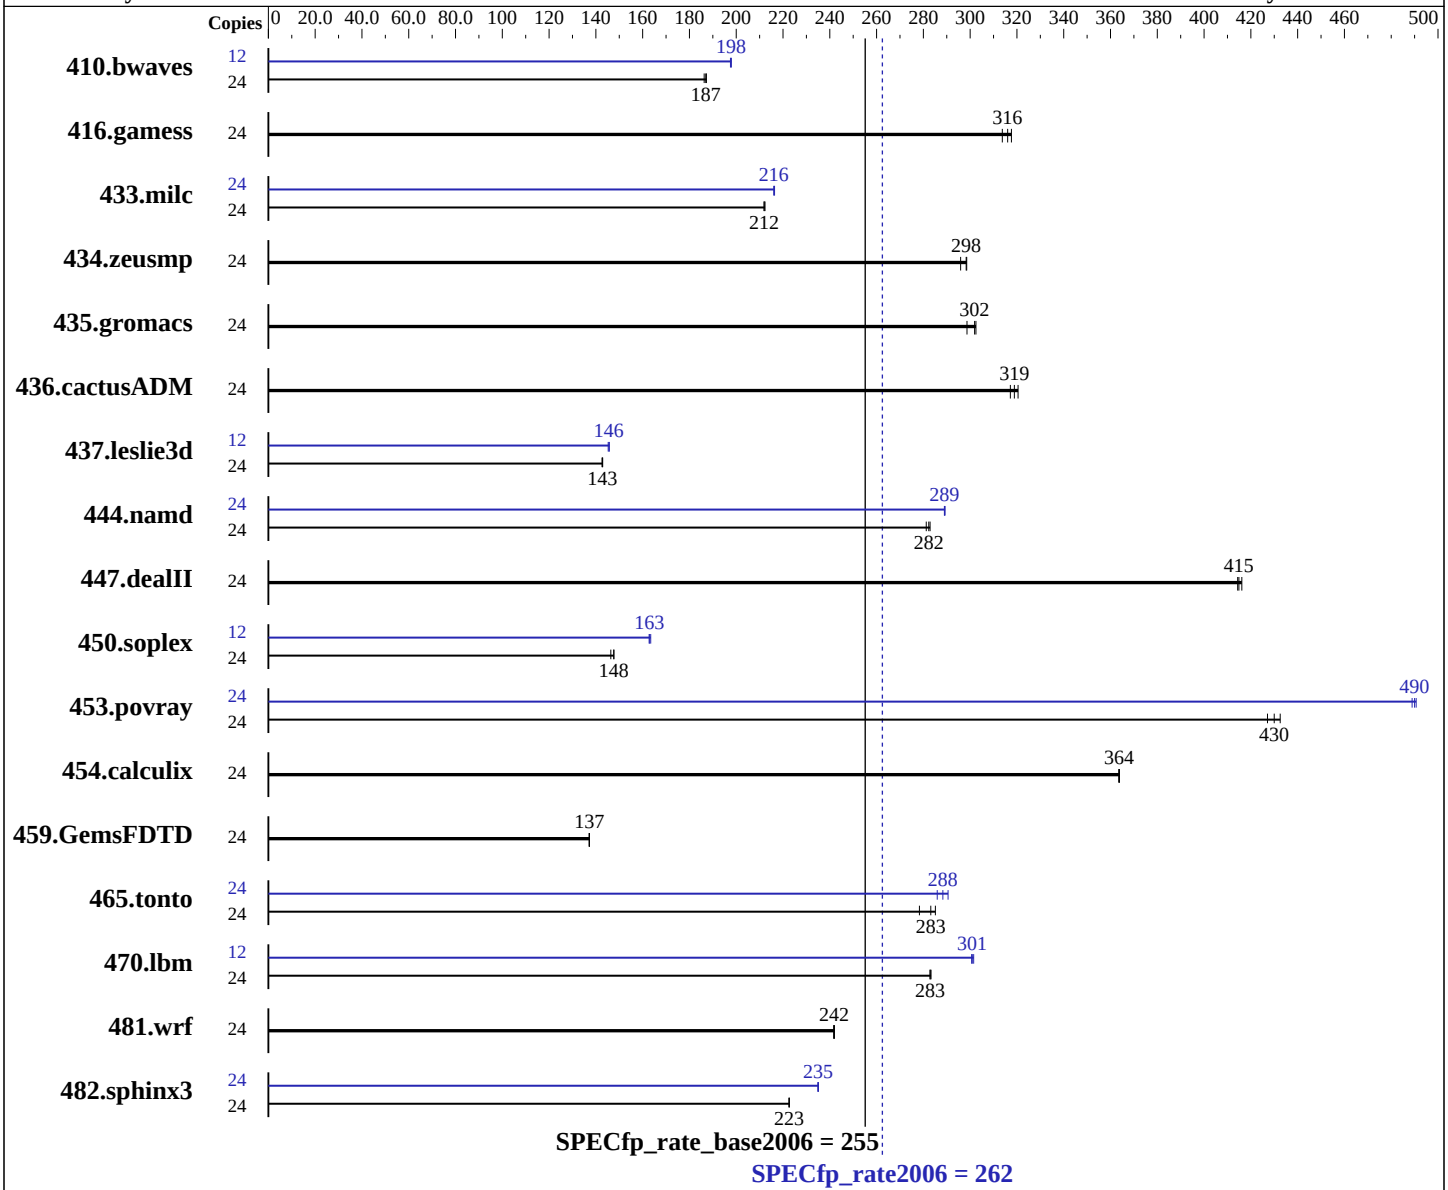

Hardware

CPU Name:	Intel Xeon X5670
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	C++: Version 12.0.1.116 of Intel 64 Compiler XE Build 20101116; Fortran: Version 12.0.1.116 of Intel 64 Compiler XE Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei XH620,Intel Xeon X5670

SPECfp_rate2006 = 262

SPECfp_rate_base2006 = 255

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 300 GB SAS, 15K RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1742	187	1751	186	**1744**	**187**	12	824	198	**824**	**198**	826	198
416.gamess	24	1479	318	**1487**	**316**	1498	314	24	1479	318	**1487**	**316**	1498	314
433.milc	24	**1039**	**212**	1038	212	1040	212	24	**1019**	**216**	1018	216	1019	216
434.zeusmp	24	**732**	**298**	738	296	732	299	24	**732**	**298**	738	296	732	299
435.gromacs	24	574	299	**568**	**302**	567	302	24	574	299	**568**	**302**	567	302
436.cactusADM	24	904	317	895	320	**899**	**319**	24	904	317	895	320	**899**	**319**
437.leslie3d	24	1582	143	**1579**	**143**	1579	143	12	777	145	**775**	**146**	774	146
444.namd	24	680	283	684	281	**682**	**282**	24	665	289	666	289	**666**	**289**
447.dealII	24	663	414	**662**	**415**	660	416	24	663	414	**662**	**415**	660	416
450.soplex	24	1355	148	1367	146	**1356**	**148**	12	615	163	**614**	**163**	612	163
453.povray	24	299	427	295	433	**297**	**430**	24	**261**	**490**	260	491	261	489
454.calculix	24	544	364	**544**	**364**	545	364	24	544	364	**544**	**364**	545	364
459.GemsFDTD	24	1855	137	**1855**	**137**	1857	137	24	1855	137	**1855**	**137**	1857	137
465.tonto	24	828	285	**834**	**283**	849	278	24	**819**	**288**	826	286	813	291
470.lbm	24	1164	283	1166	283	**1165**	**283**	12	547	302	548	301	**548**	**301**
481.wrf	24	**1109**	**242**	1109	242	1108	242	24	**1109**	**242**	1109	242	1108	242
482.sphinx3	24	2101	223	2101	223	**2101**	**223**	24	1989	235	1991	235	**1990**	**235**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 1 >/proc/sys/vm/zone_reclaim_mode
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

Data Reuse Optimization disabled in BIOS Setup.

General Notes

Binaries compiled on RHEL 5.5

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revC.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revC.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:47:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 October 2011.