SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.40 GHz, Intel Xeon E7-4870)

SPECfp®_rate2006 = 736

SPECfp_rate_base2006 = 720

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Apr-2011
Software Availability: Aug-2011

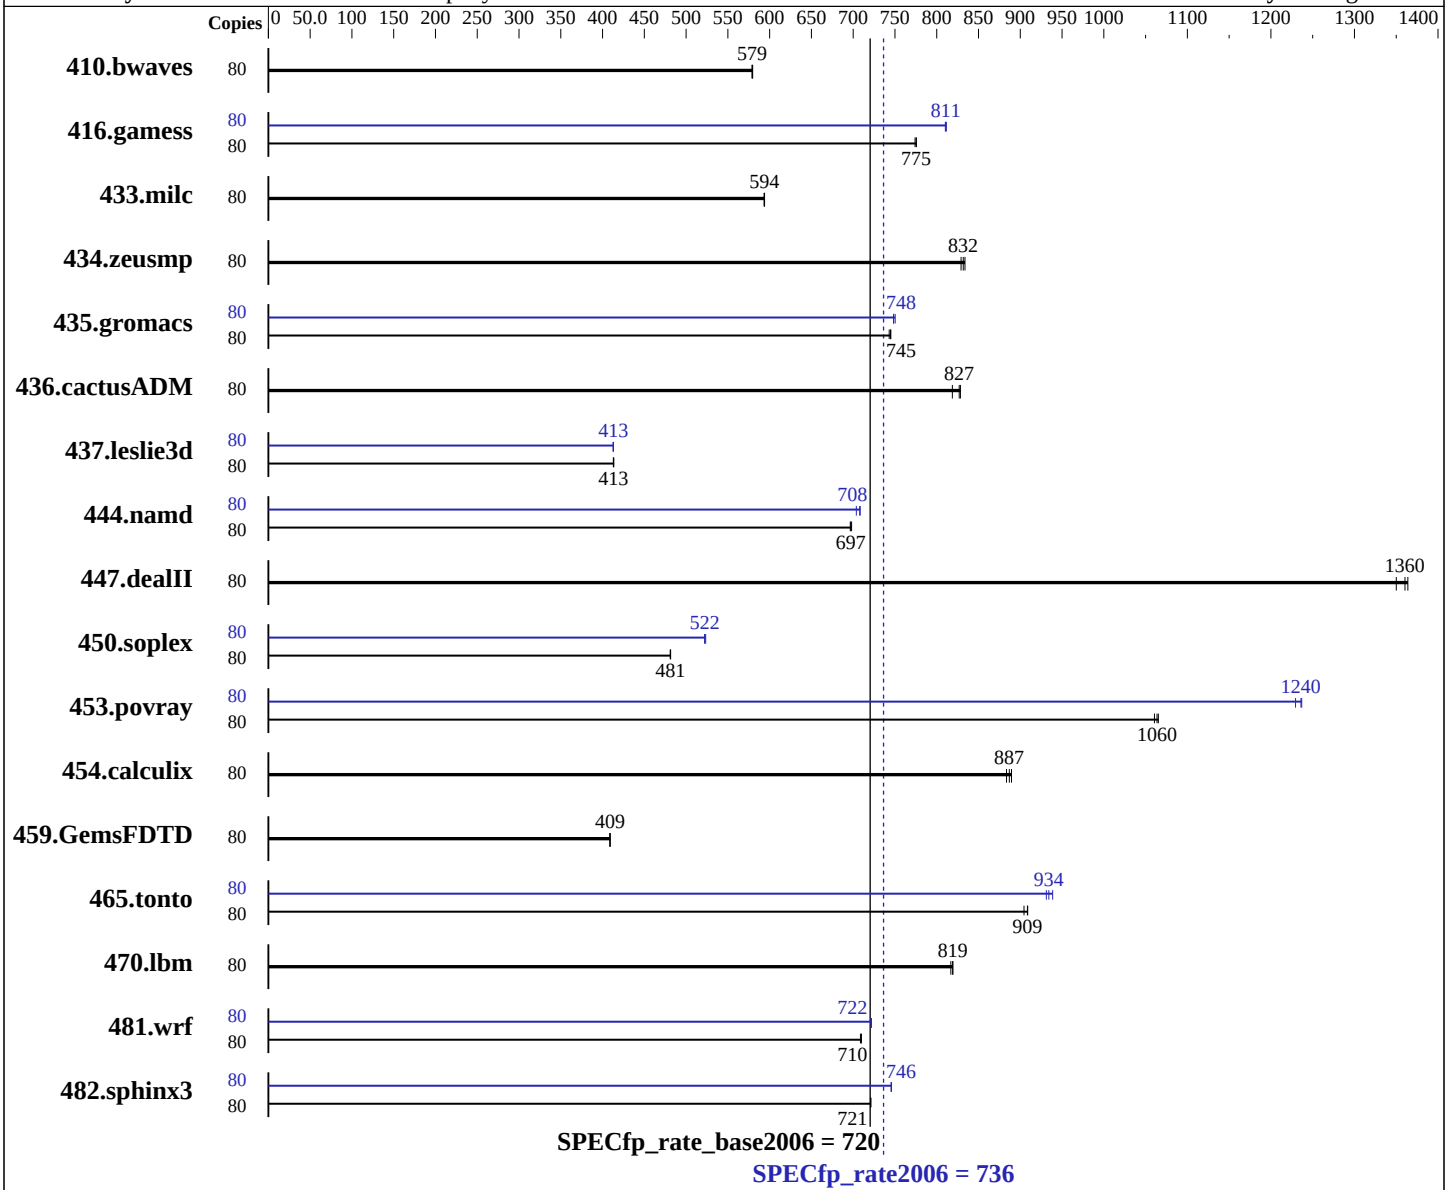

Hardware

CPU Name:	Intel Xeon E7-4870
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++/Fortran: Version 12.1.0.225 of Intel Compiler XE Build 20110803
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.40 GHz, Intel Xeon E7-4870)

SPECfp_rate2006 = 736

SPECfp_rate_base2006 = 720

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Apr-2011
Software Availability: Aug-2011

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (64 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 2 x 146 GB 10 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1876	580	**1877**	**579**	1878	579	80	1876	580	**1877**	**579**	1878	579
416.gamess	80	**2020**	**775**	2020	776	2024	774	80	1933	810	1930	811	**1932**	**811**
433.milc	80	1237	594	1238	593	**1237**	**594**	80	1237	594	1238	593	**1237**	**594**
434.zeusmp	80	873	834	**875**	**832**	878	829	80	873	834	**875**	**832**	878	829
435.gromacs	80	**767**	**745**	767	745	769	743	80	**763**	**748**	763	748	761	750
436.cactusADM	80	1154	828	**1156**	**827**	1168	819	80	1154	828	**1156**	**827**	1168	819
437.leslie3d	80	1821	413	1819	413	**1820**	**413**	80	1823	413	**1821**	**413**	1821	413
444.namd	80	919	698	**920**	**697**	921	697	80	**906**	**708**	906	708	912	704
447.dealII	80	**673**	**1360**	678	1350	671	1360	80	**673**	**1360**	678	1350	671	1360
450.soplex	80	1386	481	1387	481	**1386**	**481**	80	1275	523	**1277**	**522**	1278	522
453.povray	80	401	1060	400	1070	**400**	**1060**	80	346	1230	**344**	**1240**	344	1240
454.calculix	80	**744**	**887**	742	890	747	884	80	**744**	**887**	742	890	747	884
459.GemsFDTD	80	**2075**	**409**	2076	409	2075	409	80	**2075**	**409**	2076	409	2075	409
465.tonto	80	866	909	**866**	**909**	870	904	80	**843**	**934**	839	939	845	931
470.lbm	80	**1342**	**819**	1342	819	1346	817	80	**1342**	**819**	1342	819	1346	817
481.wrf	80	**1259**	**710**	1261	709	1259	710	80	1238	722	1239	721	**1238**	**722**
482.sphinx3	80	2162	721	**2163**	**721**	2164	721	80	2091	746	**2091**	**746**	2091	746

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
numactl was used to bind copies to the cores
```

Platform Notes

```
BIOS configuration:
 HP Power Profile set to Maximum Performance
 Thermal Configuration set to Increased Cooling
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/smartheap:/cpu2006/ic12.1-libs/ia32/:/cpu2006/ic12.1-libs/intel64"

 Stack size set to unlimited using "ulimit -s unlimited"
 Transparent Huge Pages disabled with:
 echo never  > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc   -m64
```

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
```
icpc  -m64
```

450.soplex: `icpc -m32`

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3 -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto -inline-calloc -opt-malloc-options=3`

Benchmarks using both Fortran and C:

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-opt-mem-layout-trans=3`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -static -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.html`
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.xml`
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:43:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 November 2011.