SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL165 G7
(2.3 GHz AMD Opteron 6276)

SPECfp®_rate2006 = 351

SPECfp_rate_base2006 = 327

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

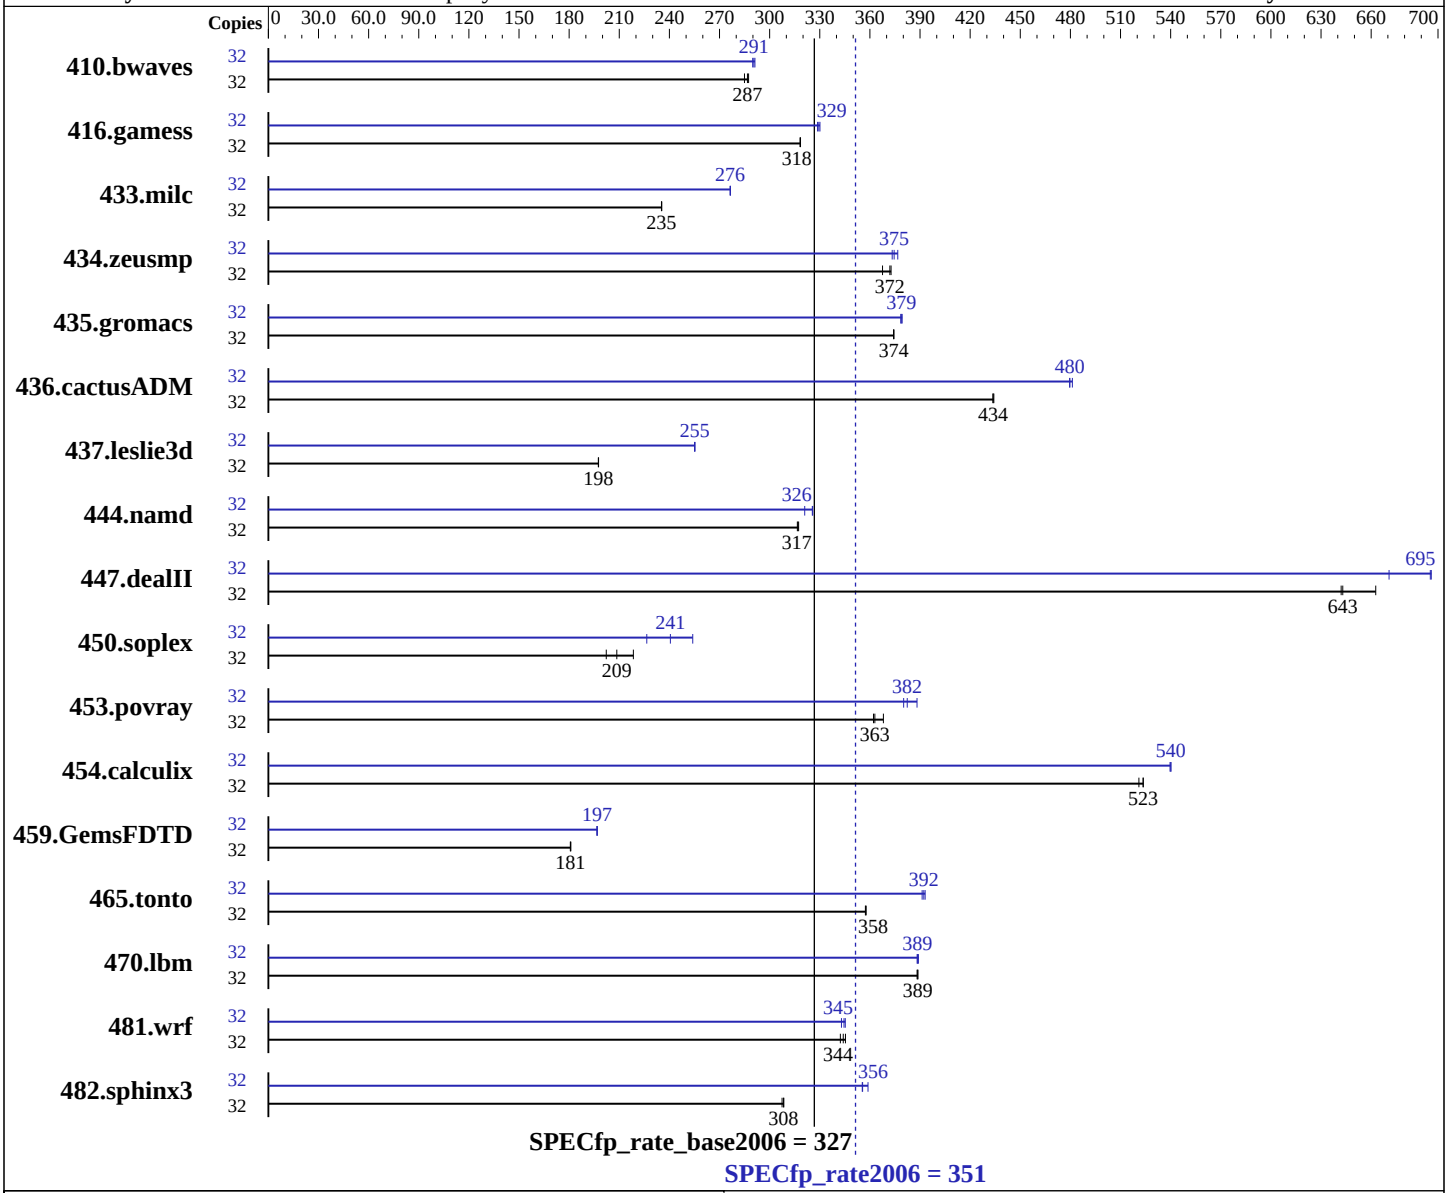

Hardware

CPU Name:	AMD Opteron 6276
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	32 cores, 2 chips, 16 cores/chip
CPU(s) orderable:	1,2 chips

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL165 G7
(2.3 GHz AMD Opteron 6276)

SPECfp_rate2006 = 351

SPECfp_rate_base2006 = 327

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Primary Cache: 512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 120 GB 5.4 K SATA
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1526	285	**1517**	**287**	1513	287	32	1493	291	1500	290	**1497**	**291**
416.gamess	32	**1968**	**318**	1967	318	1969	318	32	1906	329	1898	330	**1902**	**329**
433.milc	32	**1249**	**235**	1248	235	1249	235	32	**1063**	**276**	1063	276	1062	277
434.zeusmp	32	792	368	**783**	**372**	781	373	32	**778**	**375**	780	373	773	377
435.gromacs	32	611	374	610	374	**610**	**374**	32	604	378	602	379	**603**	**379**
436.cactusADM	32	882	434	881	434	**882**	**434**	32	797	480	795	481	**797**	**480**
437.leslie3d	32	**1523**	**198**	1522	198	1523	198	32	1179	255	1178	255	**1179**	**255**
444.namd	32	811	317	**810**	**317**	809	317	32	**788**	**326**	800	321	788	326
447.dealII	32	570	642	**569**	**643**	552	663	32	**526**	**695**	546	671	526	696
450.soplex	32	1320	202	**1280**	**209**	1222	218	32	**1109**	**241**	1178	226	1051	254
453.povray	32	470	362	**469**	**363**	463	368	32	448	380	**445**	**382**	439	388
454.calculix	32	507	521	504	524	**504**	**523**	32	489	540	**489**	**540**	489	540
459.GemsFDTD	32	1879	181	**1877**	**181**	1876	181	32	1726	197	1725	197	**1725**	**197**
465.tonto	32	880	358	**881**	**358**	881	357	32	801	393	805	391	**803**	**392**
470.lbm	32	1131	389	1133	388	**1131**	**389**	32	**1132**	**389**	1130	389	1132	388
481.wrf	32	**1039**	**344**	1044	342	1035	345	32	**1038**	**345**	1035	345	1042	343
482.sphinx3	32	**2023**	**308**	2022	308	2029	307	32	1755	355	**1754**	**356**	1738	359

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set "echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled"
```

Continued on next page

Operating System Notes (Continued)

```
Set "kernel/randomize_va_space=0" in /etc/sysctl.conf

Set vm/nr_hugepages=28672 in /etc/sysctl.conf
Set "nodev       /mnt/hugepages    hugetlbfs   defaults  0 0" in /etc/fstab
```

Platform Notes

```
BIOS configuration:
 Power Efficiency Mode set to Performance
 1 GB PCI Memory Gap set to Disabled
 Memory Clock Speed set to 1333MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1104-rate-libs-revA/32:/cpu2006/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Fortran benchmarks:
`openf95`

Benchmarks using both Fortran and C:
`opencc openf95`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:
-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:
-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on -OPT:unroll_times_max=8 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

C++ benchmarks:

444.namd: -march=bdver1 -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off -CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0 -fno-emit-exceptions -m32 -OPT:unroll_times_max=8 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -m32
-HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-march=bdver1 -Ofast -OPT:unroll_size=256 -GRA:optimize_boundary=on -HP:bdt=2m:heap=2m`

481.wrf: `-march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -CG:load_exe=1 -HP -WOPT:sib=on`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html
http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml
http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:54:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 November 2011.