SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R515
(AMD Opteron 4274 HE, 2.50 GHz)

SPECfp®_rate2006 = 189

SPECfp_rate_base2006 = 175

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2011
Hardware Availability: Dec-2011
Software Availability: Jul-2011

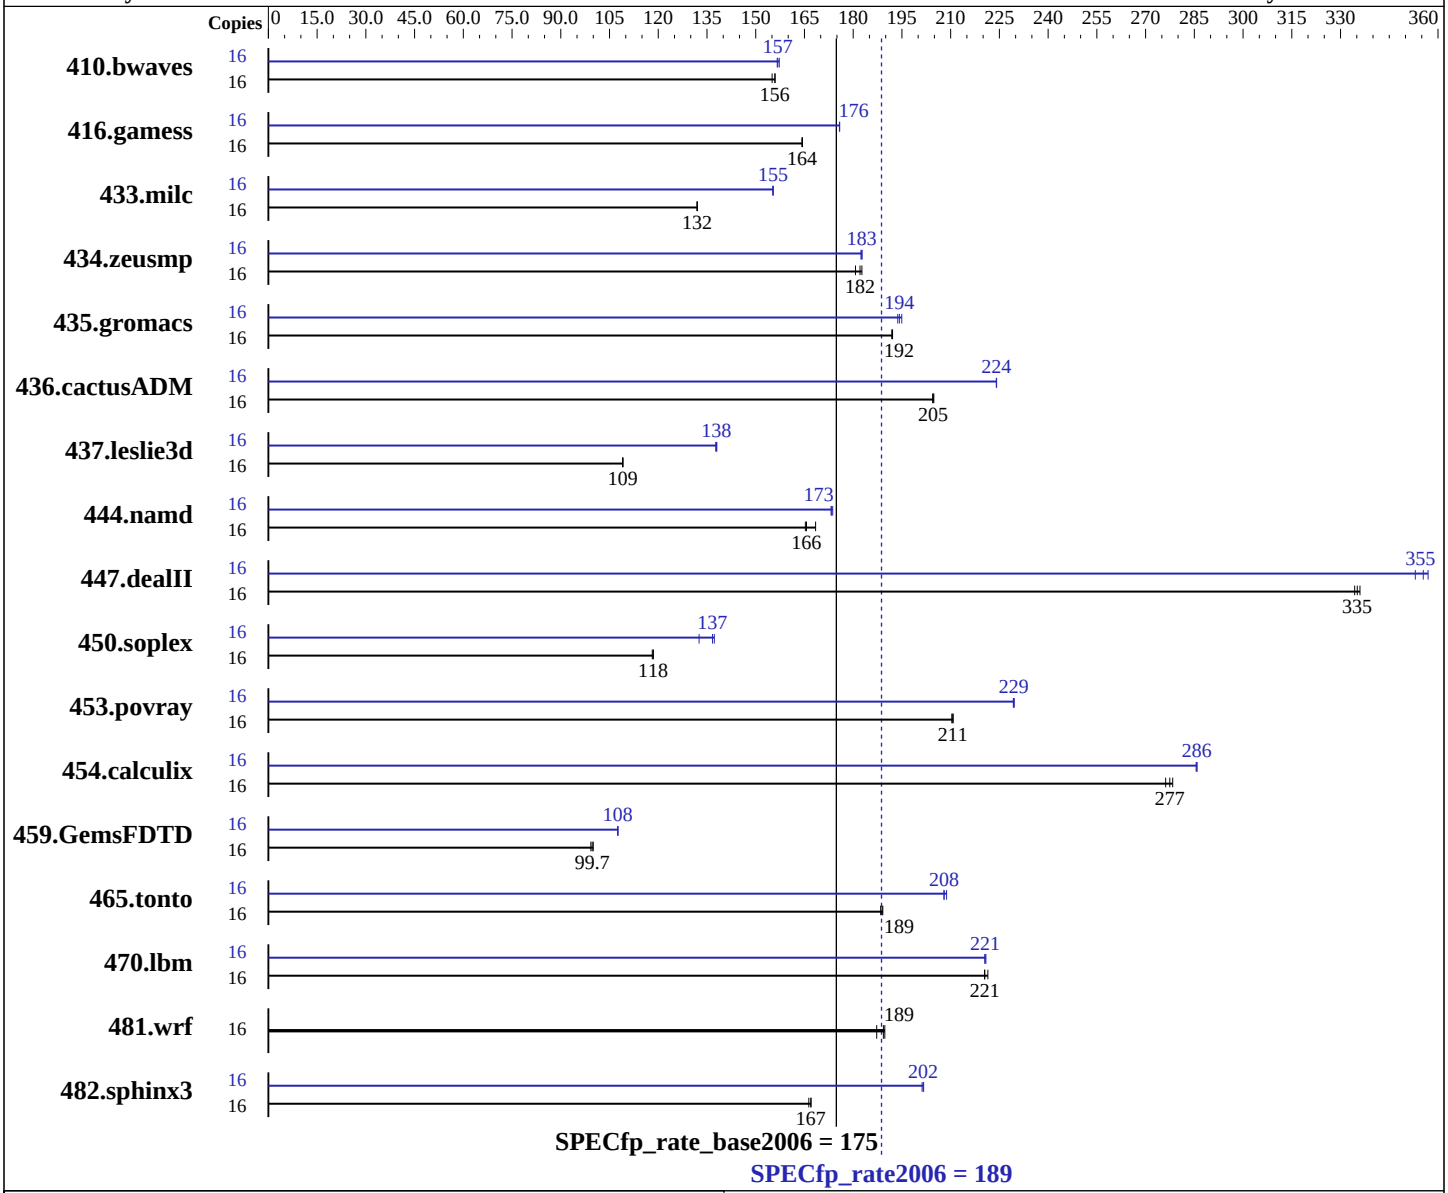

Hardware

CPU Name:	AMD Opteron 4274 HE
CPU Characteristics:	AMD Turbo CORE technology up to 3.50 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R515
(AMD Opteron 4274 HE, 2.50 GHz)

SPECfp_rate2006 = 189

SPECfp_rate_base2006 = 175

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2011
Hardware Availability: Dec-2011
Software Availability: Jul-2011

Primary Cache: 256 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 2 x 73 GB SAS, 15000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1394	156	**1395**	**156**	1402	155	16	1388	157	1383	157	**1387**	**157**
416.gamess	16	**1906**	**164**	1908	164	1906	164	16	1782	176	1782	176	**1782**	**176**
433.milc	16	**1113**	**132**	1113	132	1113	132	16	**945**	**155**	945	155	946	155
434.zeusmp	16	**800**	**182**	797	183	806	181	16	797	183	798	182	**797**	**183**
435.gromacs	16	595	192	595	192	**595**	**192**	16	**588**	**194**	586	195	590	194
436.cactusADM	16	934	205	**934**	**205**	935	204	16	853	224	853	224	**853**	**224**
437.leslie3d	16	1378	109	**1379**	**109**	1379	109	16	1090	138	1092	138	**1090**	**138**
444.namd	16	762	168	**775**	**166**	776	165	16	**740**	**173**	741	173	739	174
447.dealII	16	545	336	547	334	**546**	**335**	16	**515**	**355**	518	353	513	357
450.soplex	16	1129	118	**1127**	**118**	1126	118	16	1007	133	**976**	**137**	972	137
453.povray	16	405	210	404	211	**404**	**211**	16	**371**	**229**	371	230	371	229
454.calculix	16	474	278	**476**	**277**	478	276	16	**462**	**286**	462	286	462	286
459.GemsFDTD	16	**1703**	**99.7**	1710	99.3	1698	100	16	1579	108	**1578**	**108**	1578	108
465.tonto	16	**834**	**189**	835	188	832	189	16	**757**	**208**	754	209	757	208
470.lbm	16	993	221	**997**	**221**	997	220	16	995	221	**997**	**221**	997	220
481.wrf	16	**944**	**189**	955	187	942	190	16	**944**	**189**	955	187	942	190
482.sphinx3	16	1875	166	1867	167	**1868**	**167**	16	1550	201	**1547**	**202**	1546	202

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit
Large pages were not enabled for this run
Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1
```

Continued on next page

Operating System Notes (Continued)

Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Platform Notes

'Power Management' set to 'Maximum Performance' in BIOS

General Notes

environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd1104-rate-libs-revA/32:/root/cpu2006-1.1/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:
-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:
-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

C++ benchmarks:

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -m32

Continued on next page

Peak Optimization Flags (Continued)

450.soplex (continued):
-HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.html`
`http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.xml`
`http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:35:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 December 2011.