SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6212

SPECfp®_rate2006 = 247

SPECfp_rate_base2006 = 231

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Nov-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

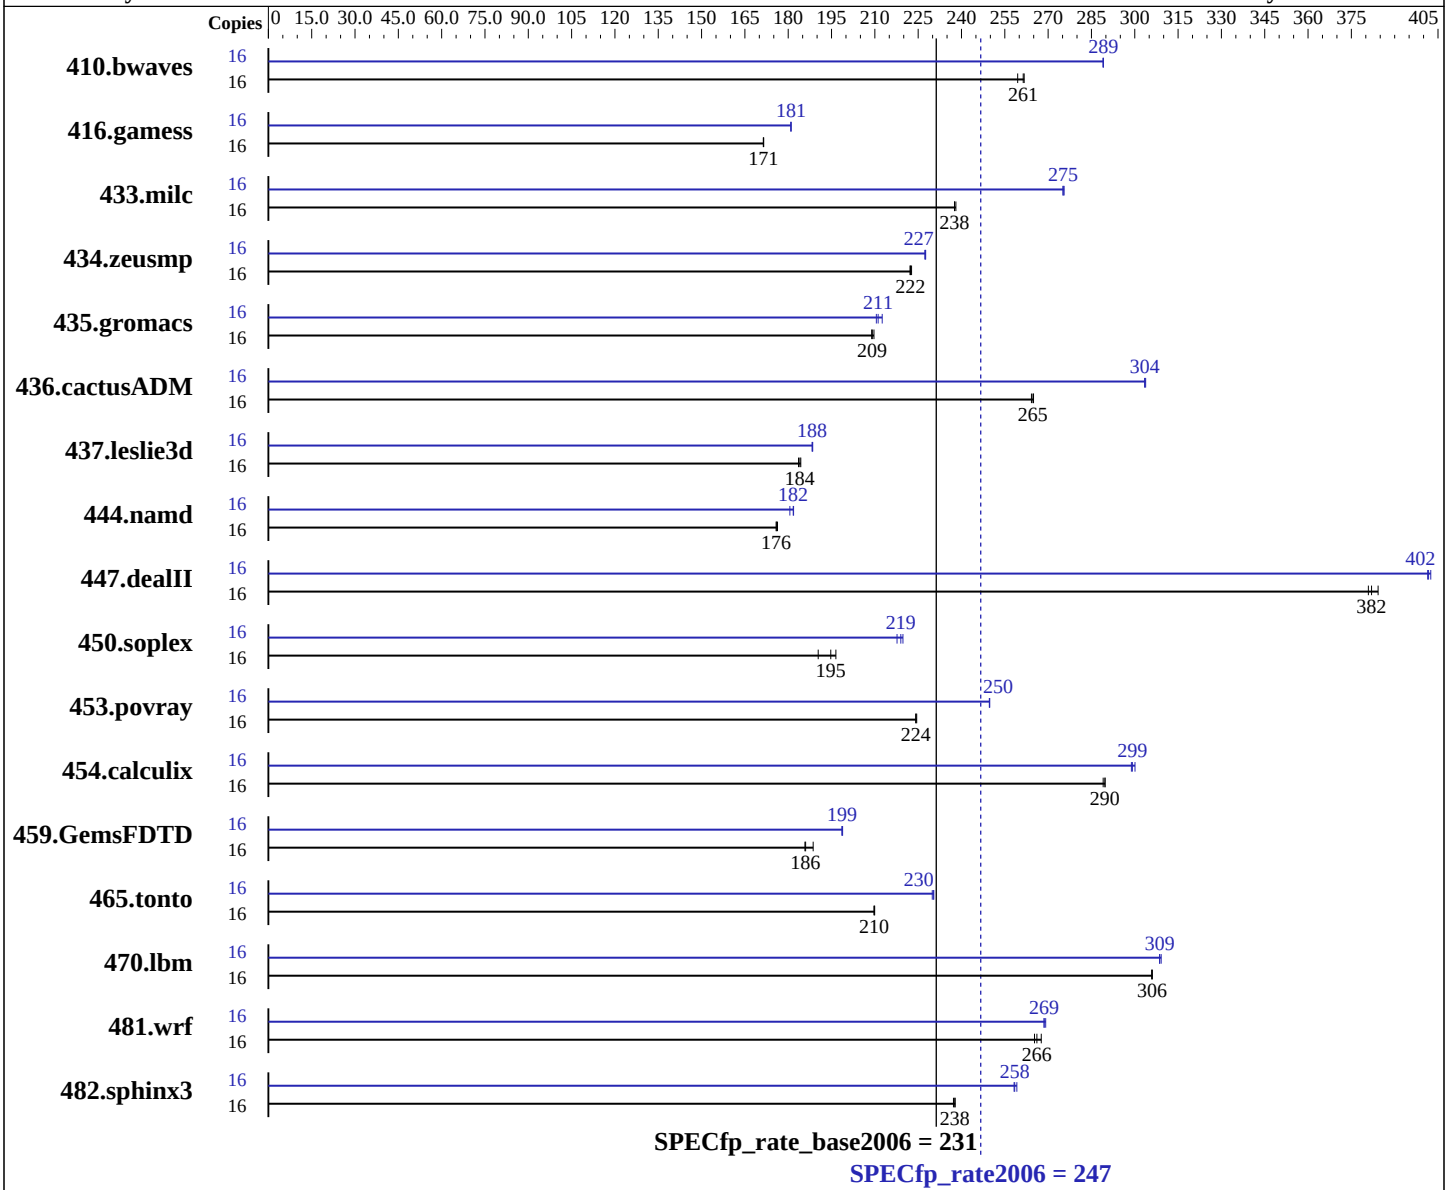

Hardware

CPU Name:	AMD Opteron 6212
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6212

SPECfp_rate2006 = 247

SPECfp_rate_base2006 = 231

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Nov-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Primary Cache: 256 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 4 cores
Other Cache: None
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	838	259	831	262	**832**	**261**	16	752	289	752	289	**752**	**289**
416.gamess	16	1827	172	**1827**	**171**	1828	171	16	1731	181	1732	181	**1731**	**181**
433.milc	16	618	238	617	238	**618**	**238**	16	**534**	**275**	533	276	534	275
434.zeusmp	16	654	223	**655**	**222**	655	222	16	641	227	**640**	**227**	640	228
435.gromacs	16	545	210	547	209	**546**	**209**	16	537	213	**541**	**211**	543	211
436.cactusADM	16	**722**	**265**	722	265	724	264	16	629	304	630	303	**630**	**304**
437.leslie3d	16	816	184	819	184	**817**	**184**	16	798	188	799	188	**799**	**188**
444.namd	16	**730**	**176**	730	176	728	176	16	**706**	**182**	711	181	706	182
447.dealII	16	476	384	**479**	**382**	481	381	16	**456**	**402**	456	401	455	402
450.soplex	16	701	190	**685**	**195**	679	197	16	**609**	**219**	613	218	607	220
453.povray	16	379	224	**380**	**224**	380	224	16	341	250	341	250	**341**	**250**
454.calculix	16	456	290	457	289	**456**	**290**	16	440	300	442	299	**441**	**299**
459.GemsFDTD	16	900	189	**913**	**186**	914	186	16	854	199	855	199	**854**	**199**
465.tonto	16	751	210	750	210	**750**	**210**	16	683	230	**684**	**230**	685	230
470.lbm	16	719	306	718	306	**719**	**306**	16	711	309	**712**	**309**	712	309
481.wrf	16	668	268	**672**	**266**	674	265	16	664	269	**665**	**269**	665	269
482.sphinx3	16	**1312**	**238**	1315	237	1311	238	16	**1207**	**258**	1208	258	1203	259

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
```

Continued on next page

Operating System Notes (Continued)

```
Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/root/work/cpu2006v1.1/amd1104-rate-libs-revA/32:/root/work/cpu2006v1.1/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Fortran benchmarks:
`openf95`

Benchmarks using both Fortran and C:
`opencc openf95`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:
-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:
-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

C++ benchmarks:

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off

Continued on next page

Peak Optimization Flags (Continued)

450.soplex (continued):
-OPT:fold_unsigned_relops=on -fno-exceptions -m32
-HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -CG:load_exe=1 -HP -WOPT:sib=on`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html`
`http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml`
`http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 03:18:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 January 2012.