



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

(Test Sponsor: Acer Incorporation)

**SPECint®2006 = 54.2**

**Acer AR320 F2 (Xeon E3-1280)**

**SPECint\_base2006 = 51.1**

CPU2006 license: 97


Test sponsor: Acer Incorporation

Tested by: Acer Incorporation

Test date: Dec-2011

Hardware Availability: Jan-2012

Software Availability: Dec-2011

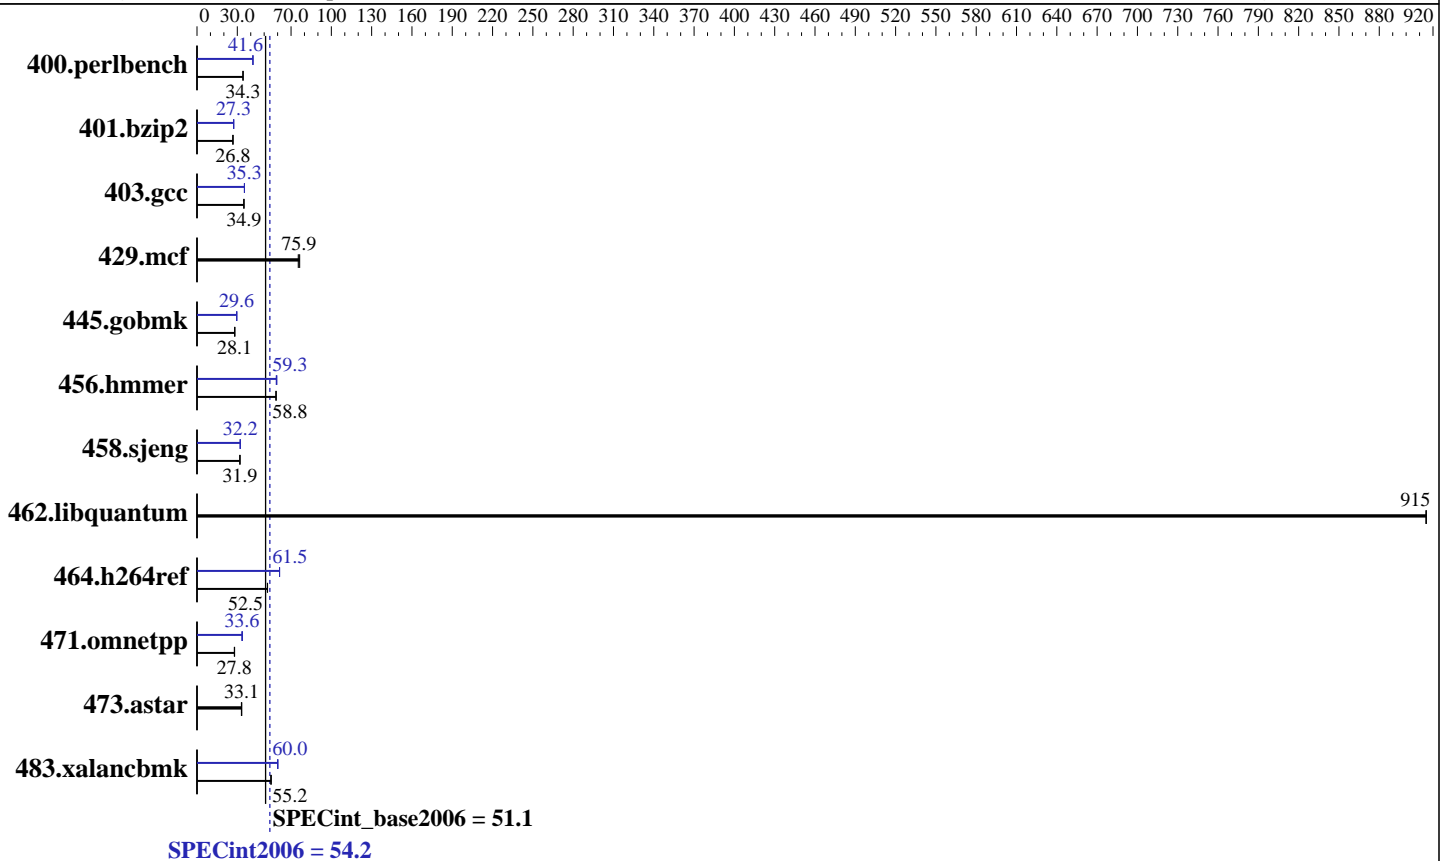

## Hardware

CPU Name: Intel Xeon E3-1280  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9,ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.1  
 Kernel 2.6.32-131.0.15.el6.x86\_64-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated  
(Test Sponsor: Acer Incorporation)

SPECint2006 = 54.2

Acer AR320 F2 (Xeon E3-1280)

SPECint\_base2006 = 51.1

CPU2006 license: 97  
Test sponsor: Acer Incorporation  
Tested by: Acer Incorporation

Test date: Dec-2011  
Hardware Availability: Jan-2012  
Software Availability: Dec-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	285	34.3	285	34.2	<u>285</u>	<u>34.3</u>	234	41.7	235	41.6	<u>235</u>	<u>41.6</u>
401.bzip2	361	26.8	361	26.8	<u>361</u>	<u>26.8</u>	353	27.3	<u>353</u>	<u>27.3</u>	354	27.3
403.gcc	230	35.0	231	34.9	<u>231</u>	<u>34.9</u>	228	35.3	<u>228</u>	<u>35.3</u>	228	35.3
429.mcf	<u>120</u>	<u>75.9</u>	119	76.4	121	75.4	<u>120</u>	<u>75.9</u>	119	76.4	121	75.4
445.gobmk	373	28.1	373	28.1	<u>373</u>	<u>28.1</u>	355	29.6	355	29.6	<u>355</u>	<u>29.6</u>
456.hmmmer	159	58.8	159	58.9	<u>159</u>	<u>58.8</u>	157	59.4	<u>157</u>	<u>59.3</u>	158	59.0
458.sjeng	379	32.0	379	31.9	<u>379</u>	<u>31.9</u>	376	32.2	<u>376</u>	<u>32.2</u>	376	32.2
462.libquantum	<u>22.6</u>	<u>915</u>	22.6	915	22.6	915	<u>22.6</u>	<u>915</u>	22.6	915	22.6	915
464.h264ref	421	52.5	422	52.4	<u>422</u>	<u>52.5</u>	360	61.4	<u>360</u>	<u>61.5</u>	360	61.5
471.omnetpp	225	27.8	<u>224</u>	<u>27.8</u>	223	28.0	187	33.4	<u>186</u>	<u>33.6</u>	185	33.9
473.astar	<u>212</u>	<u>33.1</u>	212	33.0	211	33.3	<u>212</u>	<u>33.1</u>	212	33.0	211	33.3
483.xalancbmk	126	55.0	125	55.2	<u>125</u>	<u>55.2</u>	115	60.0	115	60.3	<u>115</u>	<u>60.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Large pages were disabled for this run.

## General Notes

Binaries compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated  
(Test Sponsor: Acer Incorporation)

SPECint2006 = 54.2

Acer AR320 F2 (Xeon E3-1280)

SPECint\_base2006 = 51.1

CPU2006 license: 97  
Test sponsor: Acer Incorporation  
Tested by: Acer Incorporation

Test date: Dec-2011  
Hardware Availability: Jan-2012  
Software Availability: Dec-2011

## Base Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs  
-L/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
400.perlbench: icc -m32  
445.gobmk: icc -m32  
464.h264ref: icc -m32  
C++ benchmarks (except as noted below):  
icpc -m32  
473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**  
(Test Sponsor: Acer Incorporation)

**SPECint2006 = 54.2**

**Acer AR320 F2 (Xeon E3-1280)**

**SPECint\_base2006 = 51.1**

**CPU2006 license:** 97

**Test date:** Dec-2011

**Test sponsor:** Acer Incorporation

**Hardware Availability:** Jan-2012

**Tested by:** Acer Incorporation

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
           -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
         -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
           -ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
           -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2)
             -opt-ra-region-strategy=block -ansi-alias
             -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**  
(Test Sponsor: Acer Incorporation)

**SPECint2006 = 54.2**

**Acer AR320 F2 (Xeon E3-1280)**

**SPECint\_base2006 = 51.1**

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporation  
**Tested by:** Acer Incorporation

**Test date:** Dec-2011  
**Hardware Availability:** Jan-2012  
**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 01:57:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 February 2012.