SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4 (Intel Xeon E5-2660)

SPECfp®2006 = 80.5

SPECfp_base2006 = 76.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Oct-2011

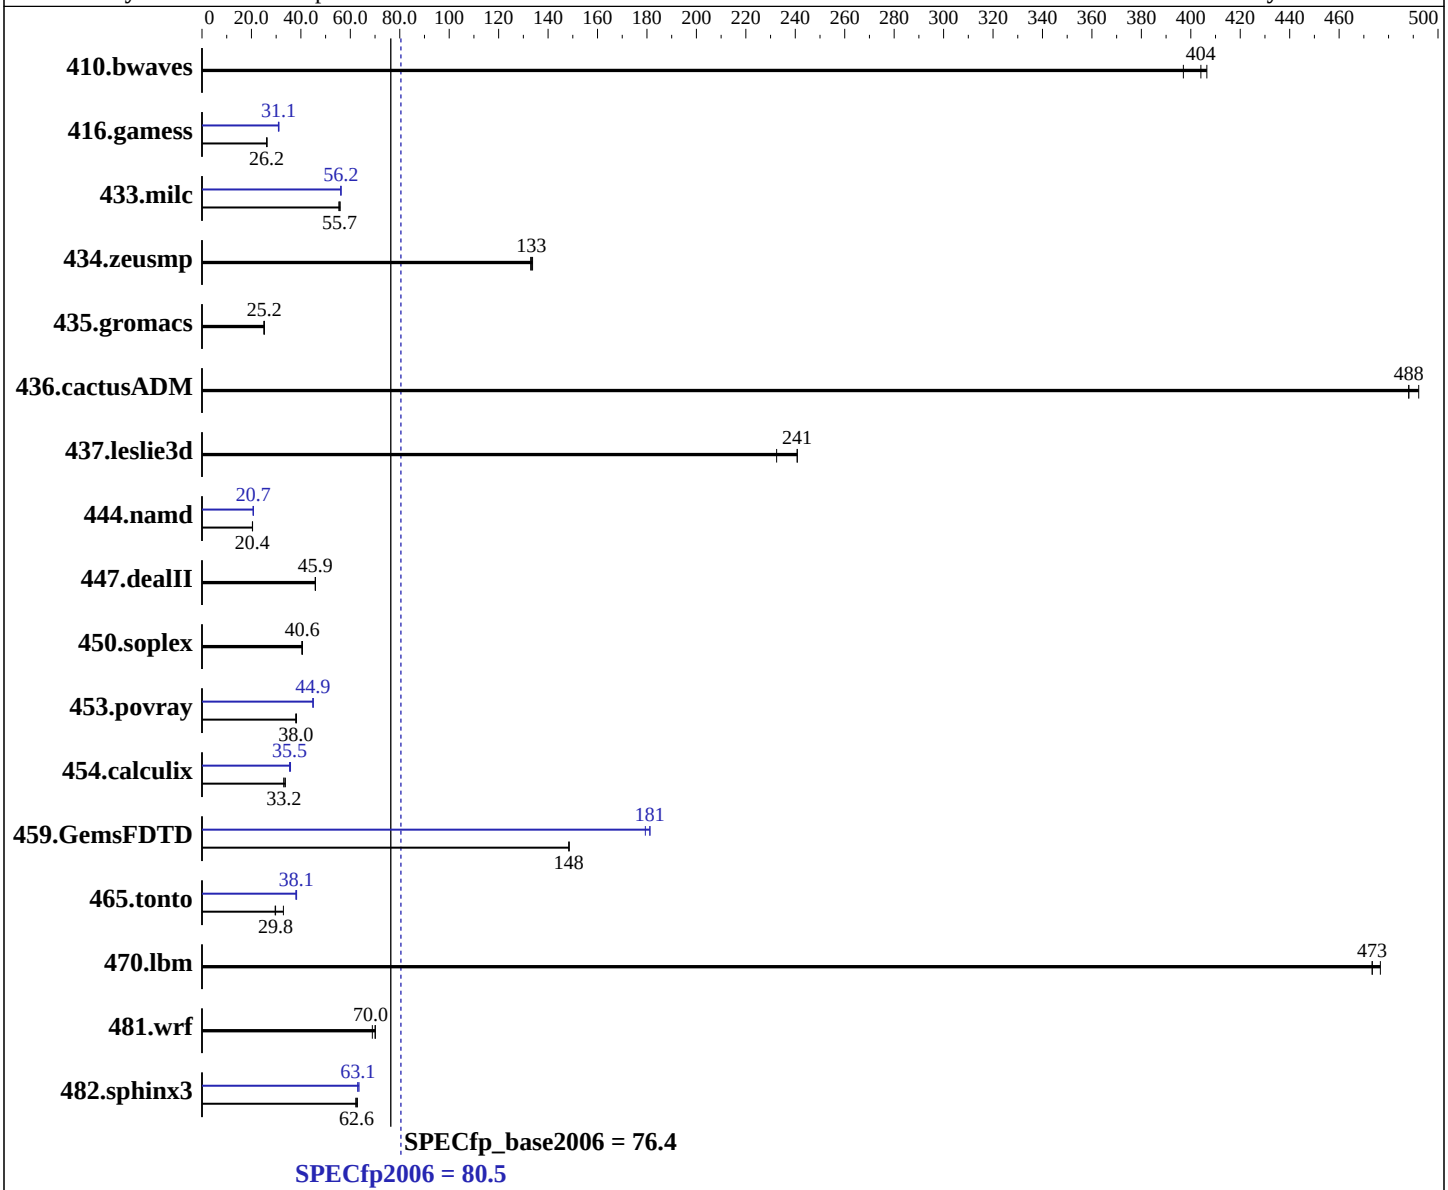

Hardware

CPU Name:	Intel Xeon E5-2660
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1 (Santiago) 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4 (Intel Xeon E5-2660)

SPECfp2006 = 80.5

SPECfp_base2006 = 76.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Oct-2011

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16 x 4 GB 2Rx8 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 300 GB SAS, 15000 RPM
Other Hardware: None

System State: Run level 3 (add definition here)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	33.4	406	34.2	397	**33.6**	**404**	33.4	406	34.2	397	**33.6**	**404**
416.gamess	746	26.2	747	26.2	**747**	**26.2**	**630**	**31.1**	633	30.9	630	31.1
433.milc	**165**	**55.7**	164	55.9	166	55.4	163	56.2	**163**	**56.2**	163	56.2
434.zeusmp	**68.2**	**133**	68.1	134	68.4	133	**68.2**	**133**	68.1	134	68.4	133
435.gromacs	285	25.1	**283**	**25.2**	283	25.2	285	25.1	**283**	**25.2**	283	25.2
436.cactusADM	**24.5**	**488**	24.3	492	24.5	488	**24.5**	**488**	24.3	492	24.5	488
437.leslie3d	**39.0**	**241**	40.4	232	39.0	241	**39.0**	**241**	40.4	232	39.0	241
444.namd	393	20.4	392	20.5	**393**	**20.4**	**387**	**20.7**	387	20.7	386	20.8
447.dealII	249	45.9	250	45.9	**249**	**45.9**	249	45.9	250	45.9	**249**	**45.9**
450.soplex	207	40.4	205	40.6	**205**	**40.6**	207	40.4	205	40.6	**205**	**40.6**
453.povray	**140**	**38.0**	139	38.2	140	38.0	**118**	**44.9**	119	44.9	118	45.0
454.calculix	245	33.7	249	33.1	**249**	**33.2**	**232**	**35.5**	230	35.8	233	35.5
459.GemsFDTD	71.5	148	71.5	148	**71.5**	**148**	59.2	179	58.6	181	**58.6**	**181**
465.tonto	332	29.6	299	32.9	**331**	**29.8**	**258**	**38.1**	259	38.0	257	38.3
470.lbm	28.8	477	**29.0**	**473**	29.0	473	28.8	477	**29.0**	**473**	29.0	473
481.wrf	**159**	**70.0**	159	70.1	162	68.9	**159**	**70.0**	159	70.1	162	68.9
482.sphinx3	310	62.9	313	62.2	**312**	**62.6**	**309**	**63.1**	309	63.0	307	63.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Platform Notes

```
BIOS Settings:
Operating Mode set to Maximum Performance
Sysinfo program /root/SPECcpu-v1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on x3500M4 Sun Mar 25 13:18:57 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2660 0 @ 2.20GHz
          2 "physical id"s (chips)
          32 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 8
          siblings  : 16
          physical 0: cores 0 1 2 3 4 5 6 7
          physical 1: cores 0 1 2 3 4 5 6 7
       cache size : 20480 KB

    From /proc/meminfo
       MemTotal:       66044804 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    /usr/bin/lsb_release -d
       Red Hat Enterprise Linux Server release 6.1 (Santiago)

    From /etc/*release* /etc/*version*
       redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
       system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

    uname -a:
       Linux x3500M4 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10 15:42:40 EDT 2011
       x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Mar 22 11:45

    SPEC is set to: /root/SPECcpu-v1.2
       Filesystem     Type    Size  Used Avail Use% Mounted on
       /dev/mapper/vg_x3500m4-lv_root
                      ext4    210G   69G  131G  35% /

    Additional information from dmidecode:
      Memory:
       16x Samsung M393B5273DH0-CK0 4 GB 1600 MHz 2 rank

    (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/root/SPECcpu-v1.2/libs/32:/root/SPECcpu-v1.2/libs/64"
OMP_NUM_THREADS = "16"
```

Continued on next page

General Notes (Continued)

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M4 (Intel Xeon E5-2660)

SPECfp2006 = 80.5

SPECfp_base2006 = 76.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Oct-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 07:21:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 April 2012.