SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S7, Intel Xeon E5-2603, 1.80 GHz

SPECfp®_rate2006 = 182

SPECfp_rate_base2006 = 177

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

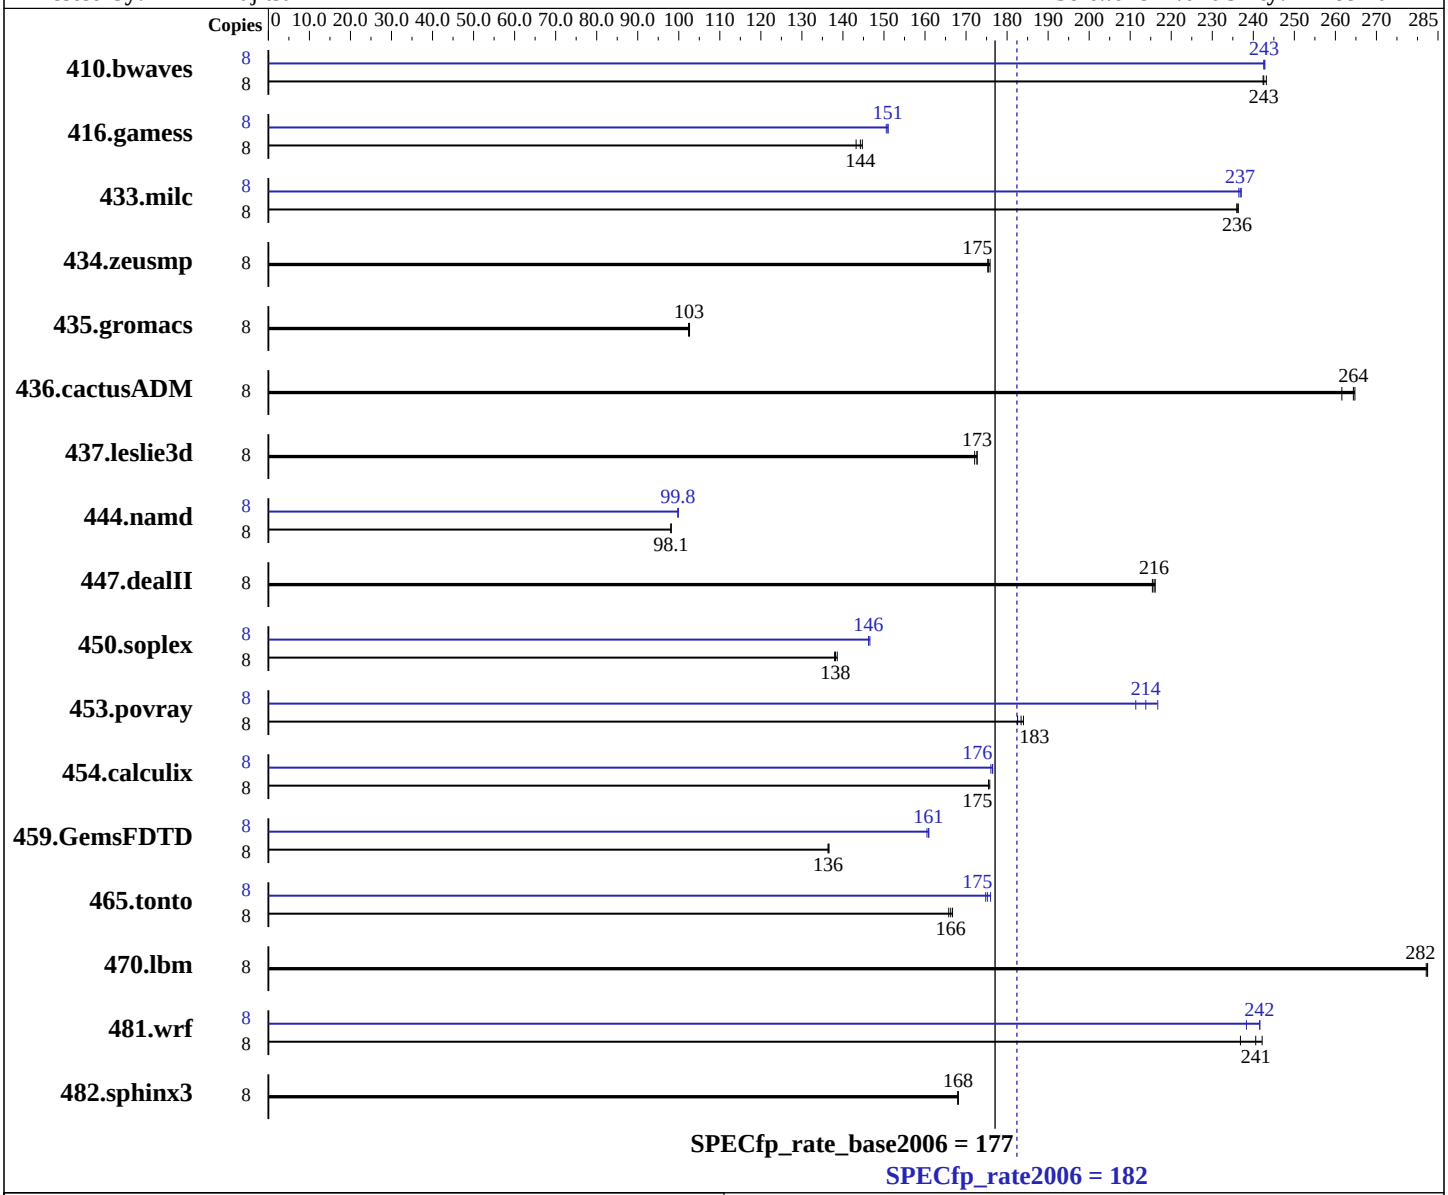

Hardware

CPU Name:	Intel Xeon E5-2603
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S7, Intel Xeon E5-2603, 1.80 GHz

SPECfp_rate2006 = 182

SPECfp_rate_base2006 = 177

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1067 MHz and CL7)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	449	242	**448**	**243**	447	243	8	448	243	448	243	**448**	**243**
416.gamess	8	**1086**	**144**	1082	145	1094	143	8	1037	151	**1038**	**151**	1040	151
433.milc	8	311	236	311	236	**311**	**236**	8	**310**	**237**	311	236	310	237
434.zeusmp	8	**415**	**175**	415	175	414	176	8	**415**	**175**	415	175	414	176
435.gromacs	8	557	103	558	102	**557**	**103**	8	557	103	558	102	**557**	**103**
436.cactusADM	8	365	262	361	265	**362**	**264**	8	365	262	361	265	**362**	**264**
437.leslie3d	8	**435**	**173**	435	173	437	172	8	**435**	**173**	435	173	437	172
444.namd	8	**654**	**98.1**	654	98.1	654	98.1	8	643	99.8	642	99.9	**643**	**99.8**
447.dealII	8	**424**	**216**	425	215	424	216	8	**424**	**216**	425	215	424	216
450.soplex	8	484	138	481	139	**483**	**138**	8	456	146	**456**	**146**	455	147
453.povray	8	233	183	**232**	**183**	231	184	8	**199**	**214**	201	211	196	217
454.calculix	8	**376**	**175**	376	175	375	176	8	**374**	**176**	374	176	375	176
459.GemsFDTD	8	622	136	621	137	**622**	**136**	8	529	160	527	161	**528**	**161**
465.tonto	8	472	167	**473**	**166**	475	166	8	**449**	**175**	447	176	450	175
470.lbm	8	390	282	389	282	**389**	**282**	8	390	282	389	282	**389**	**282**
481.wrf	8	377	237	369	242	**371**	**241**	8	370	242	**370**	**242**	375	238
482.sphinx3	8	928	168	**928**	**168**	927	168	8	928	168	**928**	**168**	927	168

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 This result was measured on the PRIMERGY RX350 S7. The PRIMERGY RX350 S7
 and the PRIMERGY TX300 S7 are electronically equivalent.
 For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
  459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
       470.lbm: -DSPEC_CPU_LP64
       481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
465.tonto: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xAVX -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3`

481.wrf: `Same as 454.calculix`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 07:35:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 April 2012.