



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TC-HTRF4
(H8DCT-HLN4F, AMD Opteron 4280)

SPECfp®_rate2006 = 200

SPECfp_rate_base2006 = 185

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

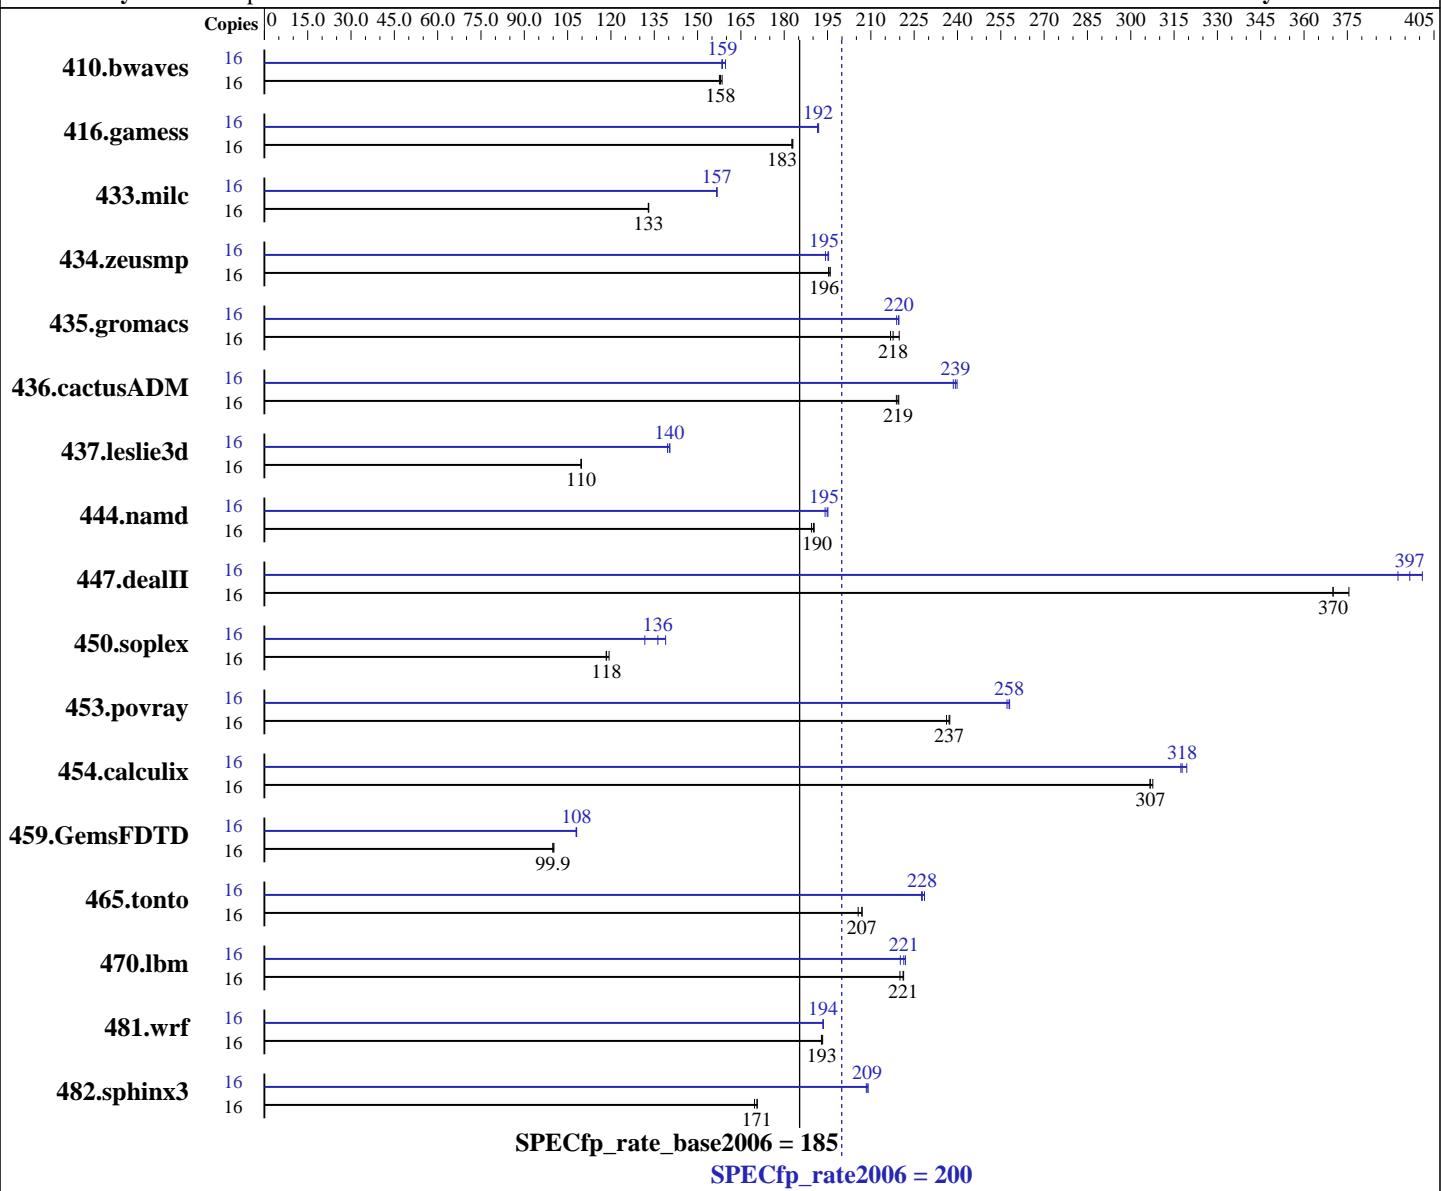

Hardware

CPU Name: AMD Opteron 4280
CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz
CPU MHz: 2800
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
CPU(s) orderable: 1,2 chips

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel: No
File System: ext3
System State: Run level 3 (Full multiuser with network)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TC-HTRF4
(H8DCT-HLN4F, AMD Opteron 4280)

SPECfp_rate2006 = 200

SPECfp_rate_base2006 = 185

CPU2006 license: 001176

Test date: Jan-2012

Test sponsor: Supermicro

Hardware Availability: Nov-2011

Tested by: Supermicro

Software Availability: Dec-2011

Primary Cache:	256 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core	Other Software:	None
Secondary Cache:	8 MB I+D on chip per chip, 2 MB shared / 2 cores		
L3 Cache:	8 MB I+D on chip per chip		
Other Cache:	None		
Memory:	32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)		
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM		
Other Hardware:	None		

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1372	158	<u>1377</u>	<u>158</u>	1380	158	16	1373	158	<u>1371</u>	<u>159</u>	1362	160
416.gamess	16	1715	183	<u>1714</u>	<u>183</u>	1712	183	16	1632	192	1635	192	<u>1634</u>	<u>192</u>
433.milc	16	<u>1104</u>	<u>133</u>	1105	133	1104	133	16	937	157	<u>937</u>	<u>157</u>	938	157
434.zeusmp	16	<u>745</u>	<u>196</u>	743	196	745	195	16	745	195	<u>746</u>	<u>195</u>	749	194
435.gromacs	16	520	220	<u>525</u>	<u>218</u>	527	217	16	<u>520</u>	<u>220</u>	522	219	520	220
436.cactusADM	16	870	220	874	219	<u>871</u>	<u>219</u>	16	802	239	<u>799</u>	<u>239</u>	797	240
437.leslie3d	16	<u>1371</u>	<u>110</u>	1370	110	1371	110	16	1077	140	1071	140	<u>1073</u>	<u>140</u>
444.namd	16	677	189	<u>675</u>	<u>190</u>	674	190	16	661	194	658	195	<u>658</u>	<u>195</u>
447.dealII	16	495	370	<u>495</u>	<u>370</u>	487	376	16	<u>461</u>	<u>397</u>	466	393	456	401
450.soplex	16	1127	118	<u>1126</u>	<u>118</u>	1118	119	16	1013	132	<u>979</u>	<u>136</u>	960	139
453.povray	16	<u>359</u>	<u>237</u>	359	237	360	236	16	331	257	330	258	<u>330</u>	<u>258</u>
454.calculix	16	430	307	<u>430</u>	<u>307</u>	429	308	16	<u>415</u>	<u>318</u>	413	319	416	317
459.GemsFDTD	16	1699	99.9	<u>1698</u>	<u>99.9</u>	1693	100	16	1573	108	<u>1571</u>	<u>108</u>	1570	108
465.tonto	16	<u>761</u>	<u>207</u>	766	206	761	207	16	692	228	<u>691</u>	<u>228</u>	689	229
470.lbm	16	<u>994</u>	<u>221</u>	993	221	999	220	16	998	220	990	222	<u>993</u>	<u>221</u>
481.wrf	16	927	193	<u>926</u>	<u>193</u>	925	193	16	924	193	923	194	<u>924</u>	<u>194</u>
482.sphinx3	16	1837	170	<u>1828</u>	<u>171</u>	1827	171	16	1496	208	1491	209	<u>1494</u>	<u>209</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TC-HTRF4
(H8DCT-HLN4F, AMD Opteron 4280)

SPECfp_rate2006 = 200

SPECfp_rate_base2006 = 185

CPU2006 license: 001176

Test date: Jan-2012

Test sponsor: Supermicro

Hardware Availability: Nov-2011

Tested by: Supermicro

Software Availability: Dec-2011

Operating System Notes (Continued)

Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Huge pages were not configured for this run.

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2006/amd1104-rate-libs-revB/32:/usr/cpu2006/amd1104-rate-libs-revB/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TC-HTRF4
(H8DCT-HLN4F, AMD Opteron 4280)

SPECfp_rate2006 = 200

SPECfp_rate_base2006 = 185

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

```
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small_pu=100 -mso
```

C++ benchmarks:

```
-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET
```

Fortran benchmarks:

```
-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2  
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso
```

Benchmarks using both Fortran and C:

```
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off  
-OPT:rsqrt=2 -OPT:unroll_size=256
```

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TC-HTRF4
(H8DCT-HLN4F, AMD Opteron 4280)

SPECfp_rate2006 = 200

SPECfp_rate_base2006 = 185

CPU2006 license: 001176

Test date: Jan-2012

Test sponsor: Supermicro

Hardware Availability: Nov-2011

Tested by: Supermicro

Software Availability: Dec-2011

Peak Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
    -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
  -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
  -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
  -OPT:unroll_times_max=8 -OPT:unroll_size=256
  -OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
  -IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
  -CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
  -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
  -CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
  -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
  -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
  -fno-emit-exceptions -m32 -OPT:unroll_times_max=8
  -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
  -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
  -TENV:frame_pointer=off

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
  -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
  -OPT:fold_unsigned_relops=on -fno-exceptions -m32
  -HP:bdt=2m:heap=2m -WOPT:sib=on

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TC-HTRF4
(H8DCT-HLN4F, AMD Opteron 4280)

SPECfp_rate2006 = 200

SPECfp_rate_base2006 = 185

CPU2006 license: 001176

Test date: Jan-2012

Test sponsor: Supermicro

Hardware Availability: Nov-2011

Tested by: Supermicro

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

```
453.povray: -march=bdver1 -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
             -INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
             -OPT:alias=disjoint -WOPT:aggcm=0
```

Fortran benchmarks:

```
410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
             -LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
             -LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
             -WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on
```

```
416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
             -LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
             -OPT:unroll_times_max=2 -CG:local_sched_alg=1
             -HP:bdt=2m:heap=2m -WOPT:sib=on
```

```
434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
             -HP:bdt=2m:heap=2m
```

```
437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
               -LNO:fusion=2 -HP:bdt=2m:heap=2m -mso
```

```
459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
                -CG:load_exe=0 -CG:local_sched_alg=2 -HP
```

```
465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
             -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
             -HP:bdt=2m:heap=2m
```

Benchmarks using both Fortran and C:

```
435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
              -HP:bdt=2m:heap=2m
```

```
436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
                 -fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
                 -LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
                 -WOPT:sib=on
```

```
454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
               -GRA:optimize_boundary=on -HP:bdt=2m:heap=2m
```

```
481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
           -IPA:callee_limit=5000 -GRA:prioritize_by_density=on
           -CG:load_exe=1 -HP -WOPT:sib=on
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TC-HTRF4
(H8DCT-HLN4F, AMD Opteron 4280)

SPECfp_rate2006 = 200

SPECfp_rate_base2006 = 185

CPU2006 license: 001176

Test date: Jan-2012

Test sponsor: Supermicro

Hardware Availability: Nov-2011

Tested by: Supermicro

Software Availability: Dec-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.html>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 07:53:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 April 2012.