SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1017GR-TRF (X9SRG-F, Intel E5-1650)

SPECfp®_rate2006 = 217

SPECfp_rate_base2006 = 212

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

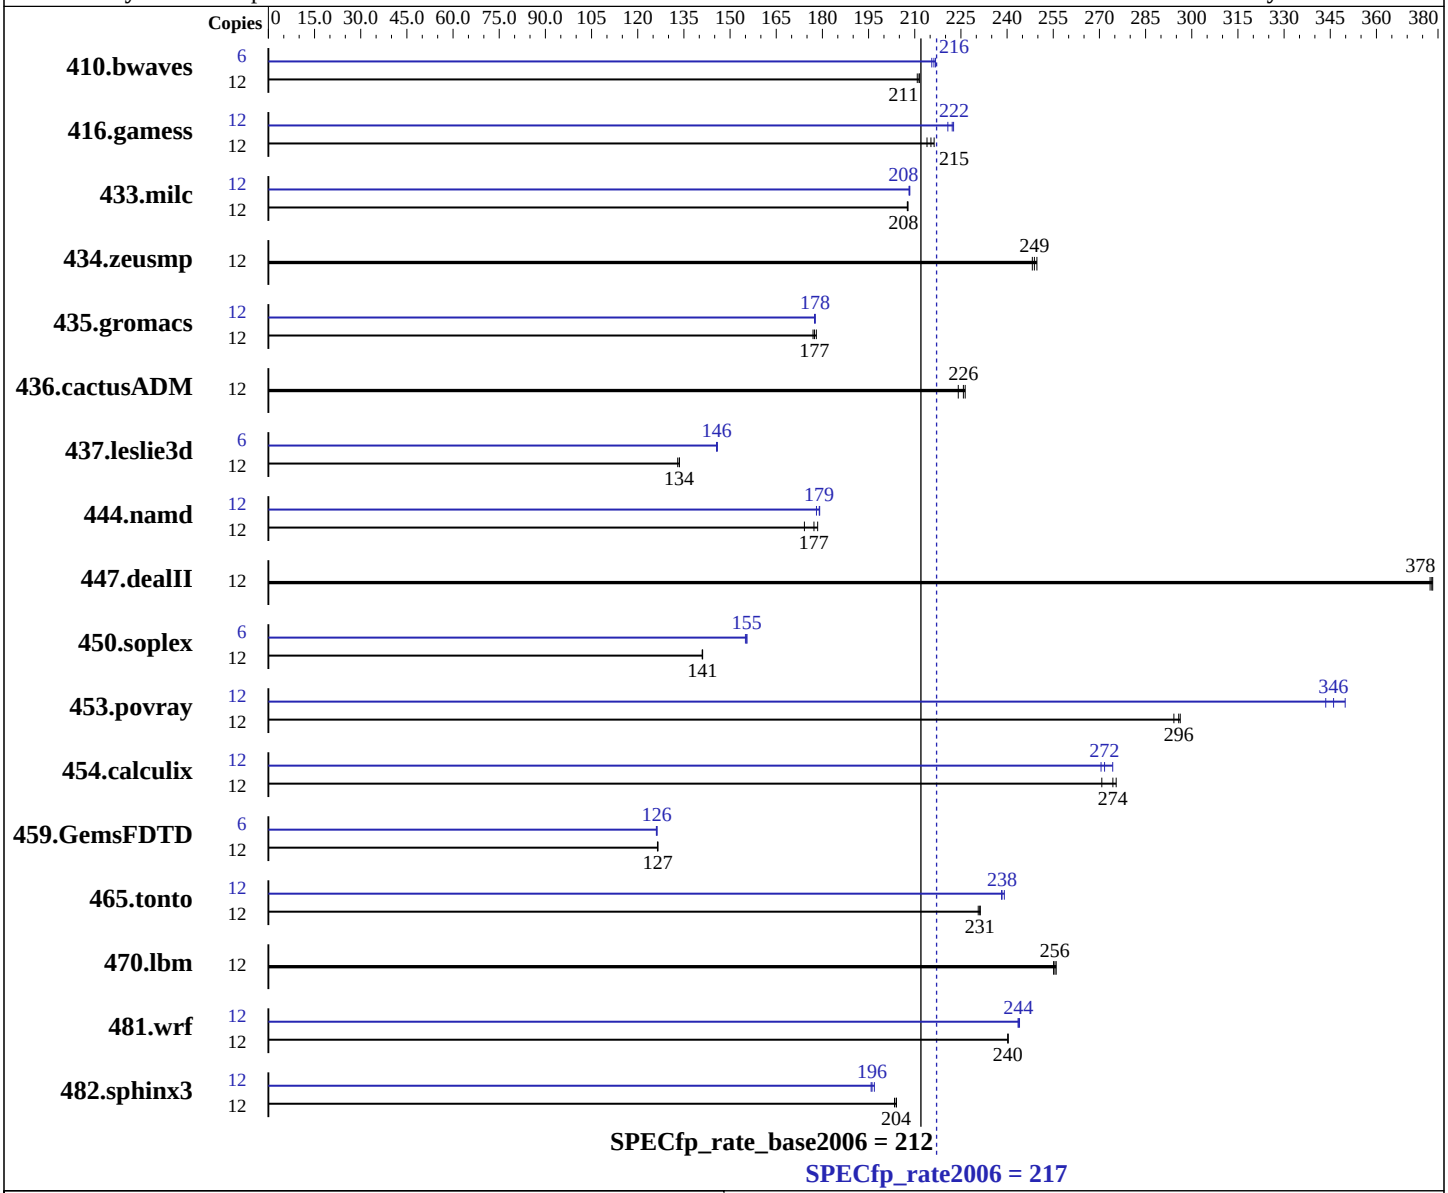

Hardware

CPU Name:	Intel Xeon E5-1650
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1017GR-TRF (X9SRG-F, Intel E5-1650)

SPECfp_rate2006 = 217

SPECfp_rate_base2006 = 212

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 160 GB SATA II, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	**771**	**211**	771	211	774	211	6	378	216	376	217	**377**	**216**
416.gamess	12	1098	214	**1092**	**215**	1086	216	12	**1058**	**222**	1055	223	1064	221
433.milc	12	530	208	531	208	**530**	**208**	12	**529**	**208**	529	208	529	208
434.zeusmp	12	437	250	**439**	**249**	440	248	12	437	250	**439**	**249**	440	248
435.gromacs	12	**483**	**177**	484	177	481	178	12	482	178	483	177	**482**	**178**
436.cactusADM	12	633	226	**635**	**226**	640	224	12	633	226	**635**	**226**	640	224
437.leslie3d	12	**845**	**134**	845	134	848	133	6	387	146	387	146	**387**	**146**
444.namd	12	**543**	**177**	539	178	553	174	12	**538**	**179**	537	179	540	178
447.dealII	12	363	378	364	377	**363**	**378**	12	363	378	364	377	**363**	**378**
450.soplex	12	710	141	**710**	**141**	709	141	6	**322**	**155**	323	155	322	155
453.povray	12	217	294	215	296	**216**	**296**	12	182	350	**184**	**346**	186	344
454.calculix	12	366	271	359	275	**361**	**274**	12	366	271	361	274	**364**	**272**
459.GemsFDTD	12	1006	127	**1006**	**127**	1007	126	6	505	126	504	126	**504**	**126**
465.tonto	12	**511**	**231**	510	231	512	231	12	494	239	**495**	**238**	496	238
470.lbm	12	644	256	646	255	**645**	**256**	12	644	256	646	255	**645**	**256**
481.wrf	12	558	240	**558**	**240**	558	240	12	550	244	**550**	**244**	549	244
482.sphinx3	12	1150	203	**1147**	**204**	1146	204	12	1188	197	1194	196	**1193**	**196**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on 103-69.inet Sat Mar 31 09:09:18 2012
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-1650 0 @ 3.20GHz
      1 "physical id"s (chips)
      12 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
      physical 0: cores 0 1 2 3 4 5
   cache size : 12288 KB

From /proc/meminfo
   MemTotal:       65946132 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux 103-69.inet 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 30 22:56

SPEC is set to: /home/cpu2006
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/vg_10369-lv_home
                  ext4    116G   15G   95G  14% /home

Additional information from dmidecode:
  Memory:
   8x Hynix Semiconducto HMT31GR7CFR4C 8 GB 1600 MHz 1 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
 Transparent Huge Pages disabled with:
 echo never  > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
     410.bwaves: -DSPEC_CPU_LP64
     416.gamess: -DSPEC_CPU_LP64
       433.milc: -DSPEC_CPU_LP64
     434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
     437.leslie3d: -DSPEC_CPU_LP64
       444.namd: -DSPEC_CPU_LP64
      447.dealII: -DSPEC_CPU_LP64
      450.soplex: -DSPEC_CPU_LP64
      453.povray: -DSPEC_CPU_LP64
     454.calculix: -DSPEC_CPU_LP64 -nofor_main
  459.GemsFDTD: -DSPEC_CPU_LP64
        465.tonto: -DSPEC_CPU_LP64
         470.lbm: -DSPEC_CPU_LP64
         481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
     482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
465.tonto: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:09:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2012.