SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-8027R-7RFT+ (X9QR7-TF+, Intel E5-4650)

SPECint®2006 =	45.9
SPECint_base2006 =	42.1

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

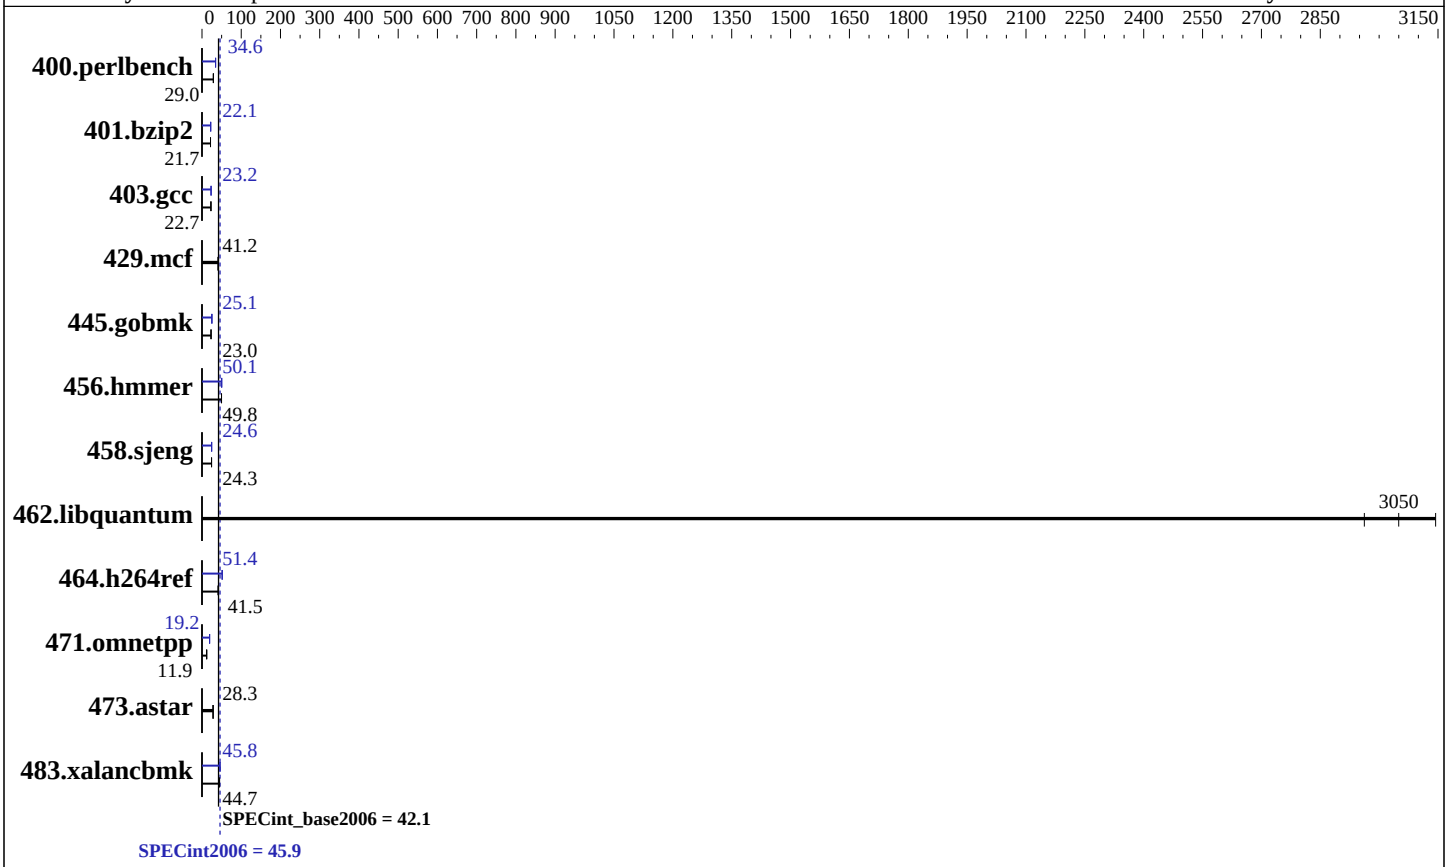

Hardware

CPU Name:	Intel Xeon E5-4650
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 500 GB SAS, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-8027R-7RFT+ (X9QR7-TF+, Intel E5-4650)

SPECint2006 = 45.9

SPECint_base2006 = 42.1

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	336	29.1	**337**	**29.0**	338	28.9	282	34.7	283	34.5	**282**	**34.6**
401.bzip2	**445**	**21.7**	445	21.7	445	21.7	436	22.1	**436**	**22.1**	436	22.1
403.gcc	354	22.7	**354**	**22.7**	354	22.8	**348**	**23.2**	348	23.2	348	23.1
429.mcf	**221**	**41.2**	221	41.2	221	41.3	**221**	**41.2**	221	41.2	221	41.3
445.gobmk	**455**	**23.0**	455	23.0	455	23.0	417	25.2	**417**	**25.1**	417	25.1
456.hmmer	187	49.8	188	49.7	**188**	**49.8**	186	50.1	186	50.2	**186**	**50.1**
458.sjeng	497	24.3	498	24.3	**497**	**24.3**	492	24.6	493	24.5	**493**	**24.6**
462.libquantum	6.99	2960	6.59	3140	**6.79**	**3050**	6.99	2960	6.59	3140	**6.79**	**3050**
464.h264ref	532	41.6	**534**	**41.5**	538	41.1	**430**	**51.4**	431	51.3	429	51.6
471.omnetpp	**524**	**11.9**	546	11.4	510	12.3	326	19.2	318	19.7	**325**	**19.2**
473.astar	248	28.2	248	28.3	**248**	**28.3**	248	28.2	248	28.3	**248**	**28.3**
483.xalancbmk	155	44.5	**155**	**44.7**	154	44.8	151	45.8	151	45.8	**151**	**45.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006v120/libs/32:/home/cpu2006v120/libs/64"
OMP_NUM_THREADS = "32"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
```

Base Compiler Invocation

C benchmarks:

```
icc  -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/smartheap -lsmartheap

Continued on next page

Peak Optimization Flags (Continued)

473.astar: `basepeak = yes`

483.xalancbmk: `-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/smartheap -lsmartheap`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:27:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 June 2012.