



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G7  
(2.00 GHz, Intel Xeon E7-4850)

**SPECint\_rate2006 = 908**

**SPECint\_rate\_base2006 = 864**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Apr-2012

**Hardware Availability:** Apr-2011

**Software Availability:** Dec-2011

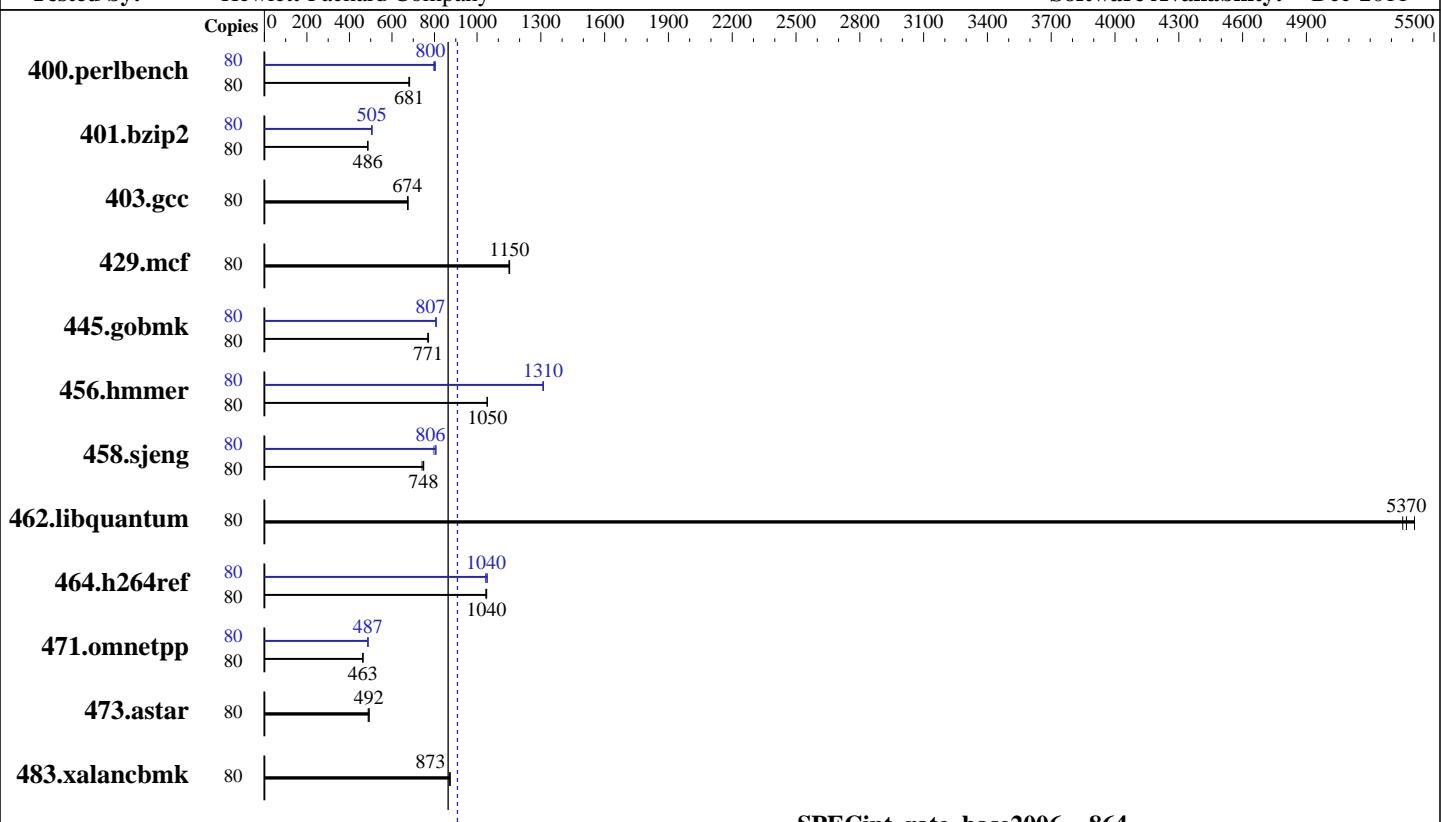

**SPECint\_rate\_base2006 = 864**

**SPECint\_rate2006 = 908**

### Hardware

CPU Name: Intel Xeon E7-4850  
CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 24 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 4 x 146 GB 15 K SAS, RAID 0  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, (Santiago)  
Compiler: Kernel 2.6.32-220.el6.x86\_64  
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G7  
(2.00 GHz, Intel Xeon E7-4850)

**SPECint\_rate2006 = 908**

**SPECint\_rate\_base2006 = 864**

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

## Results Table

| Benchmark      | Base   |             |             |             |             |            |             | Peak   |            |             |             |             |             |             |
|----------------|--------|-------------|-------------|-------------|-------------|------------|-------------|--------|------------|-------------|-------------|-------------|-------------|-------------|
|                | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds    | Ratio       | Copies | Seconds    | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       |
| 400.perlbench  | 80     | 1144        | 683         | <b>1148</b> | <b>681</b>  | 1150       | 680         | 80     | 972        | 804         | 981         | 797         | <b>977</b>  | <b>800</b>  |
| 401.bzip2      | 80     | <b>1587</b> | <b>486</b>  | 1589        | 486         | 1586       | 487         | 80     | 1526       | 506         | <b>1528</b> | <b>505</b>  | 1528        | 505         |
| 403.gcc        | 80     | 953         | 676         | 957         | 673         | <b>956</b> | <b>674</b>  | 80     | 953        | 676         | 957         | 673         | <b>956</b>  | <b>674</b>  |
| 429.mcf        | 80     | <b>633</b>  | <b>1150</b> | 634         | 1150        | 633        | 1150        | 80     | <b>633</b> | <b>1150</b> | 634         | 1150        | 633         | 1150        |
| 445.gobmk      | 80     | 1092        | 768         | <b>1089</b> | <b>771</b>  | 1087       | 772         | 80     | 1040       | 807         | 1040        | 807         | <b>1040</b> | <b>807</b>  |
| 456.hammer     | 80     | 713         | 1050        | 712         | 1050        | <b>712</b> | <b>1050</b> | 80     | 569        | 1310        | <b>569</b>  | <b>1310</b> | 569         | 1310        |
| 458.sjeng      | 80     | 1306        | 741         | <b>1294</b> | <b>748</b>  | 1292       | 749         | 80     | 1200       | 806         | 1214        | 798         | <b>1201</b> | <b>806</b>  |
| 462.libquantum | 80     | 306         | 5410        | 310         | 5350        | <b>309</b> | <b>5370</b> | 80     | 306        | 5410        | 310         | 5350        | <b>309</b>  | <b>5370</b> |
| 464.h264ref    | 80     | 1700        | 1040        | <b>1695</b> | <b>1040</b> | 1694       | 1050        | 80     | 1700       | 1040        | 1689        | 1050        | <b>1698</b> | <b>1040</b> |
| 471.omnetpp    | 80     | <b>1079</b> | <b>463</b>  | 1082        | 462         | 1078       | 464         | 80     | 1028       | 486         | <b>1027</b> | <b>487</b>  | 1025        | 488         |
| 473.astar      | 80     | 1151        | 488         | <b>1142</b> | <b>492</b>  | 1140       | 493         | 80     | 1151       | 488         | <b>1142</b> | <b>492</b>  | 1140        | 493         |
| 483.xalancbmk  | 80     | <b>632</b>  | <b>873</b>  | 634         | 871         | 632        | 873         | 80     | <b>632</b> | <b>873</b>  | 634         | 871         | 632         | 873         |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling  
Collaborative Power Control set to Disabled  
Sysinfo program /cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on dl580g7-da Thu Apr 26 05:28:52 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G7  
(2.00 GHz, Intel Xeon E7-4850)

**SPECint\_rate2006 = 908**

**SPECint\_rate\_base2006 = 864**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Apr-2012

**Hardware Availability:** Apr-2011

**Software Availability:** Dec-2011

## Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7- 4850 @ 2.00GHz
        4 "physical id"s (chips)
        80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings   : 20
    physical 0: cores 0 1 2 8 9 16 17 18 24 25
    physical 1: cores 0 1 2 8 9 16 17 18 24 25
    physical 2: cores 0 1 2 8 9 16 17 18 24 25
    physical 3: cores 0 1 2 8 9 16 17 18 24 25
cache size : 24576 KB
```

```
From /proc/meminfo
MemTotal:      529265536 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux dl580g7-da 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 26 05:25
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  537G  6.5G  503G  2%  /
```

```
Additional information from dmidecode:
```

```
BIOS HP P65 05/23/2011
Memory:
 32x Not Specified Not Specified 16 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/lib32:/cpu2006/lib64"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G7  
(2.00 GHz, Intel Xeon E7-4850)

**SPECint\_rate2006 = 908**

**SPECint\_rate\_base2006 = 864**

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

## Base Compiler Invocation

C benchmarks:

    icc -m32

C++ benchmarks:

    icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

    -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

    -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
    -Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

    icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G7  
(2.00 GHz, Intel Xeon E7-4850)

**SPECint\_rate2006 = 908**

**SPECint\_rate\_base2006 = 864**

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

## Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G7  
(2.00 GHz, Intel Xeon E7-4850)

**SPECint\_rate2006 = 908**

**SPECint\_rate\_base2006 = 864**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Apr-2012

**Hardware Availability:** Apr-2011

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/smarterheap -lsmarterheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:09:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 May 2012.