



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23  
(Intel Xeon E5-2648L, 1.80 GHz)

SPECfp®2006 = **59.7**

SPECfp\_base2006 = **56.3**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2012

Hardware Availability: Apr-2012

Software Availability: Dec-2011

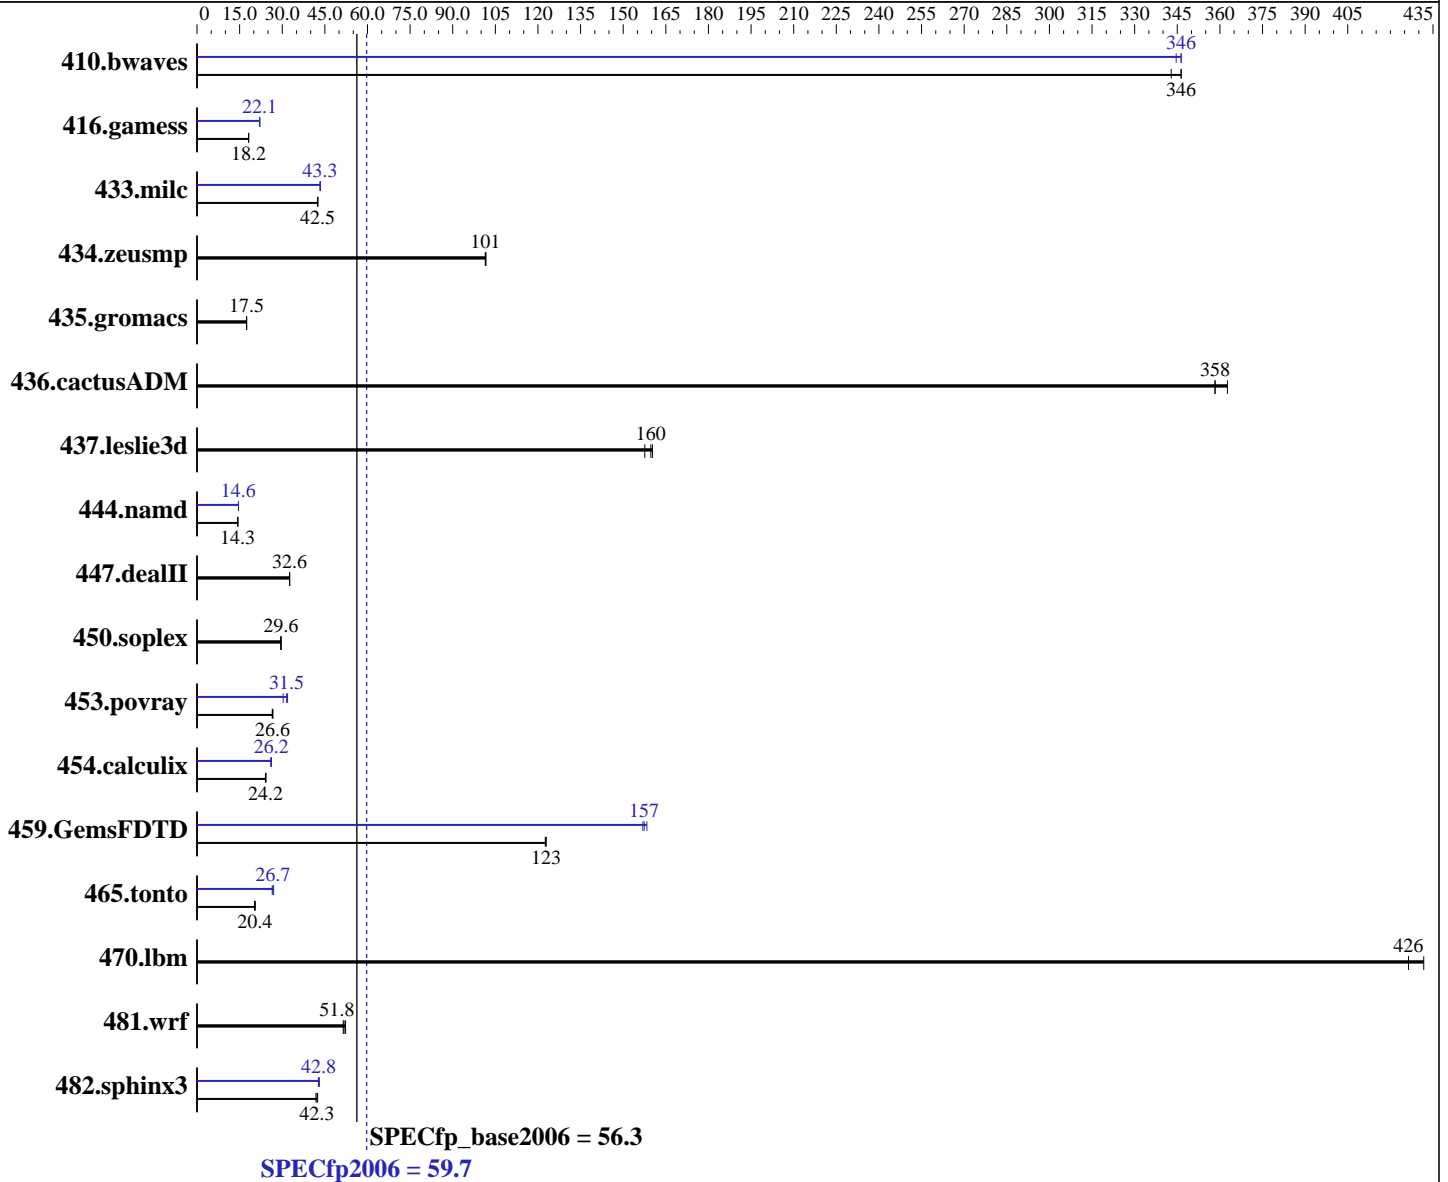

### Hardware

CPU Name: Intel Xeon E5-2648L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23  
(Intel Xeon E5-2648L, 1.80 GHz)

SPECfp2006 = **59.7**

SPECfp\_base2006 = **56.3**

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: May-2012  
Hardware Availability: Apr-2012  
Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>39.2</u></b>	<b><u>346</u></b>	39.6	343	39.2	346	39.4	345	<b><u>39.2</u></b>	<b><u>346</u></b>	39.2	346
416.gamess	<b><u>1078</u></b>	<b><u>18.2</u></b>	1078	18.2	1078	18.2	<b><u>887</u></b>	<b><u>22.1</u></b>	888	22.0	886	22.1
433.milc	216	42.5	216	42.5	<b><u>216</u></b>	<b><u>42.5</u></b>	<b><u>212</u></b>	<b><u>43.3</u></b>	212	43.3	211	43.4
434.zeusmp	89.5	102	89.7	101	<b><u>89.7</u></b>	<b><u>101</u></b>	89.5	102	89.7	101	<b><u>89.7</u></b>	<b><u>101</u></b>
435.gromacs	409	17.4	<b><u>409</u></b>	<b><u>17.5</u></b>	409	17.5	409	17.4	<b><u>409</u></b>	<b><u>17.5</u></b>	409	17.5
436.cactusADM	33.4	358	33.0	363	<b><u>33.4</u></b>	<b><u>358</u></b>	33.4	358	33.0	363	<b><u>33.4</u></b>	<b><u>358</u></b>
437.leslie3d	58.6	160	<b><u>58.8</u></b>	<b><u>160</u></b>	59.6	158	58.6	160	<b><u>58.8</u></b>	<b><u>160</u></b>	59.6	158
444.namd	<b><u>559</u></b>	<b><u>14.3</u></b>	559	14.4	559	14.3	550	14.6	<b><u>549</u></b>	<b><u>14.6</u></b>	549	14.6
447.dealII	351	32.6	<b><u>351</u></b>	<b><u>32.6</u></b>	351	32.6	351	32.6	<b><u>351</u></b>	<b><u>32.6</u></b>	351	32.6
450.soplex	283	29.5	<b><u>282</u></b>	<b><u>29.6</u></b>	282	29.6	283	29.5	<b><u>282</u></b>	<b><u>29.6</u></b>	282	29.6
453.povray	<b><u>200</u></b>	<b><u>26.6</u></b>	201	26.5	199	26.7	<b><u>169</u></b>	<b><u>31.5</u></b>	167	31.9	175	30.3
454.calculix	342	24.1	<b><u>341</u></b>	<b><u>24.2</u></b>	340	24.3	<b><u>315</u></b>	<b><u>26.2</u></b>	315	26.2	317	26.0
459.GemsFDTD	<b><u>86.4</u></b>	<b><u>123</u></b>	86.6	123	86.4	123	<b><u>67.4</u></b>	<b><u>157</u></b>	67.6	157	67.0	158
465.tonto	486	20.3	<b><u>481</u></b>	<b><u>20.4</u></b>	481	20.5	<b><u>368</u></b>	<b><u>26.7</u></b>	365	27.0	372	26.5
470.lbm	<b><u>32.2</u></b>	<b><u>426</u></b>	32.2	426	31.8	432	<b><u>32.2</u></b>	<b><u>426</u></b>	32.2	426	31.8	432
481.wrf	214	52.3	<b><u>216</u></b>	<b><u>51.8</u></b>	217	51.5	214	52.3	<b><u>216</u></b>	<b><u>51.8</u></b>	217	51.5
482.sphinx3	459	42.5	466	41.9	<b><u>461</u></b>	<b><u>42.3</u></b>	456	42.7	453	43.1	<b><u>456</u></b>	<b><u>42.8</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on tigershark-pete Thu May 10 17:48:20 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23  
(Intel Xeon E5-2648L, 1.80 GHz)

SPECfp2006 = 59.7

SPECfp\_base2006 = 56.3

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: May-2012  
Hardware Availability: Apr-2012  
Software Availability: Dec-2011

### Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E5-2648L 0 @ 1.80GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132135800 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux tigershark-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST
2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 8 10:31
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_tigersharkpet-lv_root
                ext4      265G   67G  186G   27% /
```

```
Additional information from dmidecode:
Memory:
 9x Micron 36JDYS1G72PZ-1G6M1 8 GB 1600 MHz 2 rank
 7x Samsung M392B1K70DM0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"  
OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23  
(Intel Xeon E5-2648L, 1.80 GHz)

**SPECfp2006 = 59.7**

**SPECfp\_base2006 = 56.3**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2012  
**Hardware Availability:** Apr-2012  
**Software Availability:** Dec-2011

## General Notes (Continued)

memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23  
(Intel Xeon E5-2648L, 1.80 GHz)

**SPECfp2006 = 59.7**

**SPECfp\_base2006 = 56.3**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** May-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23  
(Intel Xeon E5-2648L, 1.80 GHz)

**SPECfp2006 = 59.7**

**SPECfp\_base2006 = 56.3**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** May-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23  
(Intel Xeon E5-2648L, 1.80 GHz)

**SPECfp2006 = 59.7**

**SPECfp\_base2006 = 56.3**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2012  
**Hardware Availability:** Apr-2012  
**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 06:19:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 June 2012.