SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x240
(Intel Xeon E5-2665, 2.40 GHz)

SPECfp®_rate2006 = 469

SPECfp_rate_base2006 = 455

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

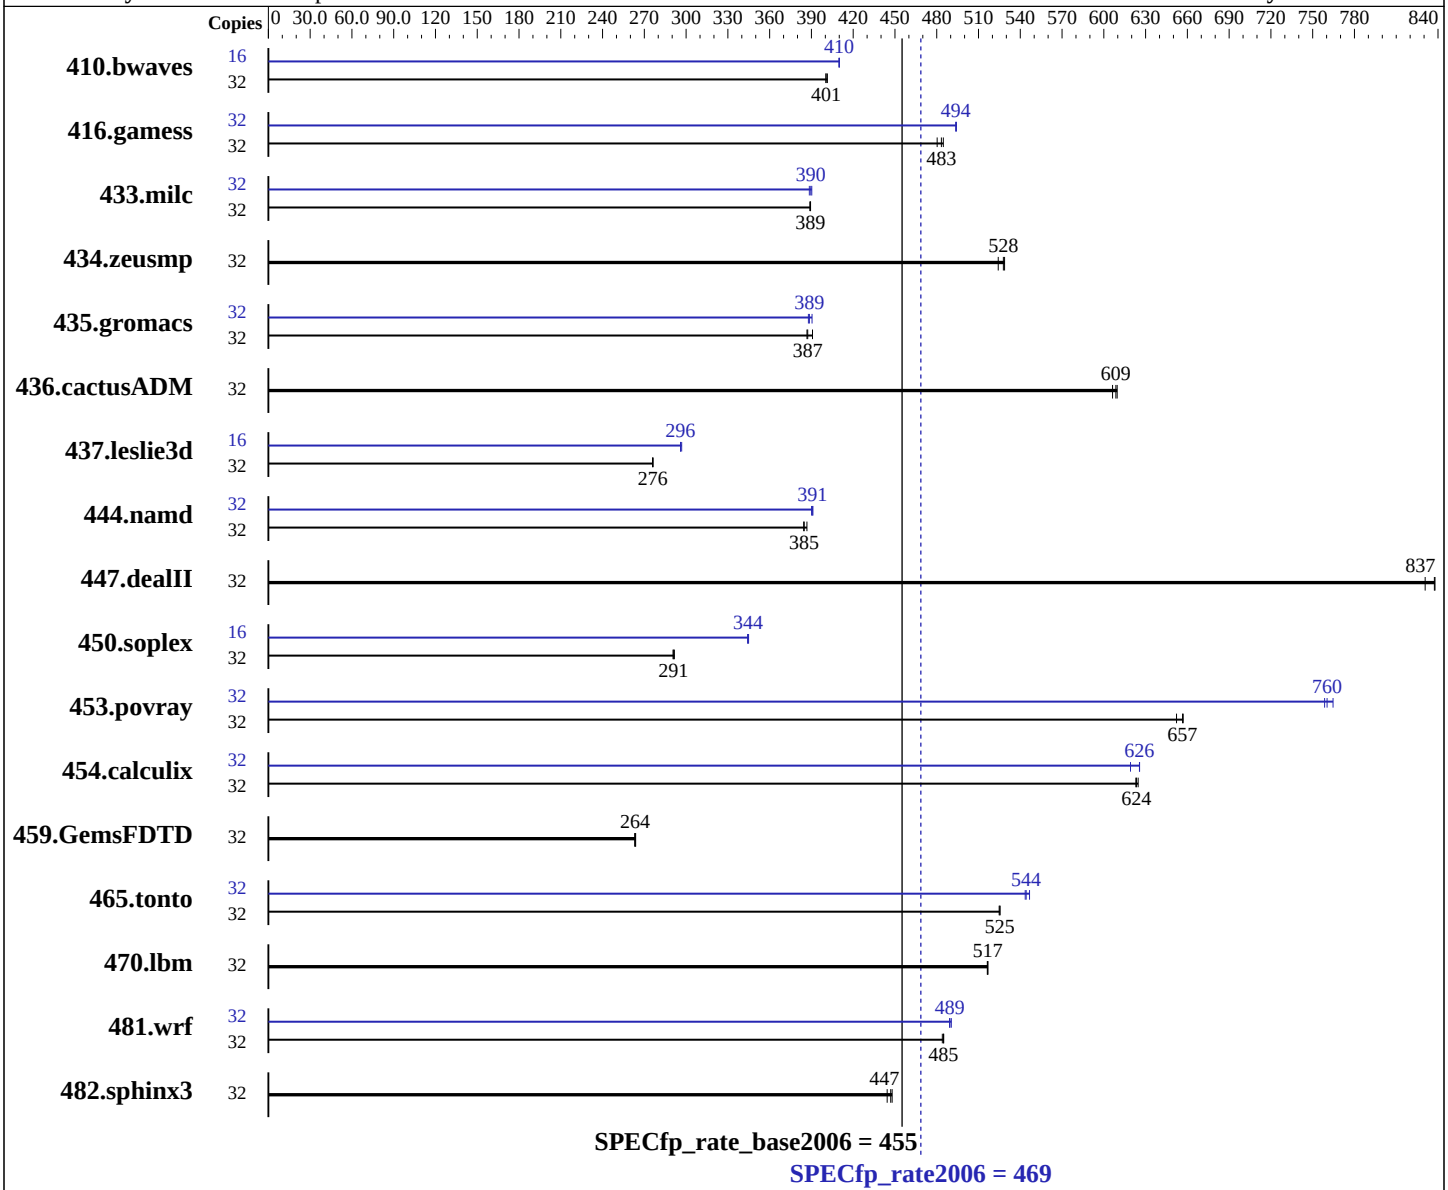

Hardware

CPU Name:	Intel Xeon E5-2665
CPU Characteristics:	Intel Turbo Boost Technology up to 3.10 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x240
(Intel Xeon E5-2665, 2.40 GHz)

SPECfp_rate2006 = 469

SPECfp_rate_base2006 = 455

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1086	400	**1086**	**401**	1083	401	16	**530**	**410**	531	410	530	410
416.gamess	32	1293	485	1305	480	**1296**	**483**	32	**1269**	**494**	1269	494	1268	494
433.milc	32	754	389	**755**	**389**	755	389	32	**754**	**390**	753	390	756	389
434.zeusmp	32	556	524	551	529	**552**	**528**	32	556	524	551	529	**552**	**528**
435.gromacs	32	**590**	**387**	591	387	585	391	32	585	390	**588**	**389**	589	388
436.cactusADM	32	627	610	**628**	**609**	631	606	32	627	610	**628**	**609**	631	606
437.leslie3d	32	**1089**	**276**	1090	276	1089	276	16	507	297	508	296	**508**	**296**
444.namd	32	664	387	**667**	**385**	668	384	32	**657**	**391**	658	390	656	391
447.dealII	32	437	838	**437**	**837**	441	831	32	437	838	**437**	**837**	441	831
450.soplex	32	915	292	918	291	**917**	**291**	16	**387**	**344**	387	345	388	344
453.povray	32	261	652	**259**	**657**	259	657	32	224	759	223	765	**224**	**760**
454.calculix	32	**423**	**624**	424	623	423	625	32	422	626	426	619	**422**	**626**
459.GemsFDTD	32	1287	264	**1288**	**264**	1291	263	32	1287	264	**1288**	**264**	1291	263
465.tonto	32	599	525	600	525	**599**	**525**	32	576	547	579	544	**579**	**544**
470.lbm	32	851	517	852	516	**851**	**517**	32	851	517	852	516	**851**	**517**
481.wrf	32	737	485	738	484	**737**	**485**	32	731	489	729	490	**730**	**489**
482.sphinx3	32	**1395**	**447**	1403	444	1392	448	32	**1395**	**447**	1403	444	1392	448

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Operating Mode set to Maximum Perfomance in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
```

Continued on next page

Platform Notes (Continued)

```
running on blacktip-pete Fri May 11 05:00:09 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Genuine Intel(R) CPU @ 2.40GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       132136204 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux blacktip-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 10 16:28

SPEC is set to: /cpu2006.1.2
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/vg_blacktippete-lv_root
                  ext4    265G  6.0G  246G   3% /

Additional information from dmidecode:
  Memory:
   4x Hynix HMT31GR7CFR4C-PB 8 GB 1600 MHz 2 rank
   12x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
     410.bwaves: -DSPEC_CPU_LP64
     416.gamess: -DSPEC_CPU_LP64
       433.milc: -DSPEC_CPU_LP64
     434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
     437.leslie3d: -DSPEC_CPU_LP64
       444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
      450.soplex: -DSPEC_CPU_LP64
      453.povray: -DSPEC_CPU_LP64
     454.calculix: -DSPEC_CPU_LP64 -nofor_main
  459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -static -auto-ilp32 -opt-mem-layout-trans=3`

436.cactusADM: `basepeak = yes`

454.calculix: `-xAVX -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3`

481.wrf: `Same as 454.calculix`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 05:50:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 June 2012.