SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2430, 2.50 GHz)

SPECfp®2006 = 63.0

SPECfp_base2006 = 60.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

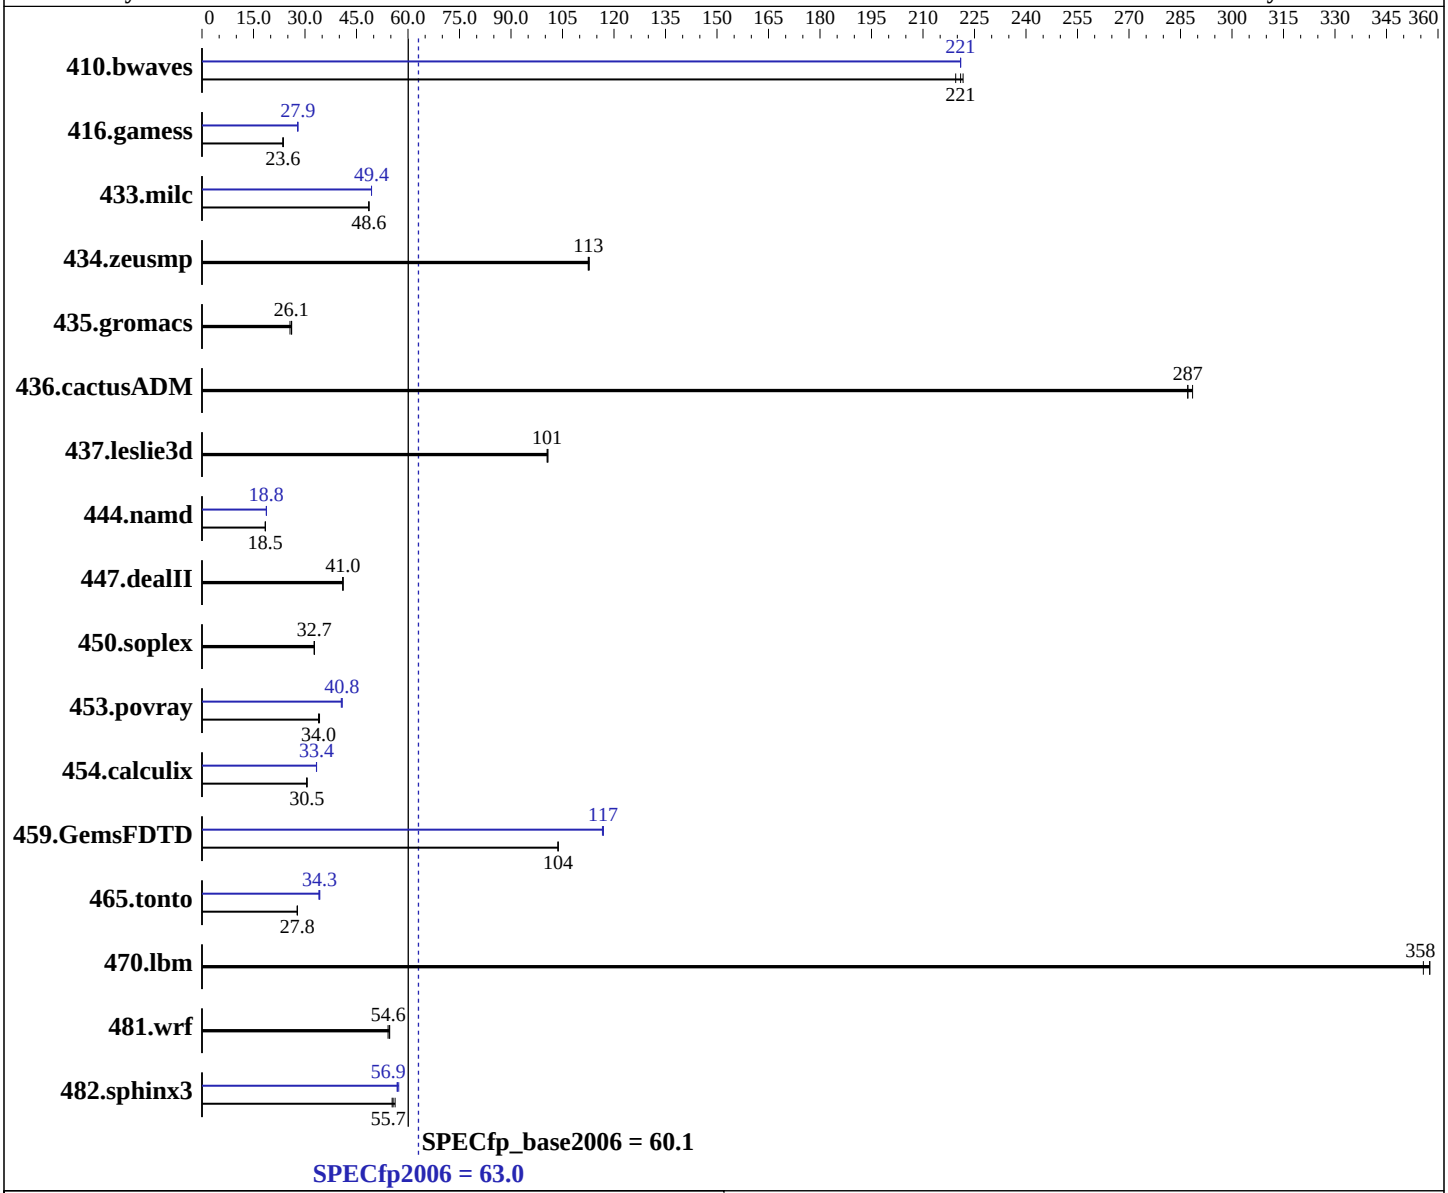

Hardware

CPU Name:	Intel Xeon E5-2430
CPU Characteristics:	Intel Turbo Boost Technology up to 2.70 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.27-default
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (add definition here)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2430, 2.50 GHz)

SPECfp2006 = 63.0

SPECfp_base2006 = 60.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem: 2 x 50 GB SATA SSD, RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	61.9	220	**61.5**	**221**	61.3	222	61.5	221	**61.5**	**221**	61.5	221
416.gamess	**830**	**23.6**	831	23.6	826	23.7	704	27.8	701	27.9	**701**	**27.9**
433.milc	189	48.6	189	48.6	**189**	**48.6**	186	49.4	186	49.4	**186**	**49.4**
434.zeusmp	80.9	113	**80.9**	**113**	80.7	113	80.9	113	**80.9**	**113**	80.7	113
435.gromacs	279	25.6	273	26.1	**274**	**26.1**	279	25.6	273	26.1	**274**	**26.1**
436.cactusADM	41.6	287	41.4	289	**41.6**	**287**	41.6	287	41.4	289	**41.6**	**287**
437.leslie3d	93.5	101	93.3	101	**93.5**	**101**	93.5	101	93.3	101	**93.5**	**101**
444.namd	**435**	**18.5**	435	18.5	435	18.4	428	18.8	427	18.8	**428**	**18.8**
447.dealII	278	41.1	279	41.0	**279**	**41.0**	278	41.1	279	41.0	**279**	**41.0**
450.soplex	255	32.8	**255**	**32.7**	255	32.7	255	32.8	**255**	**32.7**	255	32.7
453.povray	**156**	**34.0**	157	34.0	155	34.2	130	40.8	131	40.6	**130**	**40.8**
454.calculix	269	30.6	271	30.5	**270**	**30.5**	248	33.3	247	33.4	**247**	**33.4**
459.GemsFDTD	102	104	**102**	**104**	102	104	**90.8**	**117**	91.0	117	90.8	117
465.tonto	354	27.8	**354**	**27.8**	355	27.7	289	34.0	287	34.3	**287**	**34.3**
470.lbm	**38.4**	**358**	38.4	358	38.6	356	**38.4**	**358**	38.4	358	38.6	356
481.wrf	204	54.7	206	54.2	**205**	**54.6**	204	54.7	206	54.2	**205**	**54.6**
482.sphinx3	352	55.4	347	56.2	**350**	**55.7**	**342**	**56.9**	343	56.8	340	57.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost set to Enabled
C States/C1E set to Enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on linux-n2l2 Tue Mar 27 01:45:11 2012

This section contains SUT (System Under Test) info as seen by
```

Continued on next page

Platform Notes (Continued)

```
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2430 0 @ 2.20GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
      physical 0: cores 0 1 2 3 4 5
      physical 1: cores 0 1 2 3 4 5
   cache size : 15360 KB

From /proc/meminfo
   MemTotal:       49348648 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 11 (x86_64)
      VERSION = 11
      PATCHLEVEL = 2

uname -a:
   Linux linux-n2l2 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
   (d73692b) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 26 18:17 last=S

SPEC is set to: /root/CPU2006-1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      ext3   87G  9.4G   73G  12% /

Additional information from dmidecode:

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"
OMP_NUM_THREADS = "12"
```

Continued on next page

General Notes (Continued)

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages disabled with:
echo never  > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2430, 2.50 GHz)

SPECfp2006 = 63.0

SPECfp_base2006 = 60.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 05:24:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 June 2012.