



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp®\_rate2006 = 201**

NovaScale R430 F3 (Intel Xeon E5-2407, 2.20 GHz)

**SPECfp\_rate\_base2006 = 195**

CPU2006 license: 20


Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

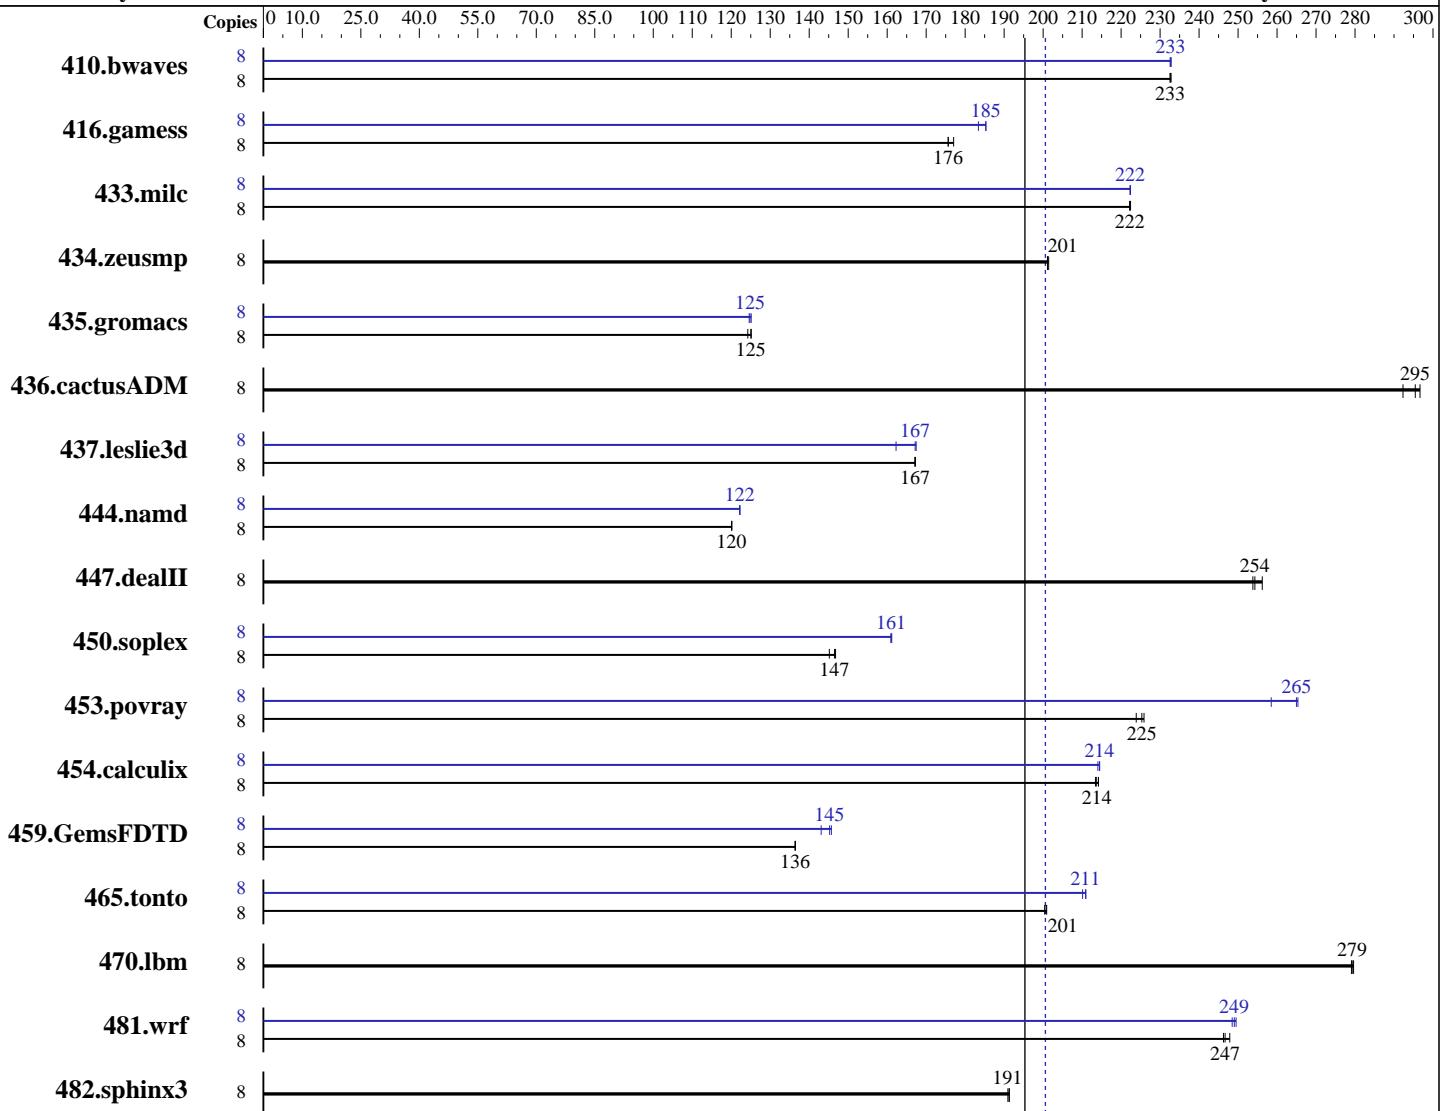

**SPECfp\_rate\_base2006 = 195**

**SPECfp\_rate2006 = 201**

## Hardware

CPU Name: Intel Xeon E5-2407  
CPU Characteristics:  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64)  
3.0.13-0.9-default  
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE  
for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran  
Studio XE for Linux  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (add definition here)  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp\_rate2006 = 201**

NovaScale R430 F3 (Intel Xeon E5-2407, 2.20 GHz)

**SPECfp\_rate\_base2006 = 195**

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)
Disk Subsystem:	2 x 600 GB 15000 RPM SAS, RAID 1
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	467	233	467	233	<b>467</b>	<b>233</b>	8	467	233	467	233	<b>467</b>	<b>233</b>
416.gamess	8	<b>892</b>	<b>176</b>	885	177	892	176	8	854	183	845	185	<b>845</b>	<b>185</b>
433.milc	8	<b>330</b>	<b>222</b>	330	222	330	222	8	<b>330</b>	<b>222</b>	330	222	330	222
434.zeusmp	8	<b>362</b>	<b>201</b>	362	201	361	201	8	<b>362</b>	<b>201</b>	362	201	361	201
435.gromacs	8	456	125	<b>457</b>	<b>125</b>	460	124	8	<b>458</b>	<b>125</b>	458	125	456	125
436.cactusADM	8	327	292	<b>324</b>	<b>295</b>	322	297	8	327	292	<b>324</b>	<b>295</b>	322	297
437.leslie3d	8	450	167	450	167	<b>450</b>	<b>167</b>	8	<b>450</b>	<b>167</b>	463	162	449	167
444.namd	8	534	120	534	120	<b>534</b>	<b>120</b>	8	<b>525</b>	<b>122</b>	525	122	525	122
447.dealII	8	357	256	361	254	<b>360</b>	<b>254</b>	8	357	256	361	254	<b>360</b>	<b>254</b>
450.soplex	8	460	145	455	147	<b>455</b>	<b>147</b>	8	414	161	414	161	<b>414</b>	<b>161</b>
453.povray	8	188	226	190	224	<b>189</b>	<b>225</b>	8	<b>161</b>	<b>265</b>	165	259	160	265
454.calculix	8	<b>309</b>	<b>214</b>	308	214	309	213	8	<b>308</b>	<b>214</b>	308	215	308	214
459.GemsFDTD	8	622	136	<b>622</b>	<b>136</b>	622	136	8	<b>584</b>	<b>145</b>	583	146	593	143
465.tonto	8	<b>392</b>	<b>201</b>	392	201	393	200	8	<b>373</b>	<b>211</b>	375	210	373	211
470.lbm	8	393	280	<b>394</b>	<b>279</b>	394	279	8	393	280	<b>394</b>	<b>279</b>	394	279
481.wrf	8	360	248	<b>362</b>	<b>247</b>	363	246	8	360	248	<b>359</b>	<b>249</b>	358	249
482.sphinx3	8	815	191	<b>815</b>	<b>191</b>	817	191	8	815	191	<b>815</b>	<b>191</b>	817	191

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost set to Enabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp\_rate2006 = 201**

NovaScale R430 F3 (Intel Xeon E5-2407, 2.20 GHz)

**SPECfp\_rate\_base2006 = 195**

**CPU2006 license:** 20

**Test date:** Feb-2012

**Test sponsor:** Bull SAS

**Hardware Availability:** May-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Platform Notes (Continued)

C States/C1E set to Enabled

Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on Slice Sun Feb 26 08:53:49 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2407 0 @ 2.20GHz  
2 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4  
siblings : 4  
physical 0: cores 0 1 2 3  
physical 1: cores 0 1 2 3  
cache size : 10240 KB

From /proc/meminfo

MemTotal: 49381468 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 11 (x86\_64)

From /etc/\*release\* /etc/\*version\*

SuSE-release:  
SUSE Linux Enterprise Server 11 (x86\_64)  
VERSION = 11  
PATCHLEVEL = 2

uname -a:

Linux Slice 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Feb 25 23:29 last=S

SPEC is set to: /root/CPU2006-1.2

Filesystem Type Size Used Avail Use% Mounted on  
/dev/sdal ext3 266G 19G 234G 8% /

Additional information from dmidecode:

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp\_rate2006 = 201**

NovaScale R430 F3 (Intel Xeon E5-2407, 2.20 GHz)

**SPECfp\_rate\_base2006 = 195**

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Dell PowerEdge R420 and

the Bull NovaScale R430 F3 models are electronically equivalent.

The results have been measured on a Dell PowerEdge R420 model

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
    444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
    465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R430 F3 (Intel Xeon E5-2407, 2.20 GHz)

**SPECfp\_rate2006 = 201**

**SPECfp\_rate\_base2006 = 195**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp\_rate2006 = 201**

NovaScale R430 F3 (Intel Xeon E5-2407, 2.20 GHz)

**SPECfp\_rate\_base2006 = 195**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Feb-2012

**Hardware Availability:** May-2012

**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
           -opt-mem-layout-trans=3

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static

```

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
           -inline-level=0 -scalar-rep- -static

```

434.zeusmp: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp\_rate2006 = 201**

NovaScale R430 F3 (Intel Xeon E5-2407, 2.20 GHz)

**SPECfp\_rate\_base2006 = 195**

**CPU2006 license:** 20

**Test date:** Feb-2012

**Test sponsor:** Bull SAS

**Hardware Availability:** May-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:55:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.