SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x220
(Intel Xeon E5-2420, 1.90 GHz)

SPECfp®_rate2006 = 292

SPECfp_rate_base2006 = 284

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

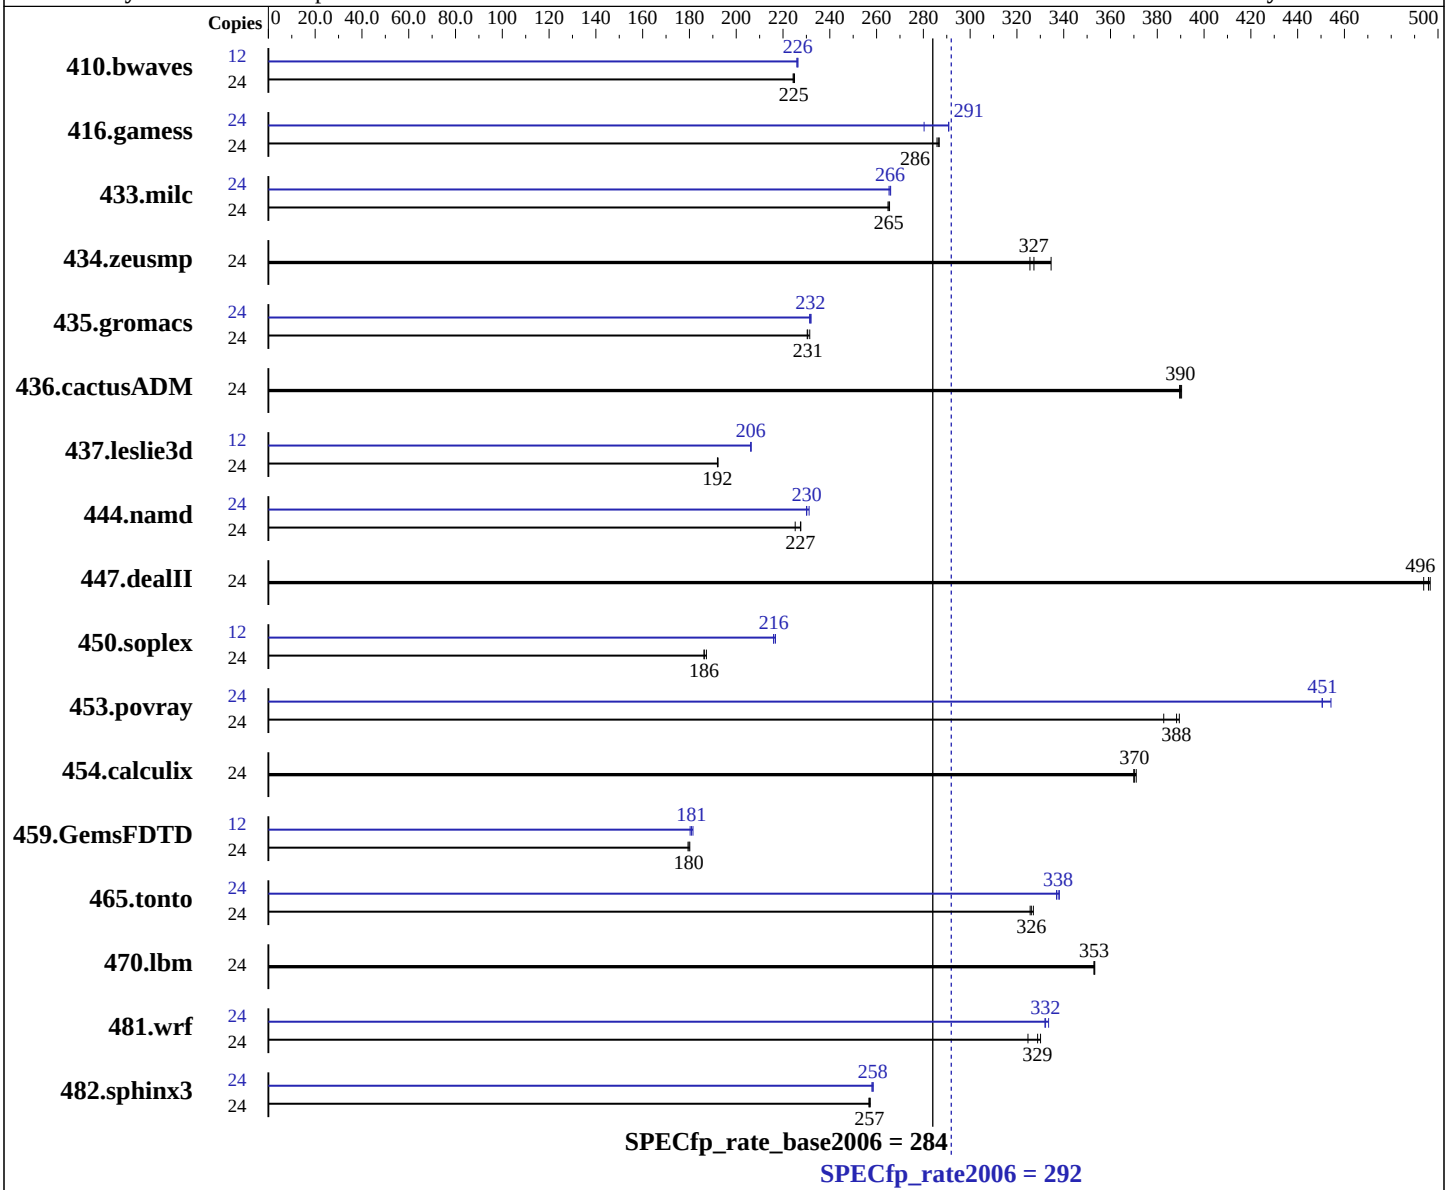

Hardware

CPU Name:	Intel Xeon E5-2420
CPU Characteristics:	Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x220
(Intel Xeon E5-2420, 1.90 GHz)

SPECfp_rate2006 = 292

SPECfp_rate_base2006 = 284

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem: 1 x 500 GB SAS, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	**1452**	**225**	1450	225	1454	224	12	**721**	**226**	722	226	721	226
416.gamess	24	1644	286	**1641**	**286**	1639	287	24	**1616**	**291**	1615	291	1676	280
433.milc	24	**831**	**265**	832	265	830	266	24	828	266	**829**	**266**	830	265
434.zeusmp	24	653	335	671	326	**667**	**327**	24	653	335	671	326	**667**	**327**
435.gromacs	24	740	231	744	230	**743**	**231**	24	741	231	739	232	**739**	**232**
436.cactusADM	24	736	390	735	390	**736**	**390**	24	736	390	735	390	**736**	**390**
437.leslie3d	24	**1175**	**192**	1175	192	1173	192	12	547	206	**547**	**206**	547	206
444.namd	24	855	225	**846**	**227**	846	228	24	833	231	**836**	**230**	837	230
447.dealII	24	**554**	**496**	556	494	553	497	24	**554**	**496**	556	494	553	497
450.soplex	24	1069	187	**1074**	**186**	1075	186	12	462	217	463	216	**463**	**216**
453.povray	24	334	383	328	389	**329**	**388**	24	**283**	**451**	281	454	283	450
454.calculix	24	534	371	535	370	**535**	**370**	24	534	371	535	370	**535**	**370**
459.GemsFDTD	24	1413	180	**1416**	**180**	1419	179	12	706	180	701	182	**704**	**181**
465.tonto	24	**724**	**326**	722	327	725	326	24	**699**	**338**	701	337	698	338
470.lbm	24	933	353	**934**	**353**	934	353	24	933	353	**934**	**353**	934	353
481.wrf	24	**815**	**329**	826	325	812	330	24	804	334	808	332	**807**	**332**
482.sphinx3	24	**1820**	**257**	1822	257	1818	257	24	1813	258	**1811**	**258**	1809	259

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Operating Mode set to Maximum Perfomance in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
```

Continued on next page

Platform Notes (Continued)

```
running on kestral-pete Sun Jun  3 12:01:11 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2420 0 @ 1.90GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
      physical 0: cores 0 1 2 3 4 5
      physical 1: cores 0 1 2 3 4 5
   cache size : 15360 KB

From /proc/meminfo
   MemTotal:       99043528 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux kestral-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 2 19:39

SPEC is set to: /cpu2006.1.2
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/vg_kestralpete-lv_root
                  ext4    449G  6.1G  420G   2% /

Additional information from dmidecode:
  Memory:
   12x Micron 36JSF1G72PZ-1G6M1 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
     410.bwaves: -DSPEC_CPU_LP64
     416.gamess: -DSPEC_CPU_LP64
       433.milc: -DSPEC_CPU_LP64
     434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
     437.leslie3d: -DSPEC_CPU_LP64
       444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
      450.soplex: -DSPEC_CPU_LP64
      453.povray: -DSPEC_CPU_LP64
     454.calculix: -DSPEC_CPU_LP64 -nofor_main
  459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
         470.lbm: -DSPEC_CPU_LP64
         481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
     482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:46:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 July 2012.