



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp®2006 = 79.3**

**Huawei RH2485 V2 (Intel Xeon E5-4650)**

**SPECfp\_base2006 = 75.2**

**CPU2006 license:** 3175


**Test date:** Jun-2012

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

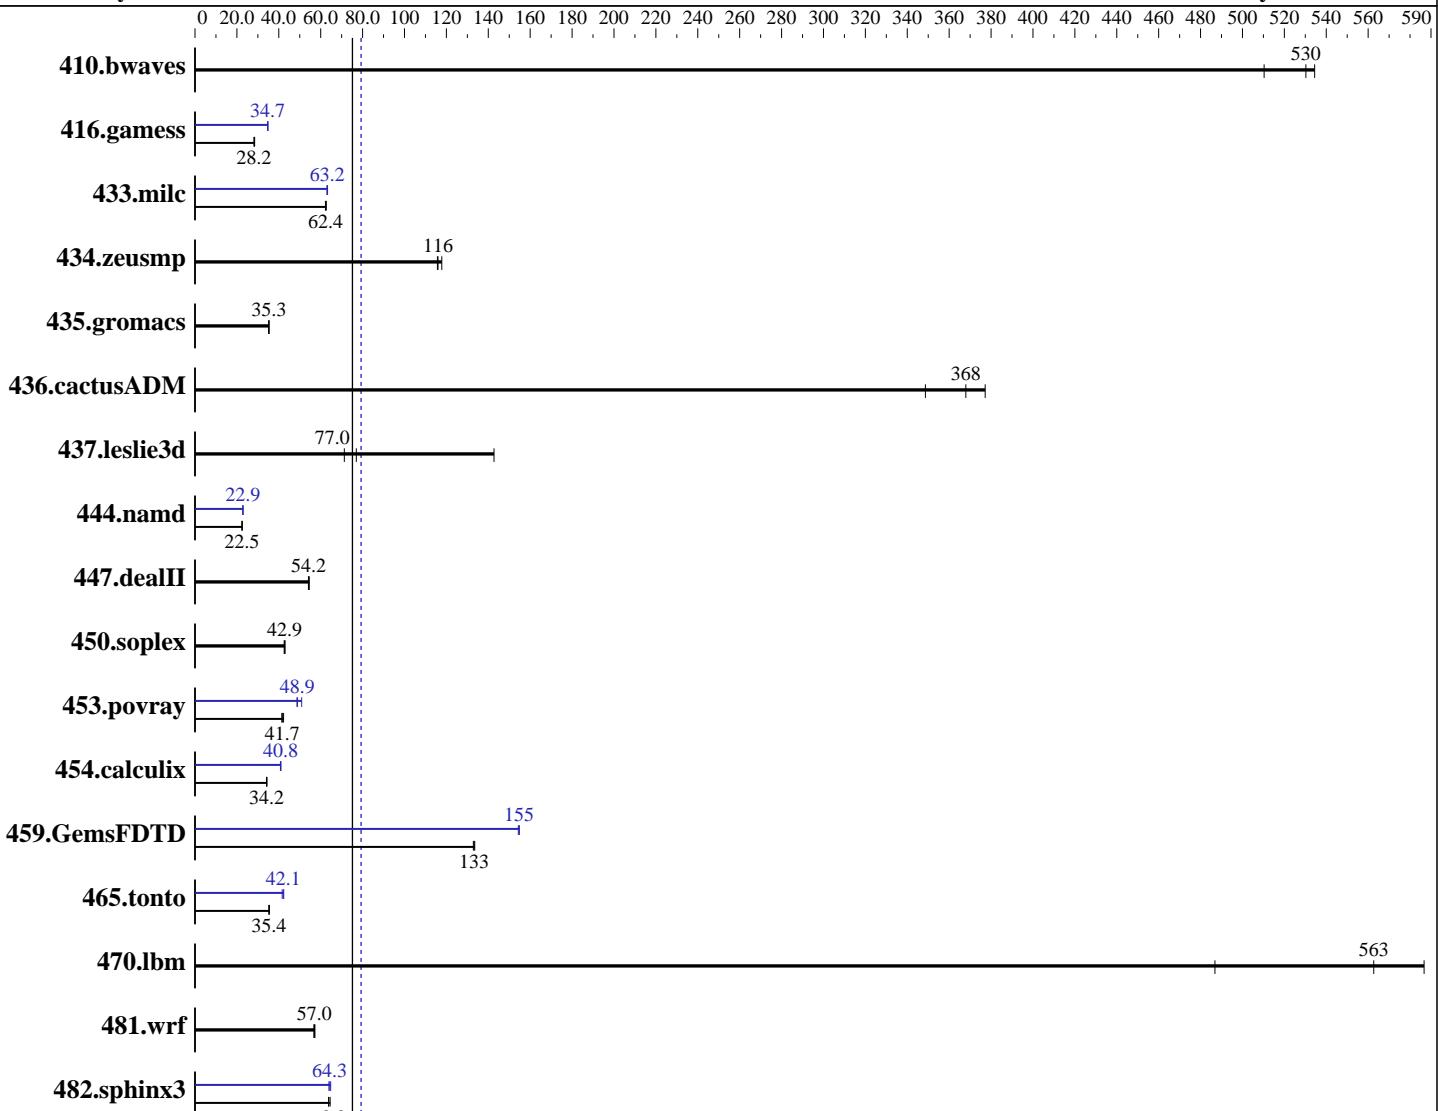

**SPECfp\_base2006 = 75.2**

**SPECfp2006 = 79.3**

## Hardware

CPU Name: Intel Xeon E5-4650  
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
CPU MHz: 2700  
FPU: Integrated  
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext3  
*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 79.3**

Huawei RH2485 V2 (Intel Xeon E5-4650)

**SPECfp\_base2006 = 75.2**

CPU2006 license: 3175

Test date: Jun-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<b>25.6</b>	<b>530</b>	25.4	534	26.6	510	<b>25.6</b>	<b>530</b>	25.4	534	26.6	510
416.gamess	688	28.5	694	28.2	<b>693</b>	<b>28.2</b>	564	34.7	563	34.8	<b>564</b>	<b>34.7</b>
433.milc	146	62.7	<b>147</b>	<b>62.4</b>	147	62.3	<b>146</b>	63.0	<b>145</b>	63.3	<b>145</b>	<b>63.2</b>
434.zeusmp	77.2	118	78.6	116	<b>78.4</b>	<b>116</b>	77.2	118	78.6	116	<b>78.4</b>	<b>116</b>
435.gromacs	<b>203</b>	<b>35.3</b>	202	35.3	203	35.2	<b>203</b>	<b>35.3</b>	202	35.3	203	35.2
436.cactusADM	34.3	349	<b>32.5</b>	<b>368</b>	31.7	377	34.3	349	<b>32.5</b>	<b>368</b>	31.7	377
437.leslie3d	65.9	143	<b>122</b>	<b>77.0</b>	132	71.3	<b>65.9</b>	143	<b>122</b>	<b>77.0</b>	132	71.3
444.namd	357	22.5	<b>357</b>	<b>22.5</b>	357	22.5	351	22.9	350	22.9	<b>351</b>	<b>22.9</b>
447.dealII	<b>211</b>	<b>54.2</b>	210	54.5	211	54.1	<b>211</b>	<b>54.2</b>	210	54.5	211	54.1
450.soplex	194	42.9	<b>195</b>	<b>42.9</b>	196	42.6	<b>194</b>	42.9	<b>195</b>	<b>42.9</b>	196	42.6
453.povray	128	41.5	126	42.3	<b>128</b>	<b>41.7</b>	109	48.7	<b>109</b>	<b>48.9</b>	104	50.9
454.calculix	<b>241</b>	<b>34.2</b>	240	34.4	242	34.1	201	41.1	202	40.8	<b>202</b>	<b>40.8</b>
459.GemsFDTD	79.9	133	<b>79.7</b>	<b>133</b>	79.5	134	<b>68.6</b>	<b>155</b>	68.5	155	68.8	154
465.tonto	<b>278</b>	<b>35.4</b>	278	35.5	279	35.3	236	41.6	<b>233</b>	<b>42.1</b>	232	42.4
470.lbm	23.4	587	<b>24.4</b>	<b>563</b>	28.2	487	23.4	587	<b>24.4</b>	<b>563</b>	28.2	487
481.wrf	197	56.7	<b>196</b>	<b>57.0</b>	195	57.2	197	56.7	<b>196</b>	<b>57.0</b>	195	57.2
482.sphinx3	<b>305</b>	<b>63.8</b>	302	64.5	305	63.8	<b>301</b>	<b>64.8</b>	<b>305</b>	63.9	<b>303</b>	<b>64.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:

Intel Hyper-Threading set to Disabled

Set Power Efficiency Mode to Performance

Sysinfo program /spec/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3

running on RH62-yjp2 Fri Jun 22 23:28:05 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 79.3**

Huawei RH2485 V2 (Intel Xeon E5-4650)

**SPECfp\_base2006 = 75.2**

CPU2006 license: 3175

Test date: Jun-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4650 0 @ 2.70GHz
        4 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264495772 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux RH62-yjp2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 22 17:09
```

```
SPEC is set to: /spec
Filesystem      Type   Size  Used Avail Use% Mounted on
/dev/sdal      ext3    270G   46G  210G  19%  /
```

Additional information from dmidecode:

```
Memory:
32x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"  
OMP\_NUM\_THREADS = "32"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 79.3**

Huawei RH2485 V2 (Intel Xeon E5-4650)

**SPECfp\_base2006 = 75.2**

CPU2006 license: 3175

Test date: Jun-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## General Notes (Continued)

using RHEL 6.1

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 79.3**

Huawei RH2485 V2 (Intel Xeon E5-4650)

**SPECfp\_base2006 = 75.2**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Jun-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 79.3**

Huawei RH2485 V2 (Intel Xeon E5-4650)

**SPECfp\_base2006 = 75.2**

**CPU2006 license:** 3175

**Test date:** Jun-2012

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 79.3**

Huawei RH2485 V2 (Intel Xeon E5-4650)

**SPECfp\_base2006 = 75.2**

**CPU2006 license:** 3175

**Test date:** Jun-2012

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:37:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 July 2012.