



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 63.1

Huawei RH2285 V2 (Intel Xeon E5-2430L)

SPECfp_base2006 = 60.5

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

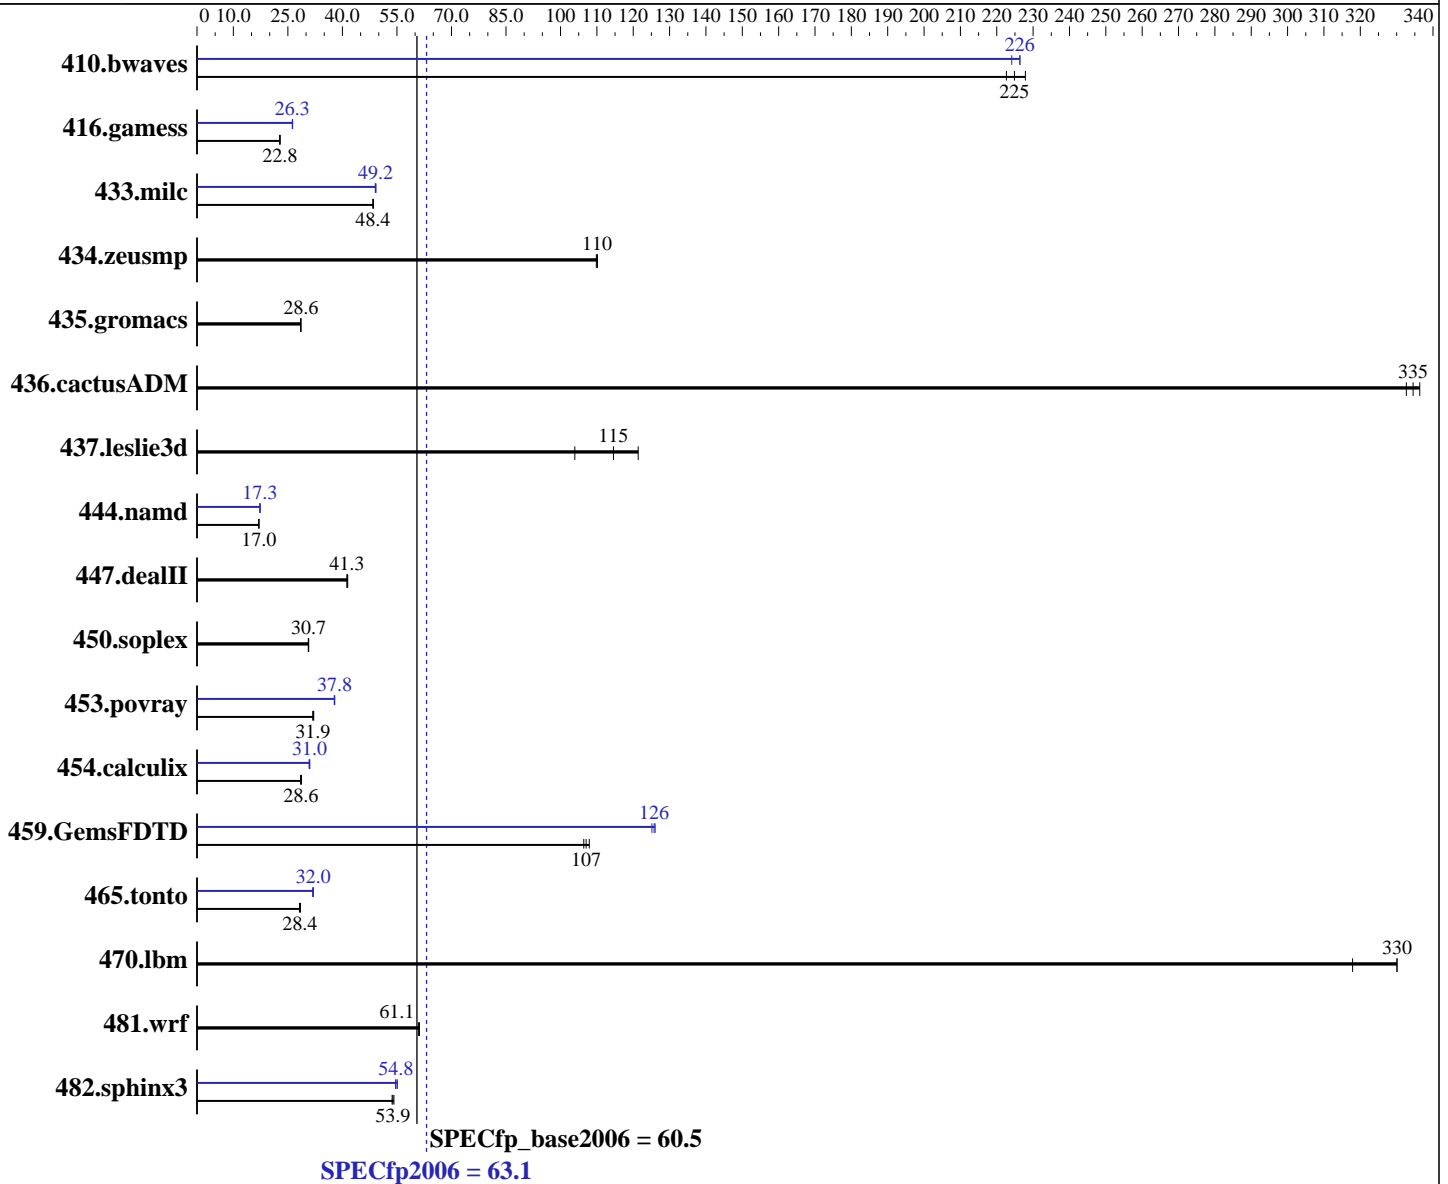

Hardware

CPU Name: Intel Xeon E5-2430L
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = **63.1**

Huawei RH2285 V2 (Intel Xeon E5-2430L)

SPECfp_base2006 = **60.5**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem: 1 x 300 GB SAS, 10K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	61.0	223	60.4	225	59.6	228	60.0	226	60.0	226	60.6	224
416.gamess	861	22.8	857	22.8	857	22.8	747	26.2	744	26.3	746	26.3
433.milc	190	48.4	190	48.4	189	48.5	187	49.0	187	49.2	187	49.2
434.zeusmp	82.6	110	82.8	110	82.6	110	82.6	110	82.8	110	82.6	110
435.gromacs	250	28.6	250	28.6	251	28.5	250	28.6	250	28.6	251	28.5
436.cactusADM	35.5	336	35.9	333	35.7	335	35.5	336	35.9	333	35.7	335
437.leslie3d	82.0	115	77.4	121	90.4	104	82.0	115	77.4	121	90.4	104
444.namd	471	17.0	471	17.0	471	17.0	463	17.3	463	17.3	463	17.3
447.dealII	277	41.3	277	41.3	276	41.5	277	41.3	277	41.3	276	41.5
450.soplex	272	30.6	271	30.7	272	30.7	272	30.6	271	30.7	272	30.7
453.povray	166	32.1	167	31.9	167	31.9	141	37.8	141	37.8	140	37.9
454.calculix	289	28.5	287	28.7	288	28.6	266	31.0	266	31.0	268	30.8
459.GemsFDTD	98.3	108	99.7	106	99.1	107	84.8	125	84.2	126	84.4	126
465.tonto	346	28.5	347	28.4	349	28.2	308	32.0	309	31.8	308	32.0
470.lbm	43.2	318	41.6	330	41.6	330	43.2	318	41.6	330	41.6	330
481.wrf	183	61.2	183	61.0	183	61.1	183	61.2	183	61.0	183	61.1
482.sphinx3	360	54.2	363	53.7	362	53.9	356	54.8	357	54.6	354	55.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Select only test related files when installing the operating system

Platform Notes

BIOS configuration:
Intel Hyper-Threading set to Disabled
Set Power Efficiency Mode to Performance
Sysinfo program /spec/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on DH310-2 Tue Jun 19 00:53:12 2012

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 63.1

Huawei RH2285 V2 (Intel Xeon E5-2430L)

SPECfp_base2006 = 60.5

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2430L 0 @ 2.00GHz
 2 "physical id"s (chips)
 12 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal: 99030424 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux DH310-2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 18 16:56

SPEC is set to: /spec

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext4 289G 66G 209G 24% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "12"
```

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	63.1
Huawei RH2285 V2 (Intel Xeon E5-2430L)	SPECfp_base2006 =	60.5
CPU2006 license: 3175	Test date:	Jun-2012
Test sponsor: Huawei	Hardware Availability:	May-2012
Tested by: Huawei	Software Availability:	Dec-2011

General Notes (Continued)

The Huawei RH2285 v2 and Huawei RH2285H v2 models are electronically equivalent. The results have been measured on a Huawei RH2285 v2 model.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 63.1

Huawei RH2285 V2 (Intel Xeon E5-2430L)

SPECfp_base2006 = 60.5

CPU2006 license: 3175

Test date: Jun-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 63.1

Huawei RH2285 V2 (Intel Xeon E5-2430L)

SPECfp_base2006 = 60.5

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 63.1

Huawei RH2285 V2 (Intel Xeon E5-2430L)

SPECfp_base2006 = 60.5

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 10:05:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 July 2012.