SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH77KC motherboard (Intel Core i5-3470T)

SPECfp®_rate2006 = 79.6

SPECfp_rate_base2006 = 78.8

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: May-2012
Hardware Availability: Apr-2012
Software Availability: Apr-2011

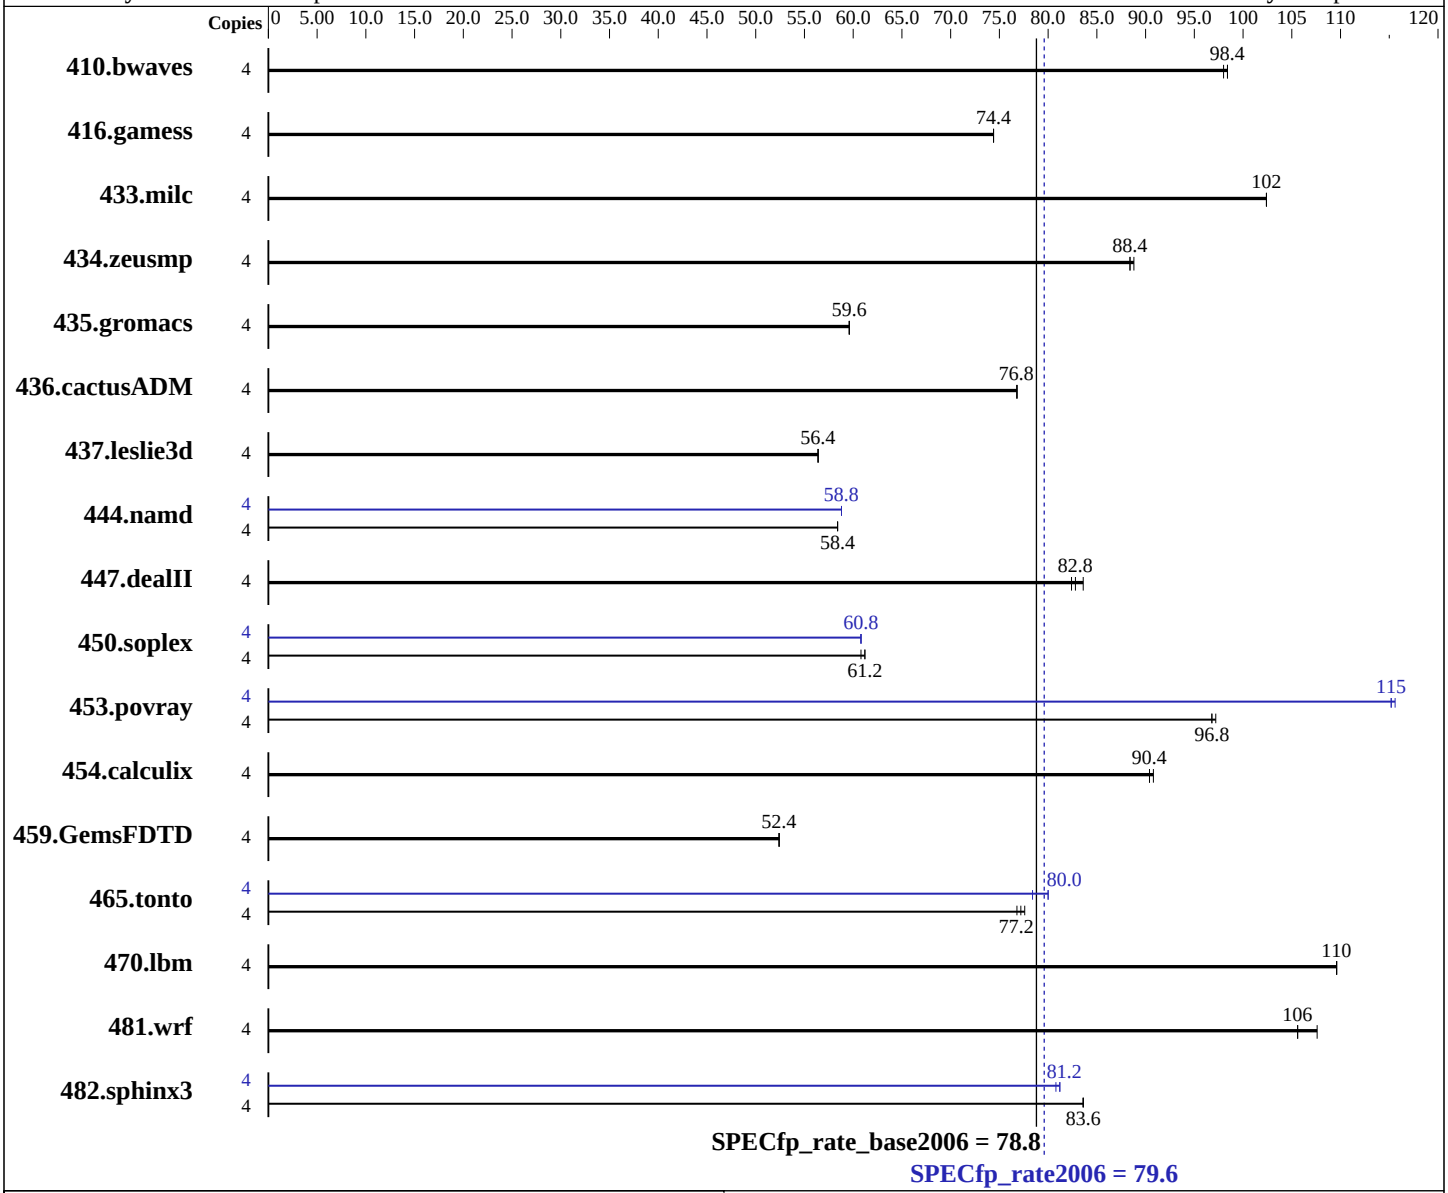

Hardware

CPU Name:	Intel Core i5-3470T
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 7 Ultimate (64-bit) 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 12.1.0.229 of Intel C++ Studio XE for Windows; Fortran: Version 12.1.0.229 of Intel Fortran Studio XE for Windows; Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
Auto Parallel:	No
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH77KC motherboard (Intel Core i5-3470T)

SPECfp_rate2006 = 79.6

SPECfp_rate_base2006 = 78.8

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: May-2012
Hardware Availability: Apr-2012
Software Availability: Apr-2011

L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
Other Hardware: None

System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 9.01 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	**554**	**98.4**	553	98.4	555	98.0	4	**554**	**98.4**	553	98.4	555	98.0
416.gamess	4	1055	74.4	**1055**	**74.4**	1054	74.4	4	1055	74.4	**1055**	**74.4**	1054	74.4
433.milc	4	**359**	**102**	359	102	359	102	4	**359**	**102**	359	102	359	102
434.zeusmp	4	**412**	**88.4**	412	88.4	410	88.8	4	**412**	**88.4**	412	88.4	410	88.8
435.gromacs	4	479	59.6	**479**	**59.6**	479	59.6	4	479	59.6	**479**	**59.6**	479	59.6
436.cactusADM	4	623	76.8	**623**	**76.8**	624	76.8	4	623	76.8	**623**	**76.8**	624	76.8
437.leslie3d	4	667	56.4	669	56.4	**667**	**56.4**	4	667	56.4	669	56.4	**667**	**56.4**
444.namd	4	**550**	**58.4**	550	58.4	550	58.4	4	546	58.8	**546**	**58.8**	546	58.8
447.dealII	4	**552**	**82.8**	546	83.6	556	82.4	4	**552**	**82.8**	546	83.6	556	82.4
450.soplex	4	547	60.8	547	61.2	**547**	**61.2**	4	550	60.8	**550**	**60.8**	550	60.8
453.povray	4	220	96.8	219	97.2	**220**	**96.8**	4	184	116	**185**	**115**	185	115
454.calculix	4	366	90.4	364	90.8	**364**	**90.4**	4	366	90.4	364	90.8	**364**	**90.4**
459.GemsFDTD	4	**808**	**52.4**	811	52.4	808	52.4	4	**808**	**52.4**	811	52.4	808	52.4
465.tonto	4	508	77.6	512	76.8	**509**	**77.2**	4	503	78.4	492	80.0	**492**	**80.0**
470.lbm	4	501	110	501	110	**501**	**110**	4	501	110	501	110	**501**	**110**
481.wrf	4	424	106	415	108	**422**	**106**	4	424	106	415	108	**422**	**106**
482.sphinx3	4	933	83.6	**932**	**83.6**	931	83.6	4	965	80.8	**961**	**81.2**	960	81.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler was set up to generate 64-bit binaries with the command: "ipsxe-comp-vars.bat intel64 vs2008" (shortcut provided in the Intel(r) Parallel Studio XE 2011 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.

Platform Notes

```
Sysinfo program C:\CPU200~1.17A/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on CltE840F20AA0BD Wed May 16 17:09:59 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Ultimate
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model  : DH77KC__
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 58 Stepping 9 GenuineIntel ~2901 Mhz
BIOS Version  : Intel Corp. KCH7710H.86A.0069.2012.0224.1825, 2/24/2012
Total Physical Memory: 8,090 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 512
L3CacheSize   : 3072
MaxClockSpeed : 2901
Name          : Intel(R) Core(TM) i5-3470T CPU @ 2.90GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -QxAVX -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:23:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 July 2012.