SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4620, 2.20 GHz)

SPECfp®_rate2006 = 731

SPECfp_rate_base2006 = 710

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2012
Hardware Availability: Aug-2012
Software Availability: Feb-2012

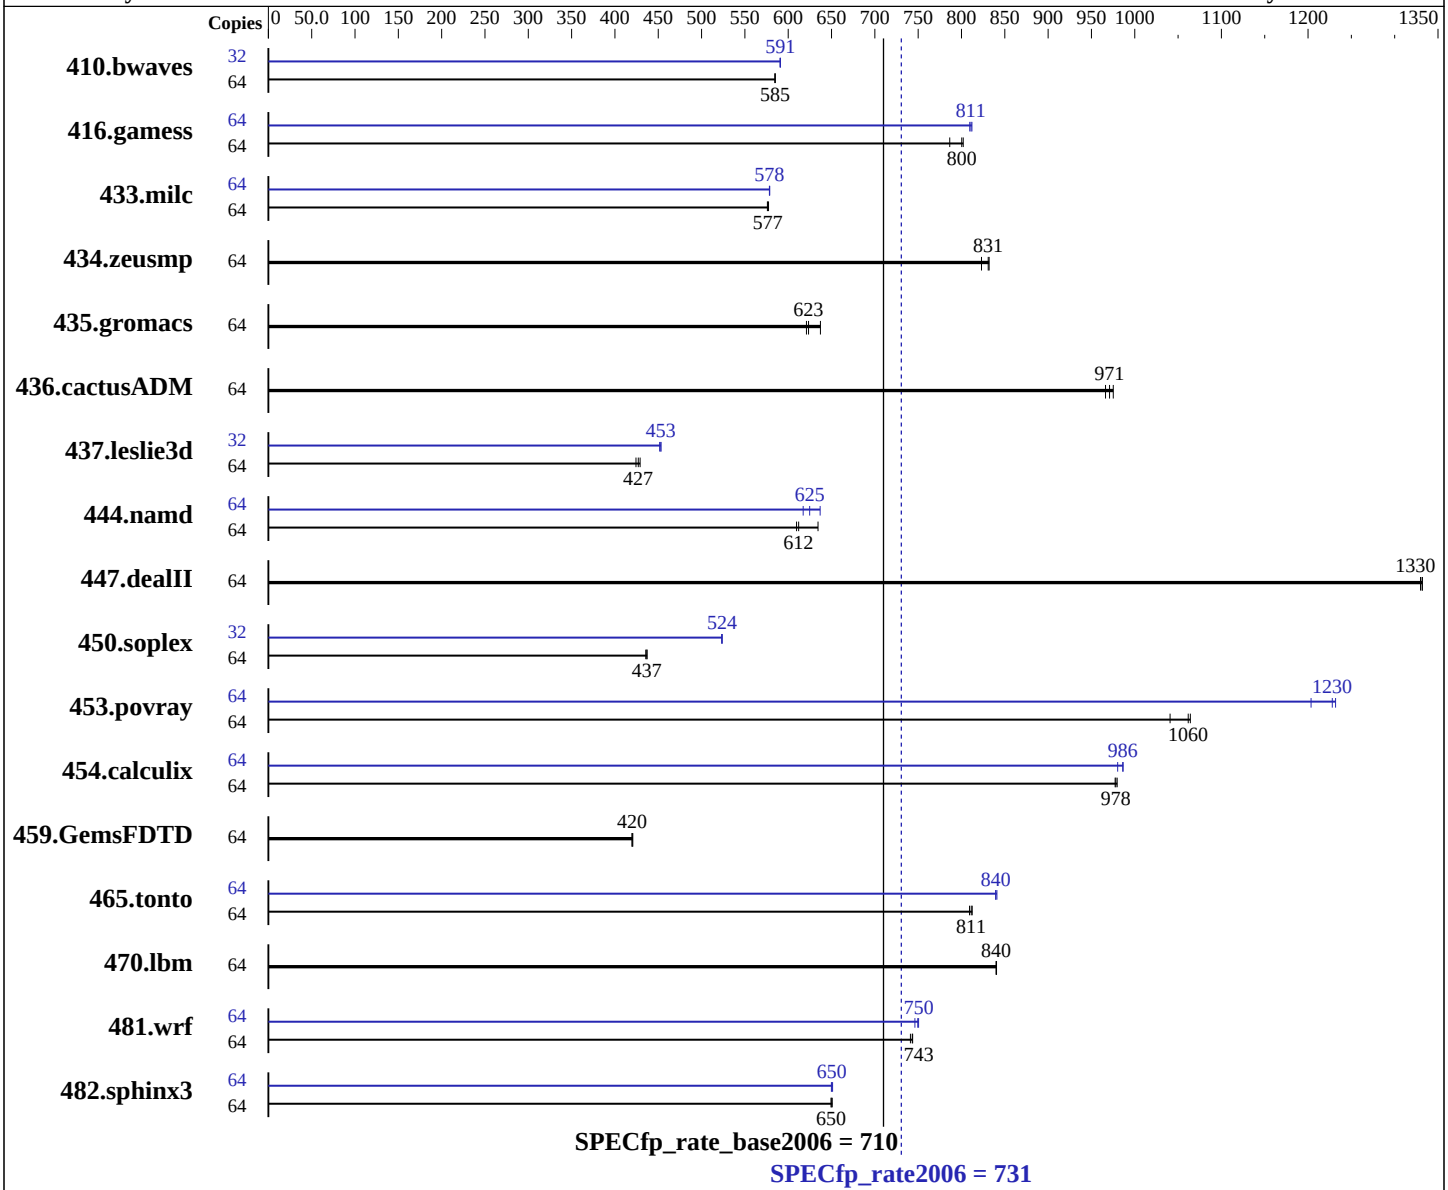

Hardware

CPU Name:	Intel Xeon E5-4620
CPU Characteristics:	Intel Turbo Boost Technology up to 2.60 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.27-default
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4620, 2.20 GHz)

SPECfp_rate2006 = 731

SPECfp_rate_base2006 = 710

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2012
Hardware Availability: Aug-2012
Software Availability: Feb-2012

L3 Cache: 16 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem: 1 x 900 GB 10000 RPM SAS
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1487	585	1487	585	**1487**	**585**	32	736	591	**736**	**591**	736	591
416.gamess	64	1562	802	1593	786	**1566**	**800**	64	1543	812	1548	810	**1545**	**811**
433.milc	64	1018	577	**1019**	**577**	1020	576	64	**1016**	**578**	1015	579	1016	578
434.zeusmp	64	700	832	**701**	**831**	708	823	64	700	832	**701**	**831**	708	823
435.gromacs	64	717	637	**733**	**623**	736	621	64	717	637	**733**	**623**	736	621
436.cactusADM	64	784	975	**788**	**971**	792	966	64	784	975	**788**	**971**	792	966
437.leslie3d	64	1402	429	**1409**	**427**	1418	424	32	**664**	**453**	666	452	664	453
444.namd	64	809	634	**839**	**612**	842	610	64	806	637	832	617	**822**	**625**
447.dealII	64	551	1330	550	1330	**550**	**1330**	64	551	1330	550	1330	**550**	**1330**
450.soplex	64	1221	437	1225	436	**1222**	**437**	32	510	524	510	523	**510**	**524**
453.povray	64	327	1040	320	1060	**321**	**1060**	64	283	1200	**277**	**1230**	276	1230
454.calculix	64	539	980	540	977	**540**	**978**	64	**535**	**986**	539	980	535	987
459.GemsFDTD	64	**1617**	**420**	1618	420	1614	421	64	**1617**	**420**	1618	420	1614	421
465.tonto	64	775	812	**776**	**811**	778	809	64	749	841	750	840	**750**	**840**
470.lbm	64	1046	840	**1047**	**840**	1047	840	64	1046	840	**1047**	**840**	1047	840
481.wrf	64	965	741	**962**	**743**	961	744	64	953	750	**954**	**750**	958	746
482.sphinx3	64	**1920**	**650**	1920	650	1917	651	64	1915	651	**1918**	**650**	1920	650

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost set to Enabled
C States/C1E set to Enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on linux-0j3r Thu May 24 02:59:18 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-4620 0 @ 2.20GHz
      4 "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
      physical 2: cores 0 1 2 3 4 5 6 7
      physical 3: cores 0 1 2 3 4 5 6 7
   cache size : 16384 KB

From /proc/meminfo
   MemTotal:       264501520 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 11 (x86_64)
      VERSION = 11
      PATCHLEVEL = 2

uname -a:
   Linux linux-0j3r 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
   (d73692b) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 23 11:13 last=S

SPEC is set to: /root/CPU2006-1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      ext3  886G  151G  691G  18% /

Additional information from dmidecode:
```

Continued on next page

Platform Notes (Continued)

```
(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

Continued on next page

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:17:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 August 2012.