




SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Server X3-2 (Intel Xeon E5-2690 2.9GHz)

SPECint®2006 = 58.5

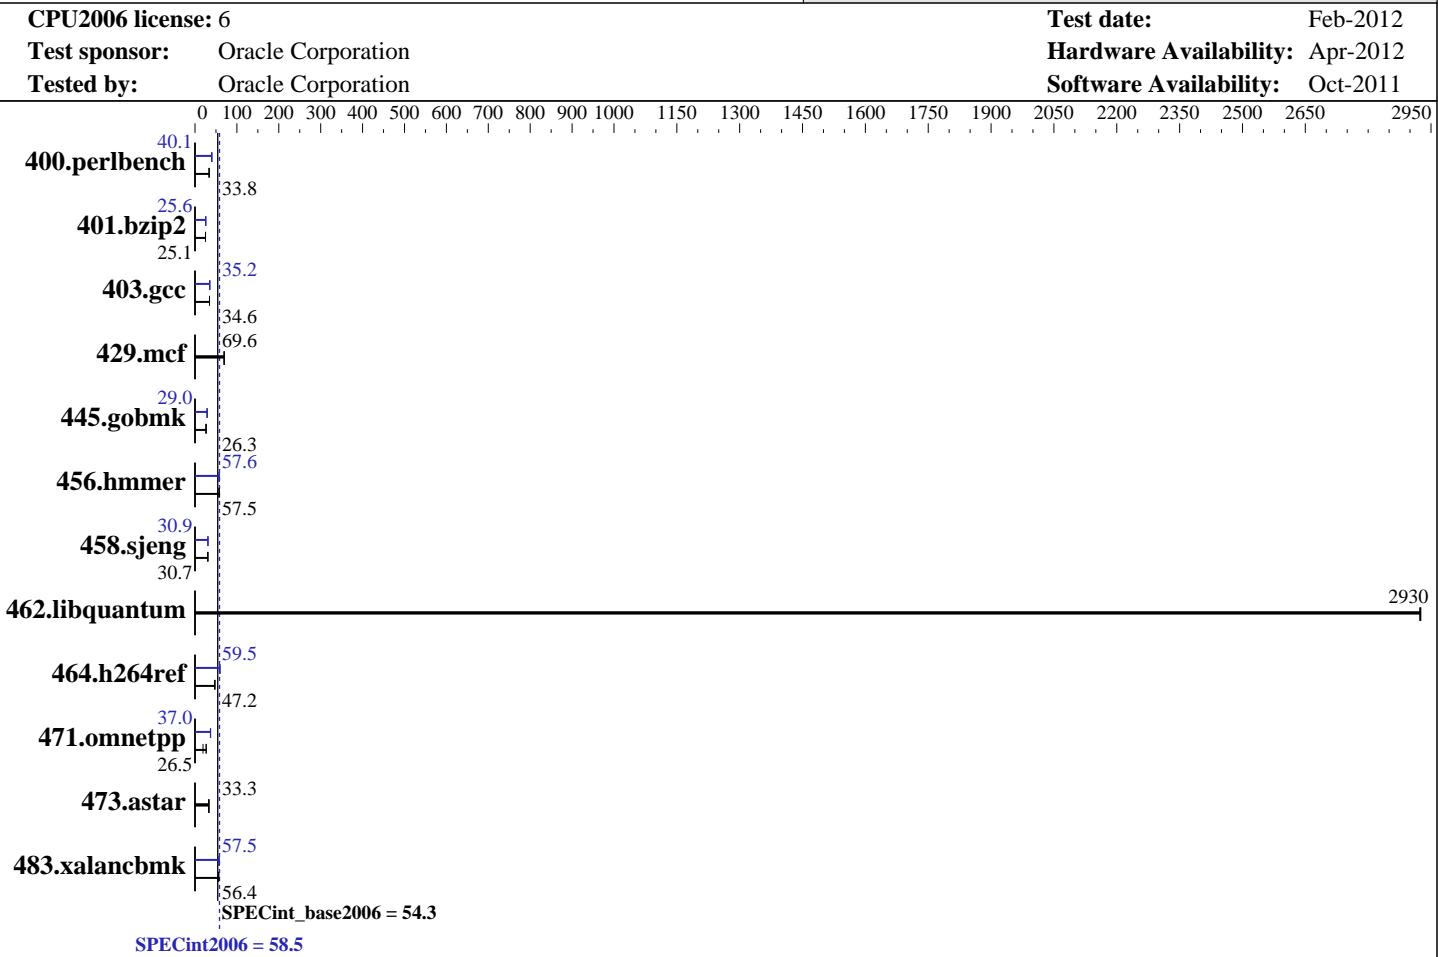

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB 10K RPM SAS
 Other Hardware: None

Software

Operating System: Oracle Linux Server release 6.1 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Server X3-2 (Intel Xeon E5-2690 2.9GHz)

SPECint2006 = 58.5

SPECint_base2006 = 54.3

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Feb-2012

Hardware Availability: Apr-2012

Software Availability: Oct-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	289	33.8	290	33.7	289	33.8	245	40.0	243	40.1	243	40.2
401.bzip2	385	25.0	385	25.1	384	25.1	377	25.6	376	25.7	377	25.6
403.gcc	232	34.6	232	34.7	232	34.6	229	35.2	228	35.2	229	35.2
429.mcf	131	69.5	131	69.6	131	69.6	131	69.5	131	69.6	131	69.6
445.gobmk	398	26.3	399	26.3	397	26.4	362	29.0	362	29.0	363	28.9
456.hmmer	162	57.6	162	57.5	162	57.5	162	57.6	162	57.6	162	57.6
458.sjeng	395	30.7	395	30.7	395	30.7	392	30.9	391	30.9	392	30.9
462.libquantum	7.09	2920	7.08	2930	7.08	2930	7.09	2920	7.08	2930	7.08	2930
464.h264ref	464	47.7	470	47.0	469	47.2	372	59.5	375	59.0	372	59.5
471.omnetpp	233	26.8	235	26.5	326	19.2	169	37.0	170	36.7	167	37.4
473.astar	215	32.7	211	33.3	210	33.4	215	32.7	211	33.3	210	33.4
483.xalancbmk	123	56.3	122	56.8	122	56.4	121	57.2	120	57.7	120	57.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Default BIOS Settings were used.

Oracle's Sun Server X3-2 was formerly known as the Sun Fire X4170 M3

Single processor configuration of this system is available as of Sep-2012

```
Sysinfo program /home/cpu2006v1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on bur407-120 Fri Feb 3 15:02:42 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 8
        siblings  : 16
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 58.5

Sun Server X3-2 (Intel Xeon E5-2690 2.9GHz)

SPECint_base2006 = 54.3

CPU2006 license: 6

Test date: Feb-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      264670732 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Oracle Linux Server release 6.1

From /etc/*release* /etc/*version*
oracle-release: Oracle Linux Server release 6.1
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Oracle Linux Server release 6.1
system-release-cpe: cpe:/o:oracle:oracle_linux:6server:ga:server

uname -a:
Linux bur407-120 2.6.32-131.0.15.el6.x86_64 #1 SMP Fri May 20 15:04:03 EDT
2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Feb 3 14:01

SPEC is set to: /home/cpu2006v1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_bur407120-lv_home
          ext4    95G   36G   54G  40%  /home

Additional information from dmidecode:
Memory:
16x Samsung M393B2G70BH0-YK0 16 GB 1600 MHz 1 rank

(End of data from sysinfo program)
dmidecode interpretation of 1 rank for 16x Samsung M393B2G70BH0-YK0 is wrong
```

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2006v1.2/lib32:/home/cpu2006v1.2/lib64"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Server X3-2 (Intel Xeon E5-2690 2.9GHz)

SPECint2006 = 58.5

SPECint_base2006 = 54.3

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Feb-2012

Hardware Availability: Apr-2012

Software Availability: Oct-2011

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -DSPEC_CPU_LP64

456.hammer: -DSPEC_CPU_LP64

458sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -DSPEC_CPU_LP64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Server X3-2 (Intel Xeon E5-2690 2.9GHz)

SPECint2006 = 58.5

SPECint_base2006 = 54.3

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Feb-2012

Hardware Availability: Apr-2012

Software Availability: Oct-2011

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch`
`-ansi-alias`

401.bzip2: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch`
`-ansi-alias`

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias`

456.hammer: `-xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`
`-ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Server X3-2 (Intel Xeon E5-2690 2.9GHz)

SPECint2006 = 58.5

SPECint_base2006 = 54.3

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Feb-2012

Hardware Availability: Apr-2012

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:29:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 July 2012.