SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Server X3-2L (Intel Xeon E5-2690 2.9GHz)

SPECfp®_rate2006 = 497

SPECfp_rate_base2006 = 461

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Apr-2012
Hardware Availability: Apr-2012
Software Availability: Jun-2012

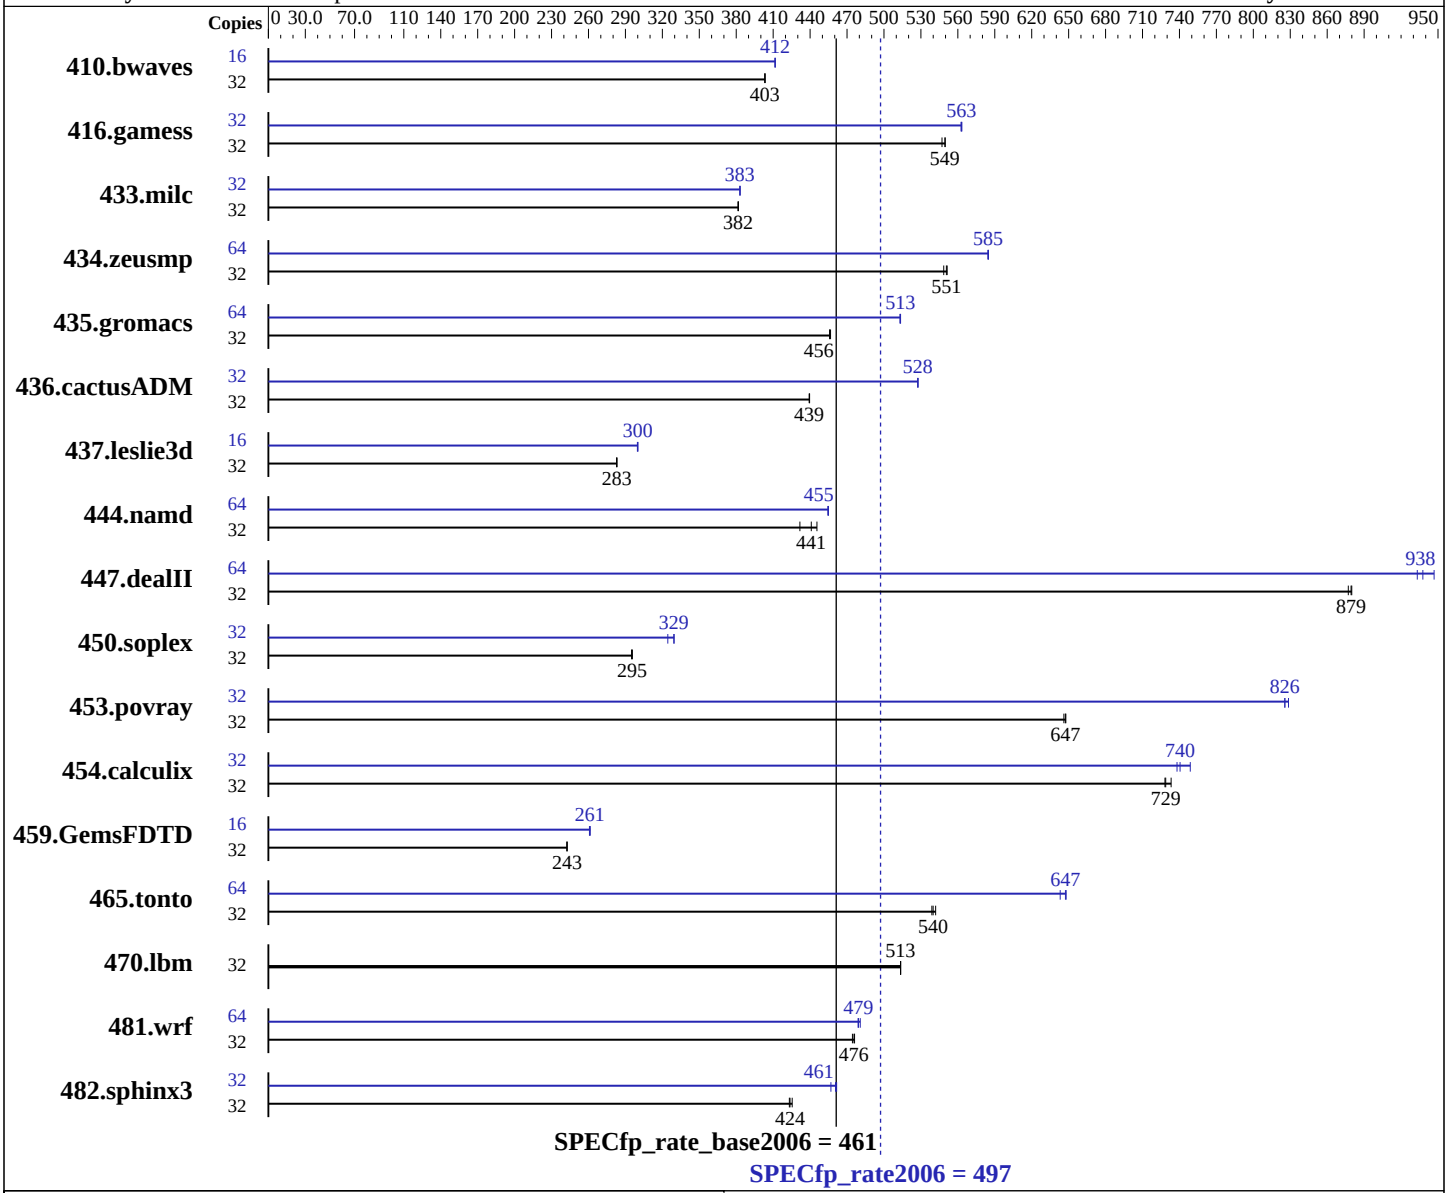

Hardware

CPU Name:	Intel Xeon E5-2690
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1 or 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Oracle Solaris 11 11/11 (SRU 03)
Compiler:	C/C++/Fortran: Version 12.3 of Oracle Solaris Studio (patch update 1, tested with nightly build 20120313)
Auto Parallel:	No
File System:	zfs
System State:	Default
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Server X3-2L (Intel Xeon E5-2690 2.9GHz)

SPECfp_rate2006 = 497

SPECfp_rate_base2006 = 461

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Apr-2012
Hardware Availability: Apr-2012
Software Availability: Jun-2012

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 600 GB 10K RPM SAS
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1078	403	1078	403	**1078**	**403**	16	**528**	**412**	528	412	528	412
416.gamess	32	1145	547	1140	550	**1140**	**549**	32	**1113**	**563**	1112	563	1114	563
433.milc	32	769	382	**770**	**382**	770	382	32	**767**	**383**	767	383	767	383
434.zeusmp	32	531	549	**529**	**551**	528	551	64	997	584	996	585	**996**	**585**
435.gromacs	32	501	456	500	457	**501**	**456**	64	890	513	891	513	**890**	**513**
436.cactusADM	32	870	440	870	439	**870**	**439**	32	725	527	725	528	**725**	**528**
437.leslie3d	32	**1063**	**283**	1063	283	1064	283	16	501	300	502	300	**501**	**300**
444.namd	32	**582**	**441**	594	432	576	446	64	**1128**	**455**	1130	454	1128	455
447.dealII	32	416	880	**416**	**879**	417	877	64	**781**	**938**	785	933	773	947
450.soplex	32	903	296	**904**	**295**	905	295	32	810	330	**811**	**329**	823	324
453.povray	32	263	646	263	648	**263**	**647**	32	206	826	205	829	**206**	**826**
454.calculix	32	**362**	**729**	363	728	360	733	32	**357**	**740**	353	749	358	738
459.GemsFDTD	32	**1400**	**243**	1400	242	1399	243	16	651	261	**650**	**261**	649	261
465.tonto	32	581	542	584	539	**583**	**540**	64	972	648	**973**	**647**	979	643
470.lbm	32	**856**	**513**	856	514	856	513	32	**856**	**513**	856	514	856	513
481.wrf	32	**752**	**476**	751	476	753	474	64	1492	479	**1492**	**479**	1487	481
482.sphinx3	32	1466	425	1474	423	**1472**	**424**	32	1351	462	**1354**	**461**	1365	457

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used to bind processes to CPU threads with pbind(1)
```

Operating System Notes

```
ulimit -s 10000  (shell): increases stack

/etc/system parameters
   autoup=1000
   zfs:zfs_arc_max=0x400000000
   zfs:zfs_arc_min=0x400000000
   ncsize=0x10000
   lpg_alloc_prefer=1

gzip compression set using "zfs set compression=gzip <zfs-filesystem>"
```

Platform Notes

```
Default BIOS Settings were used, except:
  Energy Performance set to Performance

Oracle's Sun Server X3-2L was formerly known as the Sun Fire X4270 M3

Single processor configuration of this system is available as of Sep-2012

Sysinfo program /export/home/gnana/cpu2006v1.2/Docs/sysinfo
: 6775  2011-08-16 #f7622badcf24e01c368b1db4377c
running on bur398-107 Sat Apr  7 02:52:39 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo


From /usr/sbin/psrinfo -pv
 Intel(r) Xeon(r) CPU E5-2690 0 @ 2.90GHz
 x86 (GenuineIntel 206D7 family 6 model 45 step 7 clock 2900 MHz)

/usr/sbin/psrinfo -p:   2 chips
/usr/sbin/psrinfo -pv | grep "core has" | wc -l:  16 cores
/usr/sbin/psrinfo | wc -l: 32 threads

/usr/sbin/prtconf | grep "Memory size:": 131062 Megabytes

/etc/release:
                            Oracle Solaris 11 11/11 X86
uname -a:
SunOS bur398-107 5.11 11.0 i86pc i386 i86pc

disk: df -h
Filesystem             Size   Used  Available Capacity  Mounted on
rpool/export/home      547G    17G        81G    17%    /export/home

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
OMP_NUM_THREADS = "1"
```

Base Compiler Invocation

C benchmarks:

```
cc
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_WORDS_LITTLEENDIAN
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-g -fast -xipo=2 -m64 -xalias_level=std

C++ benchmarks:
-fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-library=stdcxx4

Fortran benchmarks:
-fast -xipo=2 -m64 -xpagesize=2M

Benchmarks using both Fortran and C:
-g -fast(cc) -xipo=2 -m64 -xalias_level=std -fast(f90)
-xpagesize=2M

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Portability Flags

436.cactusADM: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_WORDS_LITTLEENDIAN

Peak Optimization Flags

C benchmarks:

433.milc: -g -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=std

470.lbm: basepeak = yes

482.sphinx3: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xalias_level=std -xunroll=6
-W2,-Aujam:noinner -lumem -lmvec

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xO3
-xprefetch=no%auto -m64 -xpagesize=2M
-xalias_level=compatible -library=stlport4

447.dealII: -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-library=stdcxx4 -xvector -xprefetch

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xalias_level=compatible -library=stlport4
-m32 -qoption iropt -Rujam -qoption iropt -Rtile

Continued on next page

Peak Optimization Flags (Continued)

453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xprefetch=no%auto
-xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-qoption iropt -Atile:skew=on -qoption iropt -Ainline:cs=700
-library=stlport4

Fortran benchmarks:

410.bwaves: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M

416.gamess: -fast -xipo=2 -m64 -xpagesize=2M -xunroll=1
-xvector=no%simd -xprefetch=no%auto

434.zeusmp: Same as 410.bwaves

437.leslie3d: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64

459.GemsFDTD: Same as 410.bwaves

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xvector=lib -xalias -lbsdmalloc

Benchmarks using both Fortran and C:

435.gromacs: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -m64 -xpagesize=2M -fsimple=2
-Qoption ube -fsimple=3 -xvector=no%simd

436.cactusADM: -g -fast(cc) -fast(f90) -xipo=2 -m64 -xpagesize=2M
-lumem

454.calculix: -g -fast(cc) -fast(f90) -xipo=0 -m64 -xpagesize=2M
-xprefetch_level=2 -xprefetch_auto_type=indirect_array_access
-Qoption ube -xprefetch_mult=24 -xunroll=2

481.wrf: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -m64

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.html
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.xml
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:21:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 July 2012.