SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385p Gen8
AMD Opteron 6212

SPECfp®_rate2006 = 247

SPECfp_rate_base2006 = 230

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

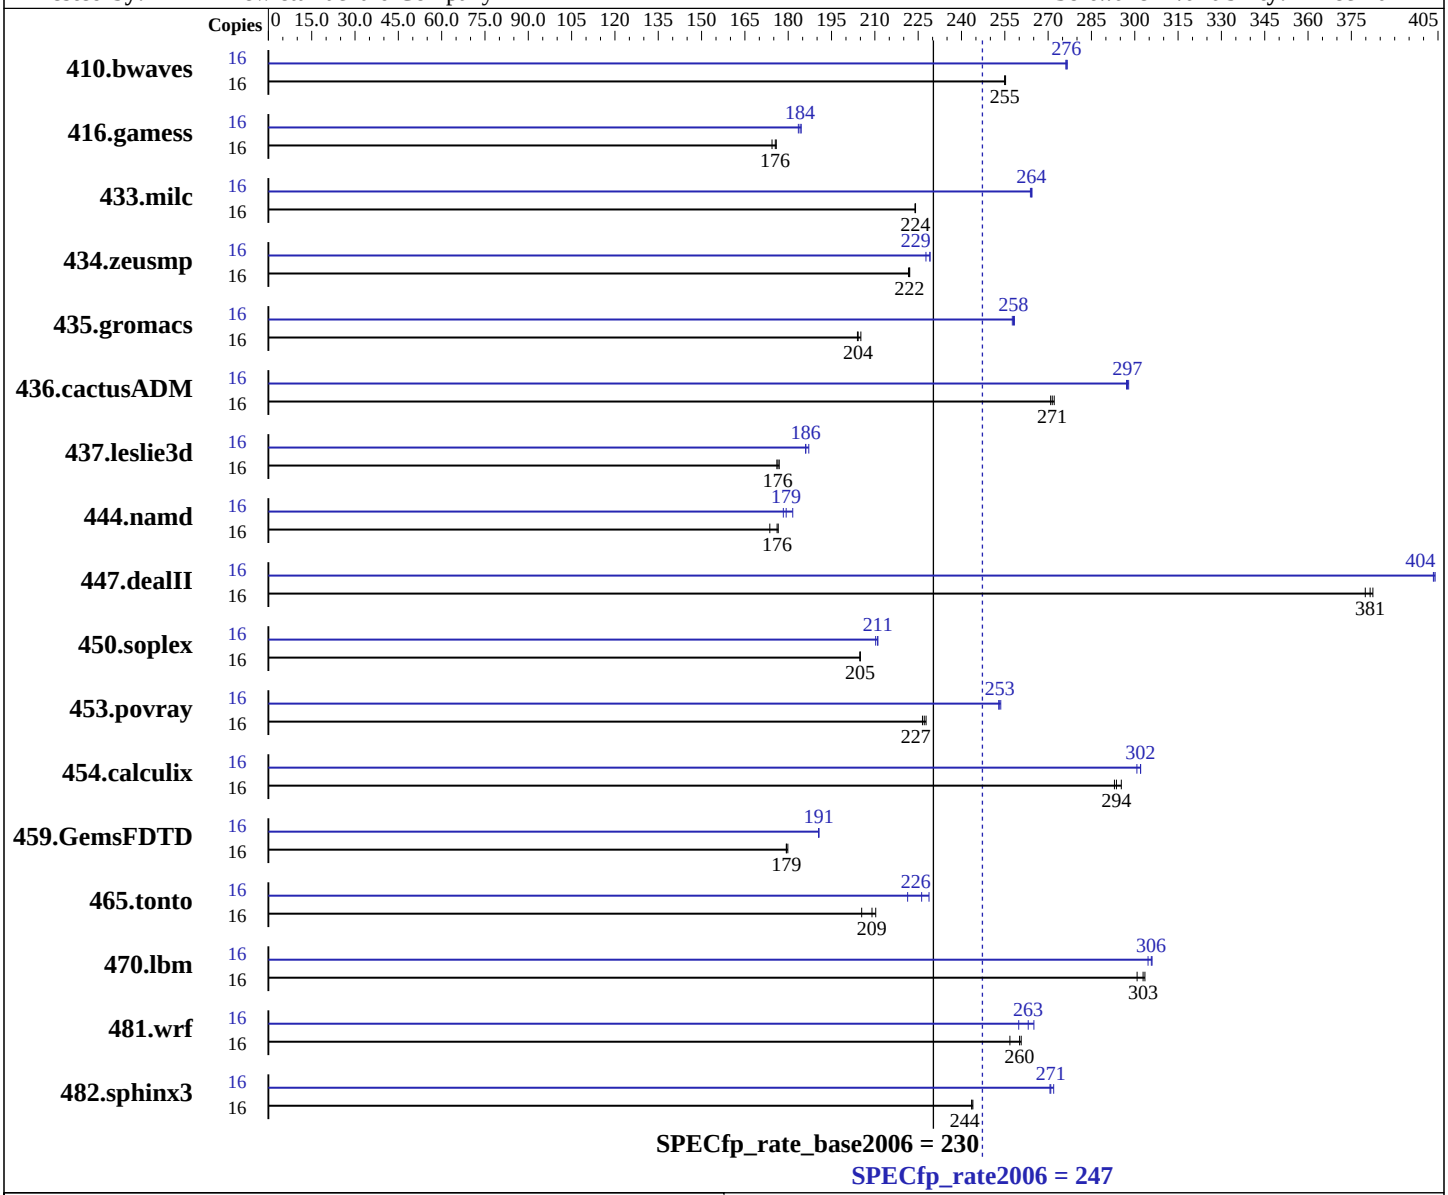

Hardware

CPU Name:	AMD Opteron 6212
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++/Fortran: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385p Gen8
AMD Opteron 6212

SPECfp_rate2006 = 247

SPECfp_rate_base2006 = 230

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Primary Cache:	256 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 4 cores
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 72 GB SAS, 15 K RPM
Other Hardware:	None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	853	255	852	255	**853**	**255**	16	787	276	**787**	**276**	786	277
416.gamess	16	1796	174	1781	176	**1785**	**176**	16	**1702**	**184**	1698	185	1707	184
433.milc	16	655	224	**656**	**224**	656	224	16	557	264	**556**	**264**	555	264
434.zeusmp	16	**656**	**222**	656	222	657	222	16	639	228	**636**	**229**	636	229
435.gromacs	16	557	205	**559**	**204**	560	204	16	442	258	**443**	**258**	443	258
436.cactusADM	16	706	271	**704**	**271**	703	272	16	**643**	**297**	642	298	643	297
437.leslie3d	16	**852**	**176**	850	177	854	176	16	804	187	808	186	**808**	**186**
444.namd	16	**728**	**176**	739	174	727	177	16	**716**	**179**	720	178	707	182
447.dealII	16	482	380	**480**	**381**	479	382	16	453	404	**454**	**404**	454	403
450.soplex	16	**651**	**205**	651	205	651	205	16	635	210	**632**	**211**	632	211
453.povray	16	376	226	374	228	**375**	**227**	16	337	253	**336**	**253**	336	254
454.calculix	16	447	295	451	293	**450**	**294**	16	437	302	**437**	**302**	439	301
459.GemsFDTD	16	**946**	**179**	944	180	947	179	16	**891**	**191**	891	191	891	191
465.tonto	16	**753**	**209**	766	205	749	210	16	711	221	**696**	**226**	688	229
470.lbm	16	731	301	**726**	**303**	724	304	16	722	305	718	306	**719**	**306**
481.wrf	16	**687**	**260**	696	257	686	261	16	**679**	**263**	674	265	688	260
482.sphinx3	16	**1280**	**244**	1278	244	1281	244	16	1152	271	**1151**	**271**	1147	272

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Transparent hugepage disabled: "echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled" before the run.
```

Continued on next page

Operating System Notes (Continued)

```
Set vm/nr_hugepages=14336 in /etc/sysctl.conf
Set "nodev /mnt/hugepages hugetlbfs defaults 0 0"
```

Platform Notes

```
 BIOS Configuration:
  HP Power Profile - Maximum Performance
  Thermal Configuration - Maximum Cooling
  Minimum Process Idle Power C1e State - Enabled
  System Locality Information Table - Disabled
Sysinfo program /cpu2006/Docs/sysinfo-rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ bb9c007959452bf0f152f4fdd865dbe3
running on dl385p-gen8-jfb Tue Jul 24 07:27:37 2012

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD Opteron(TM) Processor 6212
       2 "physical id"s (chips)
       16 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 4
       siblings  : 8
       physical 0: cores 0 1 2 3
       physical 1: cores 0 1 2 3
    cache size : 2048 KB

 From /proc/meminfo
    MemTotal:       132125400 kB
    HugePages_Total:   14336
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.2 (Santiago)

 From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

 uname -a:
    Linux dl385p-gen8-jfb 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST
    2011 x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Jul 23 08:48
```

Continued on next page

Platform Notes (Continued)

```
SPEC is set to: /cpu2006
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/sda3      ext4     66G  8.7G   54G  15% /

Additional information from dmidecode:
  BIOS HP A28 03/24/2012
  Memory:
   16x Not Specified Not Specified 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1104-rate-libs-revC/32:/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:
-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:
-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:
-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on -OPT:unroll_times_max=8 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2 -CG:p2align=0 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

C++ benchmarks:

444.namd: -march=bdver1 -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off -CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0 -fno-emit-exceptions -m32 -OPT:unroll_times_max=8 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off

Continued on next page

Peak Optimization Flags (Continued)

447.dealII (continued):
-TENV:frame_pointer=off

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:ignore_feedback=off
-INLINE:aggressive=on -OPT:RO=1 -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-fno-exceptions -CG:p2align=0 -m32 -HP:bdt=2m:heap=2m
-WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-CG:p2align=0 -CG:p2align_split=on -CG:dsched=on
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-IPA:plimit=1500 -HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -IPA:plimit=1500 -OPT:unroll_size=0
-LNO:fission=2 -CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m -CG:local_sched_alg=2 -GRA:unspill=ON
-CG:load_exe=3 -LNO:simd=3

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `-march=bdver1 -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-Ofast -LNO:blocking=off`
`-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0`
`-CG:dsched=on -WOPT:sib=on`

454.calculix: `-march=bdver1 -Ofast -OPT:unroll_size=256`
`-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m`

481.wrf: `-march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off`
`-IPA:callee_limit=5000 -GRA:prioritize_by_density=on`
`-CG:load_exe=1 -HP -WOPT:sib=on`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20120814.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20120814.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:05:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 August 2012.