SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BL Motherboard (Intel Core i5-2320)

SPECfp®_rate2006 = 102

SPECfp_rate_base2006 = 100

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: May-2012
Hardware Availability: Sep-2011
Software Availability: Apr-2011

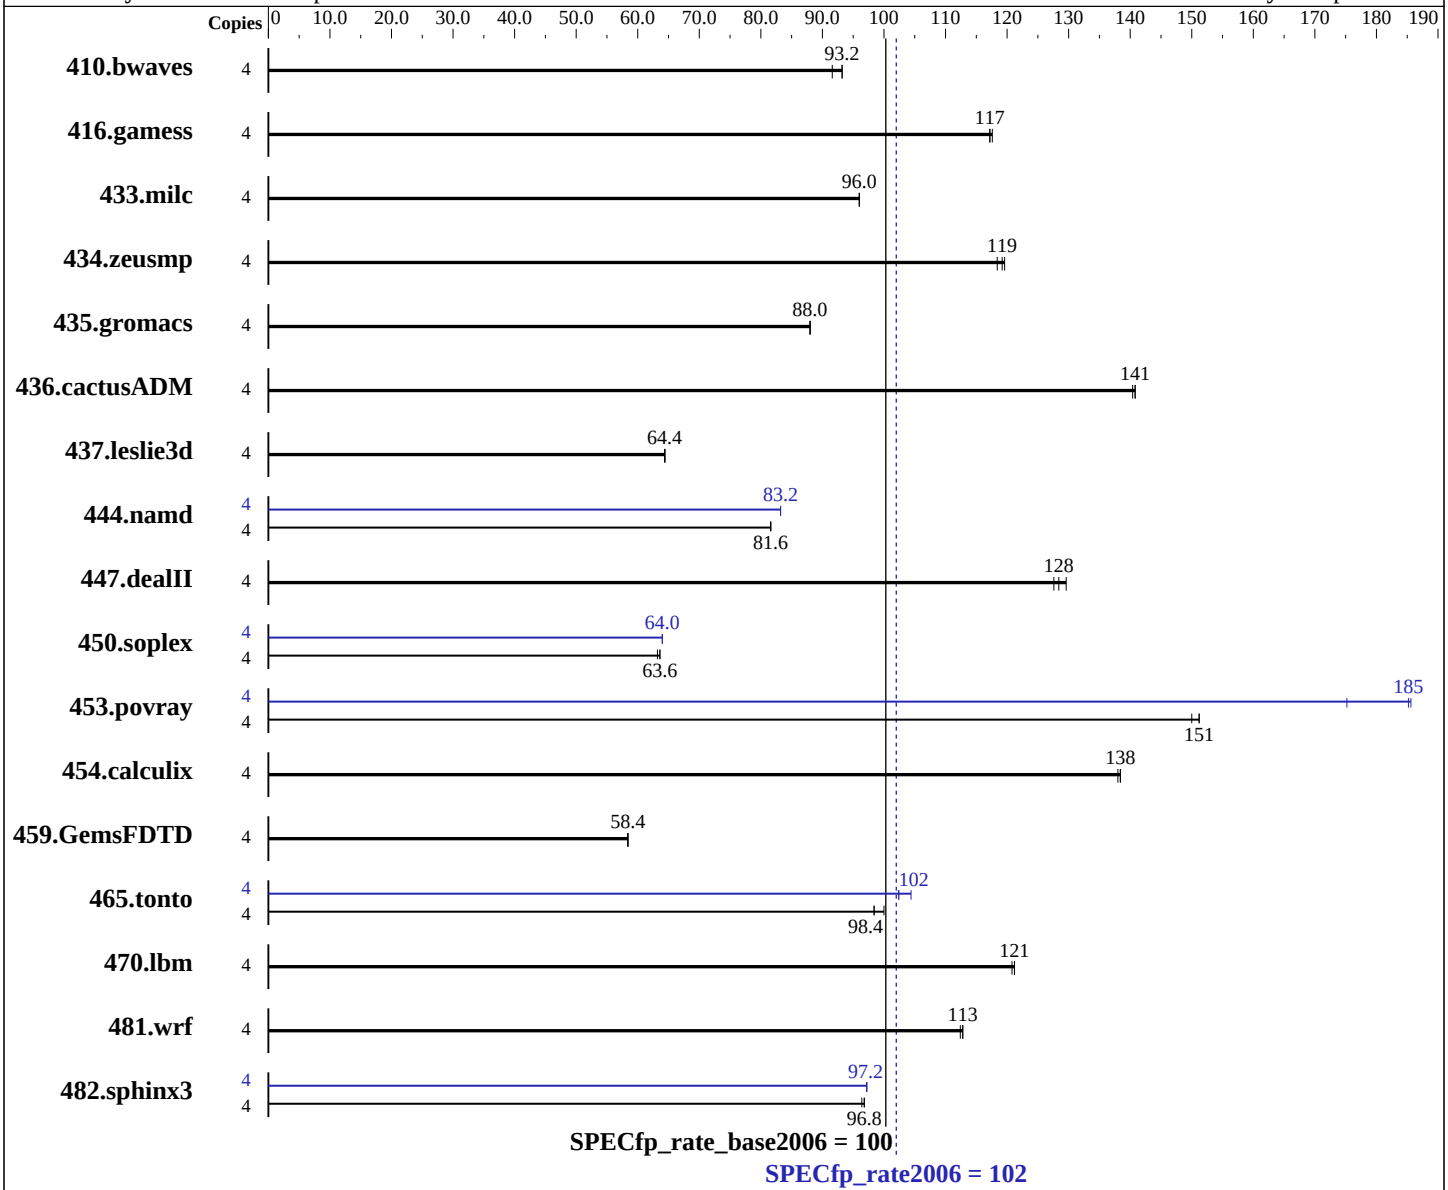

Hardware

CPU Name:	Intel Core i5-2320
CPU Characteristics:	Intel Turbo Boost Technology up to 3.3 GHz
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 7 Ultimate 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 12.1.0.229 of Intel C++ Studio XE for Windows; Fortran: Version 12.1.0.229 of Intel Fortran Studio XE for Windows; Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BL Motherboard (Intel Core i5-2320)

SPECfp_rate2006 = 102

SPECfp_rate_base2006 = 100

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: May-2012
Hardware Availability: Sep-2011
Software Availability: Apr-2011

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (2 x 2 GB 2Rx4 PC3-10600U-9)
Disk Subsystem: 1 TB SATA, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 9.01 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	593	91.6	583	93.2	**583**	**93.2**	4	593	91.6	583	93.2	**583**	**93.2**
416.gamess	4	667	118	**668**	**117**	668	117	4	667	118	**668**	**117**	668	117
433.milc	4	382	96.0	382	96.0	**382**	**96.0**	4	382	96.0	382	96.0	**382**	**96.0**
434.zeusmp	4	307	118	**305**	**119**	305	120	4	307	118	**305**	**119**	305	120
435.gromacs	4	**325**	**88.0**	325	88.0	325	88.0	4	**325**	**88.0**	325	88.0	325	88.0
436.cactusADM	4	340	140	340	141	**340**	**141**	4	340	140	340	141	**340**	**141**
437.leslie3d	4	584	64.4	**584**	**64.4**	584	64.4	4	584	64.4	**584**	**64.4**	584	64.4
444.namd	4	394	81.6	**394**	**81.6**	394	81.6	4	385	83.2	**385**	**83.2**	385	83.2
447.dealII	4	353	130	**357**	**128**	358	128	4	353	130	**357**	**128**	358	128
450.soplex	4	527	63.2	524	63.6	**525**	**63.6**	4	521	64.0	**521**	**64.0**	521	64.0
453.povray	4	141	151	**141**	**151**	142	150	4	115	186	**115**	**185**	122	175
454.calculix	4	239	138	**239**	**138**	239	138	4	239	138	**239**	**138**	239	138
459.GemsFDTD	4	726	58.4	**726**	**58.4**	726	58.4	4	726	58.4	**726**	**58.4**	726	58.4
465.tonto	4	401	98.4	394	100	**400**	**98.4**	4	**384**	**102**	384	102	377	104
470.lbm	4	454	121	454	121	**454**	**121**	4	454	121	454	121	**454**	**121**
481.wrf	4	397	113	**397**	**113**	397	112	4	397	113	**397**	**113**	397	112
482.sphinx3	4	**807**	**96.8**	807	96.4	806	96.8	4	**801**	**97.2**	802	97.2	801	97.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler was set up to generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2008" (shortcut provided in the Intel(r) Parallel Studio XE 2011 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch.
The config file option 'submit' was used to generate the affinity mask for each process.

Platform Notes

```
Sysinfo program C:\CPU200~1.17A/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on CltE06995D78610 Sat May  5 12:34:05 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Ultimate
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model  : DH67BL__
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 42 Stepping 7 GenuineIntel ~3001 Mhz
BIOS Version  : Intel Corp. BLH6710H.86A.0125.2011.0705.1517, 7/5/2011
Total Physical Memory: 4,003 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 1024
L3CacheSize   : 6144
MaxClockSpeed : 3001
Name          : Intel(R) Core(TM) i5-2320 CPU @ 3.00GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qstd=c99 ifort
```

Peak Portability Flags

```
Same as Base Portability Flags
```

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `-QxAVX -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE`

C++ benchmarks:

444.namd: `-QxAVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

447.dealII: `basepeak = yes`

450.soplex: `-QxAVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

453.povray: `-QxAVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:02:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 August 2012.