



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>2006 = 66.8

### Huawei XH620 V2 (Intel Xeon E5-2650L)

SPECfp\_base2006 = 63.4

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

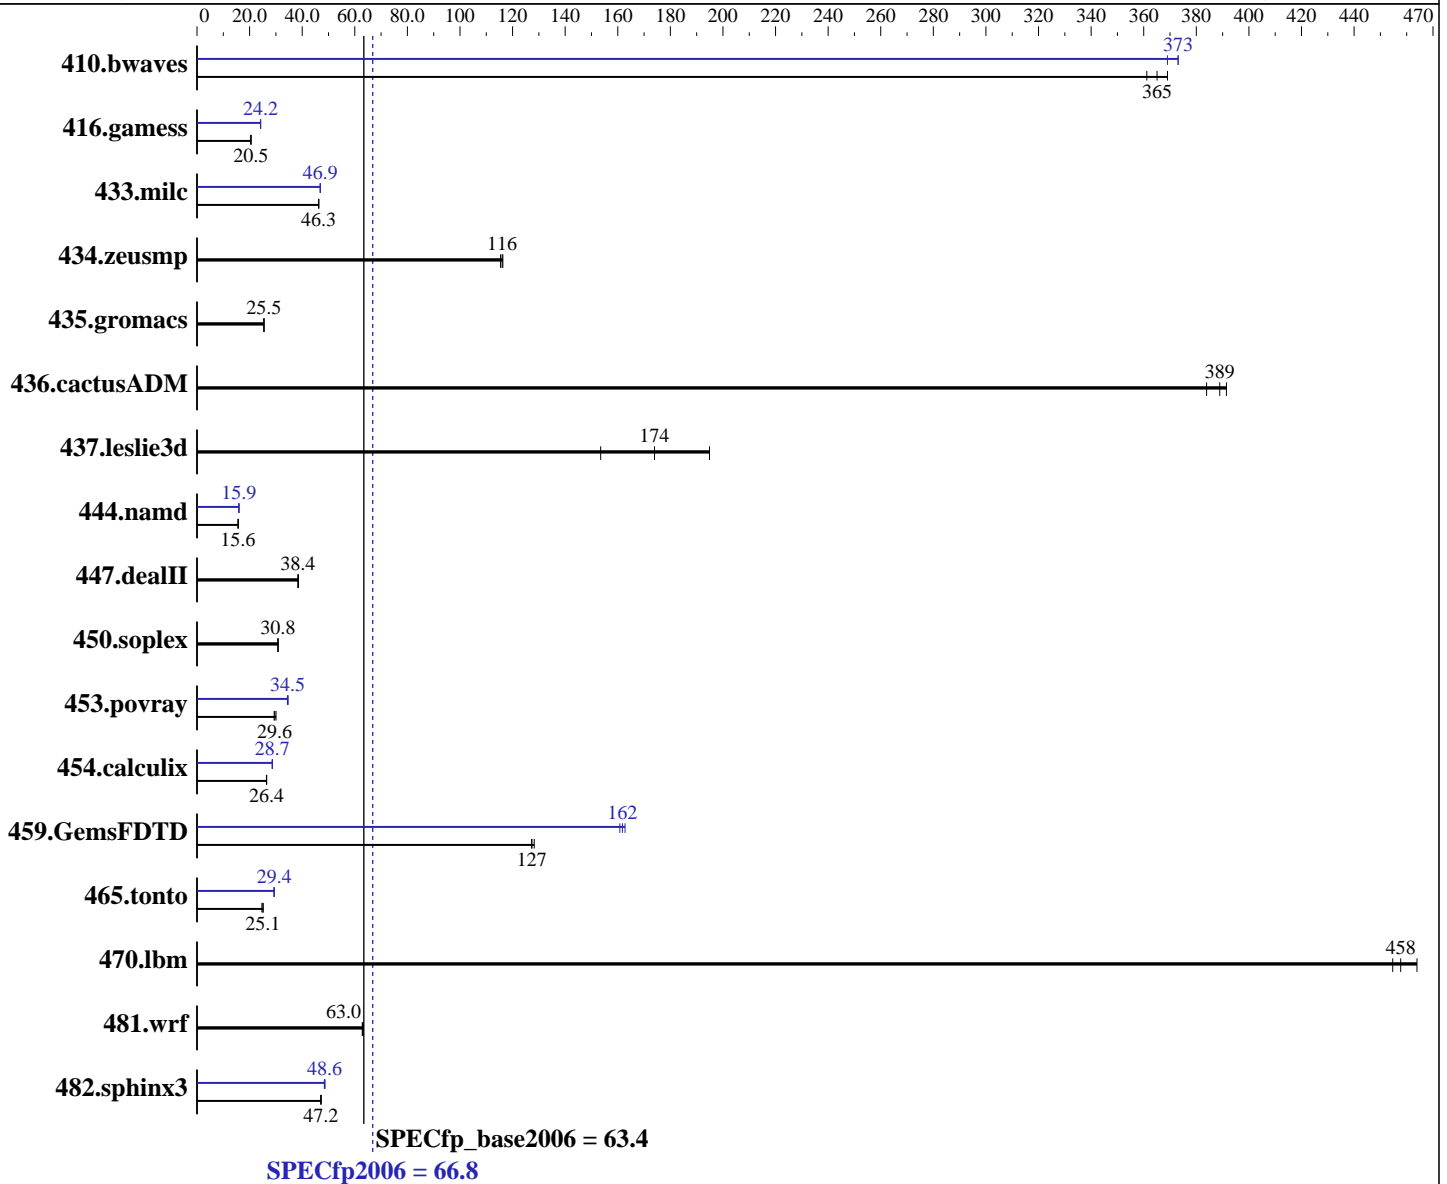

### Hardware

CPU Name: Intel Xeon E5-2650L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.30 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **66.8**

## Huawei XH620 V2 (Intel Xeon E5-2650L)

SPECfp\_base2006 = **63.4**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>37.2</u></b>	<b><u>365</u></b>	37.6	361	36.8	369	36.4	373	36.8	369	<b><u>36.4</u></b>	<b><u>373</u></b>
416.gamess	<b><u>955</u></b>	<b><u>20.5</u></b>	954	20.5	955	20.5	809	24.2	<b><u>810</u></b>	<b><u>24.2</u></b>	811	24.1
433.milc	<b><u>198</u></b>	<b><u>46.3</u></b>	198	46.2	198	46.3	<b><u>196</u></b>	<b><u>46.9</u></b>	196	46.9	196	46.9
434.zeusmp	78.8	115	78.2	116	<b><u>78.4</u></b>	<b><u>116</u></b>	78.8	115	78.2	116	<b><u>78.4</u></b>	<b><u>116</u></b>
435.gromacs	280	25.5	280	25.5	<b><u>280</u></b>	<b><u>25.5</u></b>	280	25.5	280	25.5	<b><u>280</u></b>	<b><u>25.5</u></b>
436.cactusADM	30.5	391	<b><u>30.7</u></b>	<b><u>389</u></b>	31.1	384	30.5	391	<b><u>30.7</u></b>	<b><u>389</u></b>	31.1	384
437.leslie3d	48.2	195	61.2	154	<b><u>54.0</u></b>	<b><u>174</u></b>	48.2	195	61.2	154	<b><u>54.0</u></b>	<b><u>174</u></b>
444.namd	512	15.7	513	15.6	<b><u>513</u></b>	<b><u>15.6</u></b>	503	15.9	503	15.9	<b><u>503</u></b>	<b><u>15.9</u></b>
447.dealII	<b><u>298</u></b>	<b><u>38.4</u></b>	298	38.4	296	38.6	<b><u>298</u></b>	<b><u>38.4</u></b>	298	38.4	296	38.6
450.soplex	<b><u>270</u></b>	<b><u>30.8</u></b>	270	30.8	271	30.8	<b><u>270</u></b>	<b><u>30.8</u></b>	270	30.8	271	30.8
453.povray	181	29.3	177	30.1	<b><u>180</u></b>	<b><u>29.6</u></b>	<b><u>154</u></b>	<b><u>34.5</u></b>	154	34.6	155	34.4
454.calculix	<b><u>312</u></b>	<b><u>26.4</u></b>	312	26.4	311	26.5	<b><u>288</u></b>	<b><u>28.7</u></b>	287	28.7	289	28.5
459.GemsFDTD	82.7	128	83.3	127	<b><u>83.3</u></b>	<b><u>127</u></b>	65.2	163	66.0	161	<b><u>65.6</u></b>	<b><u>162</u></b>
465.tonto	<b><u>392</u></b>	<b><u>25.1</u></b>	399	24.7	391	25.2	336	29.3	335	29.4	<b><u>335</u></b>	<b><u>29.4</u></b>
470.lbm	29.6	464	30.2	455	<b><u>30.0</u></b>	<b><u>458</u></b>	29.6	464	30.2	455	<b><u>30.0</u></b>	<b><u>458</u></b>
481.wrf	177	63.2	<b><u>177</u></b>	<b><u>63.0</u></b>	178	62.8	177	63.2	<b><u>177</u></b>	<b><u>63.0</u></b>	178	62.8
482.sphinx3	413	47.2	414	47.0	<b><u>413</u></b>	<b><u>47.2</u></b>	401	48.7	<b><u>401</u></b>	<b><u>48.6</u></b>	403	48.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
 Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:  
 Intel Hyper-Threading set to Disabled  
 Set Power Efficiency Mode to Performance  
 Sysinfo program /spec/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on RH62-rebuild Fri Sep 7 18:45:00 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 66.8

Huawei XH620 V2 (Intel Xeon E5-2650L)

SPECfp\_base2006 = 63.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650L 0 @ 1.80GHz
 2 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      132124032 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux RH62-rebuild 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 7 10:17

```

SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      289G  254G   21G  93% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "16"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 66.8

Huawei XH620 V2 (Intel Xeon E5-2650L)

SPECfp\_base2006 = 63.4

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Sep-2012  
Hardware Availability: May-2012  
Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 66.8

Huawei XH620 V2 (Intel Xeon E5-2650L)

SPECfp\_base2006 = 63.4

CPU2006 license: 3175

Test date: Sep-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 66.8

Huawei XH620 V2 (Intel Xeon E5-2650L)

SPECfp\_base2006 = 63.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:04:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 November 2012.