



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp®\_rate2006 = 334**

**Huawei XH620 V2 (Intel Xeon E5-2630L)**

**SPECfp\_rate\_base2006 = 327**

**CPU2006 license:** 3175


**Test date:** Oct-2012

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

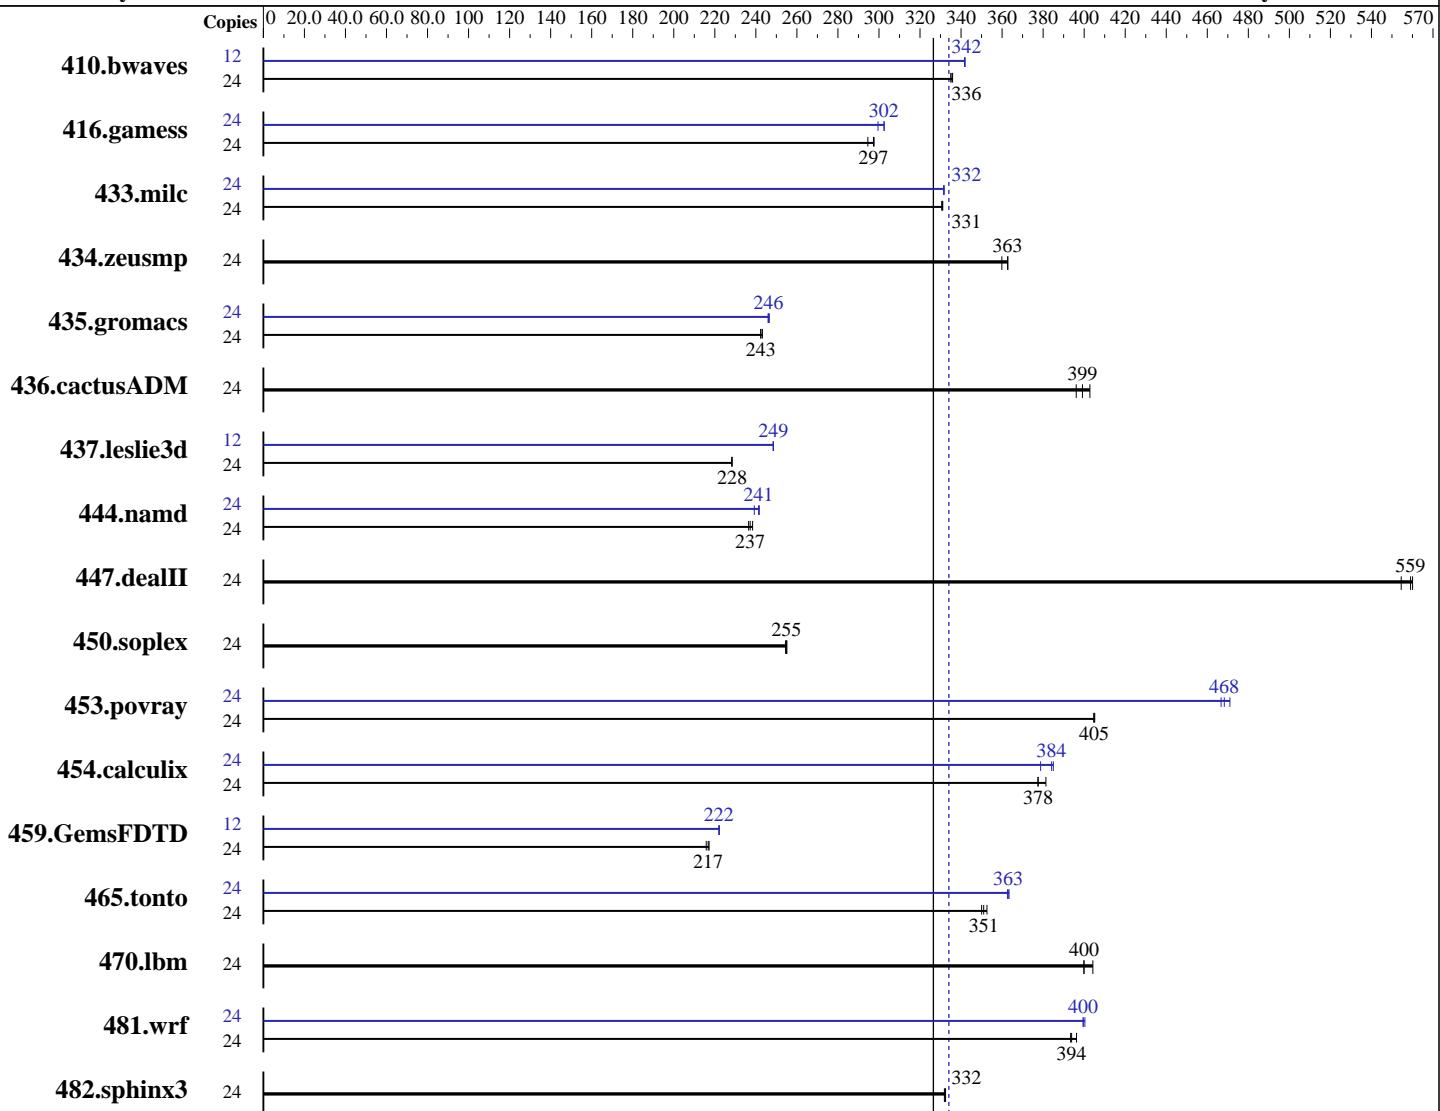

**SPECfp\_rate\_base2006 = 327**

**SPECfp\_rate2006 = 334**

## Hardware

CPU Name: Intel Xeon E5-2630L  
CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 334**

Huawei XH620 V2 (Intel Xeon E5-2630L)

**SPECfp\_rate\_base2006 = 327**

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL7)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<b>972</b>	<b>336</b>	971	336	974	335	12	<b>477</b>	<b>342</b>	477	342	<b>477</b>	<b>342</b>	<b>477</b>	<b>342</b>
416.gamess	24	1579	298	1595	295	<b>1580</b>	<b>297</b>	24	<b>1554</b>	<b>302</b>	1553	303	1569	300		
433.milc	24	665	331	<b>666</b>	<b>331</b>	666	331	24	664	332	664	332	<b>664</b>	<b>332</b>		
434.zeusmp	24	607	360	<b>602</b>	<b>363</b>	602	363	24	607	360	<b>602</b>	<b>363</b>	602	363		
435.gromacs	24	705	243	707	242	<b>707</b>	<b>243</b>	24	<b>696</b>	<b>246</b>	695	247	697	246		
436.cactusADM	24	724	396	<b>719</b>	<b>399</b>	712	403	24	724	396	<b>719</b>	<b>399</b>	712	403		
437.leslie3d	24	988	228	<b>988</b>	<b>228</b>	988	228	12	<b>454</b>	<b>249</b>	454	248	454	249		
444.namd	24	807	238	<b>811</b>	<b>237</b>	814	236	24	796	242	<b>798</b>	<b>241</b>	805	239		
447.dealII	24	490	560	<b>491</b>	<b>559</b>	495	555	24	490	560	<b>491</b>	<b>559</b>	495	555		
450.soplex	24	787	254	<b>785</b>	<b>255</b>	785	255	24	787	254	<b>785</b>	<b>255</b>	785	255		
453.povray	24	316	405	<b>315</b>	<b>405</b>	315	405	24	<b>273</b>	<b>468</b>	274	467	271	471		
454.calculix	24	519	381	525	377	<b>524</b>	<b>378</b>	24	514	385	<b>515</b>	<b>384</b>	523	379		
459.GemsFDTD	24	<b>1175</b>	<b>217</b>	1172	217	1180	216	12	573	222	573	222	<b>573</b>	<b>222</b>		
465.tonto	24	<b>673</b>	<b>351</b>	675	350	670	353	24	650	363	<b>651</b>	<b>363</b>	651	363		
470.lbm	24	825	400	<b>825</b>	<b>400</b>	816	404	24	825	400	<b>825</b>	<b>400</b>	816	404		
481.wrf	24	681	393	<b>681</b>	<b>394</b>	677	396	24	671	400	670	400	<b>671</b>	<b>400</b>		
482.sphinx3	24	<b>1408</b>	<b>332</b>	1409	332	1407	332	24	<b>1408</b>	<b>332</b>	1409	332	1407	332		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 334

Huawei XH620 V2 (Intel Xeon E5-2630L)

SPECfp\_rate\_base2006 = 327

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Operating System Notes (Continued)

Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance  
Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3  
running on RH62-rebuild Wed Oct 17 11:27:04 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2630L 0 @ 2.00GHz
        2 "physical id"s (chips)
        24 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 6
        siblings : 12
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
    cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:      132118644 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux RH62-rebuild 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
    x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 16 20:56

```
SPEC is set to: /spec
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda1      ext4  289G   80G  195G  29%  /
```

Additional information from dmidecode:

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 334**

Huawei XH620 V2 (Intel Xeon E5-2630L)

**SPECfp\_rate\_base2006 = 327**

**CPU2006 license:** 3175

**Test date:** Oct-2012

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"

Binaries compiled on a system with 2 x Xeon X5650 CPU + 16GB memory  
using RHEL 5.5

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
    444.namd: -DSPEC\_CPU\_LP64  
    447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
    465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
    481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

    -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
    -ansi-alias -opt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 334**

Huawei XH620 V2 (Intel Xeon E5-2630L)

**SPECfp\_rate\_base2006 = 327**

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
    433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
450.soplex: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei XH620 V2 (Intel Xeon E5-2630L)

**SPECfp\_rate2006 = 334**

**SPECfp\_rate\_base2006 = 327**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Oct-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-opt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xsse4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 334**

Huawei XH620 V2 (Intel Xeon E5-2630L)

**SPECfp\_rate\_base2006 = 327**

**CPU2006 license:** 3175

**Test date:** Oct-2012

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:10:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 November 2012.