SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Tecal RH5885 V2

SPECfp®_rate2006 = 580

SPECfp_rate_base2006 = 572

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2012
Hardware Availability: Oct-2012
Software Availability: Oct-2012

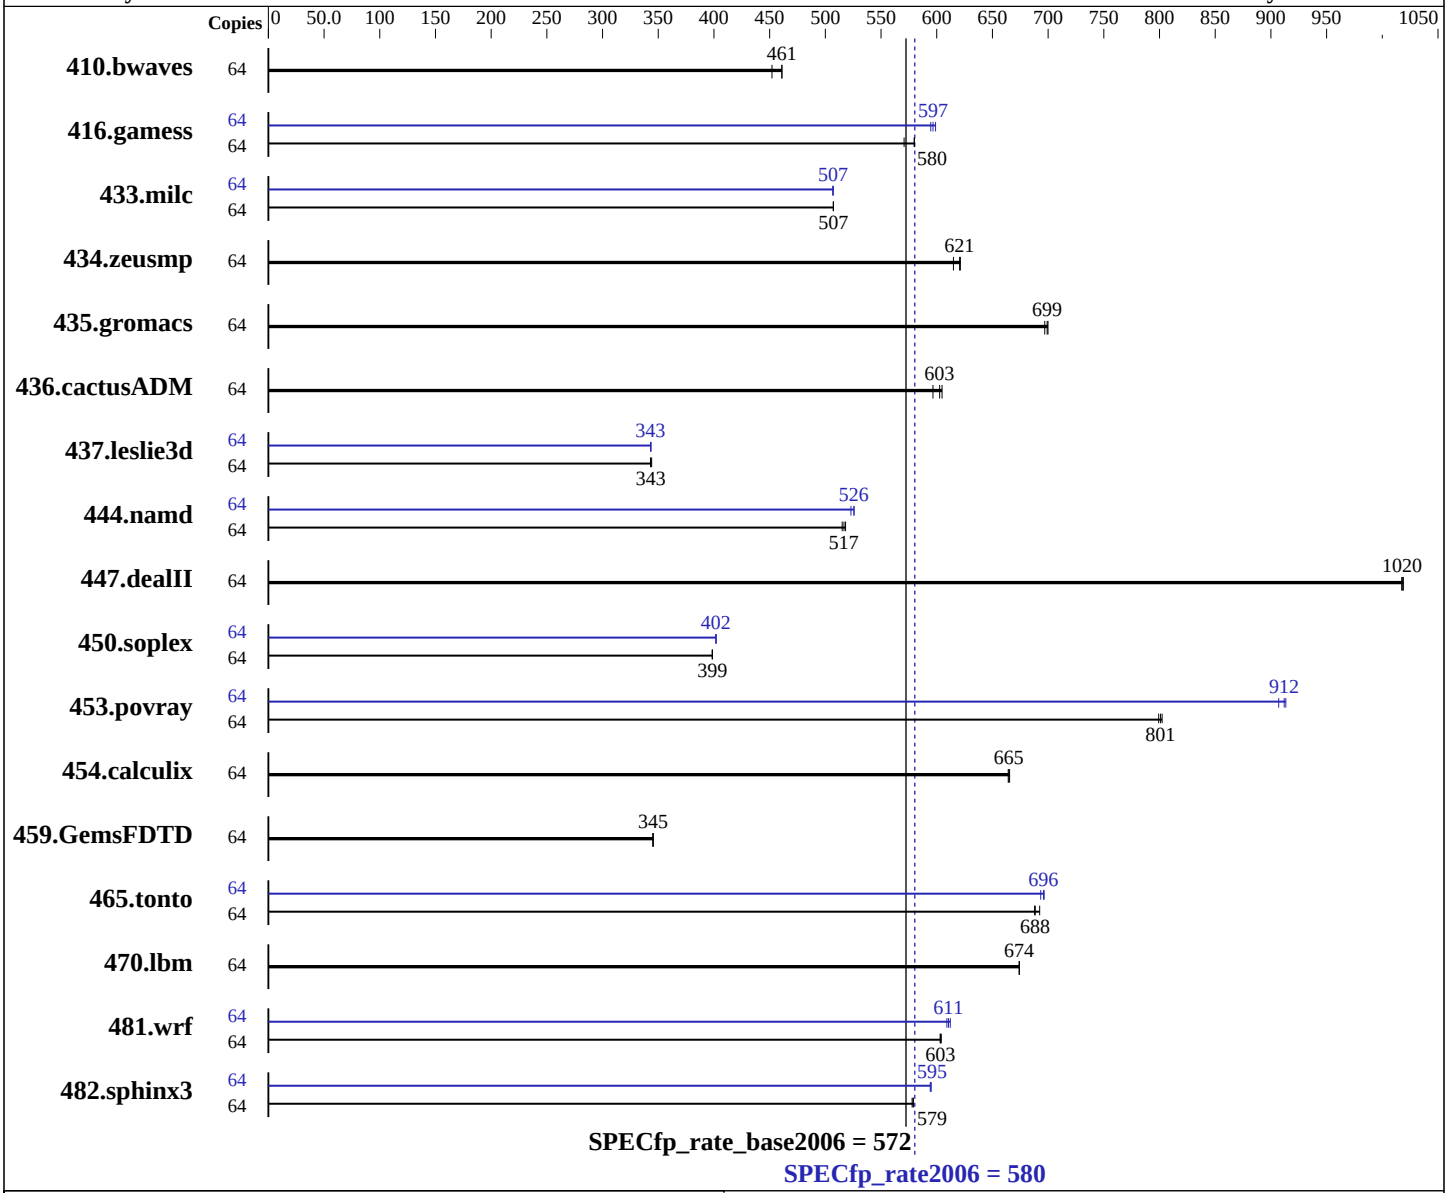

Hardware

CPU Name:	Intel Xeon E7-4830
CPU Characteristics:	Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 13.0.0.079 of Intel C++ Studio XE for Linux; Fortran: Version 13.0.0.079 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Tecal RH5885 V2

SPECfp_rate2006 = 580

SPECfp_rate_base2006 = 572

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2012
Hardware Availability: Oct-2012
Software Availability: Oct-2012

L3 Cache: 24 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 4Rx4 PC3-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem: 1 x 300 GB SAS, 10K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	**1887**	**461**	1924	452	1887	461	64	**1887**	**461**	1924	452	1887	461
416.gamess	64	2161	580	**2161**	**580**	2196	571	64	2092	599	**2100**	**597**	2107	595
433.milc	64	1158	507	1158	507	**1158**	**507**	64	1159	507	1159	507	**1159**	**507**
434.zeusmp	64	947	615	**939**	**621**	938	621	64	947	615	**939**	**621**	938	621
435.gromacs	64	653	700	656	697	**654**	**699**	64	653	700	656	697	**654**	**699**
436.cactusADM	64	1282	597	**1269**	**603**	1265	605	64	1282	597	**1269**	**603**	1265	605
437.leslie3d	64	**1752**	**343**	1754	343	1748	344	64	**1753**	**343**	1751	344	1753	343
444.namd	64	991	518	996	515	**993**	**517**	64	976	526	**976**	**526**	981	523
447.dealII	64	**719**	**1020**	720	1020	719	1020	64	**719**	**1020**	720	1020	719	1020
450.soplex	64	1339	399	**1339**	**399**	1339	399	64	1328	402	**1328**	**402**	1329	402
453.povray	64	**425**	**801**	426	799	424	802	64	375	907	373	913	**373**	**912**
454.calculix	64	793	665	795	664	**794**	**665**	64	793	665	795	664	**794**	**665**
459.GemsFDTD	64	**1966**	**345**	1967	345	1966	345	64	**1966**	**345**	1967	345	1966	345
465.tonto	64	**915**	**688**	916	688	910	692	64	908	693	**905**	**696**	904	696
470.lbm	64	1304	674	**1304**	**674**	1305	674	64	1304	674	**1304**	**674**	1305	674
481.wrf	64	1183	604	1185	603	**1185**	**603**	64	**1171**	**611**	1174	609	1168	612
482.sphinx3	64	2154	579	**2155**	**579**	2158	578	64	**2097**	**595**	2099	594	2097	595

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Sysinfo program /root/benchmark/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ 5569a0425e2ad530534e4c79a46e4d28
running on Huawei-RH5885 Sun Oct 28 16:53:11 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7- 4830 @ 2.13GHz
      4 "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 8 17 18 24 25
      physical 1: cores 0 1 2 8 17 18 24 25
      physical 2: cores 0 1 2 8 17 18 24 25
      physical 3: cores 0 1 2 8 17 18 24 25
   cache size : 24576 KB

From /proc/meminfo
   MemTotal:       1058607956 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux Huawei-RH5885 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 27 22:12

SPEC is set to: /root/benchmark/cpu2006
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/sda1      ext4    274G  105G  156G  41% /root/benchmark

Additional information from dmidecode:
  BIOS American Megatrends Inc. RGPUC-BIOS-V018 08/29/2012
  Memory:
   64x   16 GB
```

Continued on next page

Platform Notes (Continued)

```
      64x Hyundai HMT42GR7BMR4C-H9 16 GB 1067 MHz 4 rank

   (End of data from sysinfo program)
      Descriptions about memory generated by sysinfo are not correct,
      only 64 DIMMs are installed not 128, see descriptions below.
      Memory:
       64x Hyundai HMT42GR7BMR4C-H9 16 GB 1067 MHz 4 rank
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/benchmark/cpu2006/libs/32:/root/benchmark/cpu2006/libs/64"

 Binaries compiled on a system with  4xE7-4807 CPU + 512 GB
 memory using RHEL6.2
 Transparent Huge Pages disabled with:
 echo never  > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revF.html
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revF.xml
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:05:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 November 2012.