SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Tecal RH5885 V2 (8-sockets, Intel Xeon E7-8850)

SPECfp®_rate2006 = 977

SPECfp_rate_base2006 = 963

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jan-2013
Hardware Availability: Oct-2012
Software Availability: Oct-2012

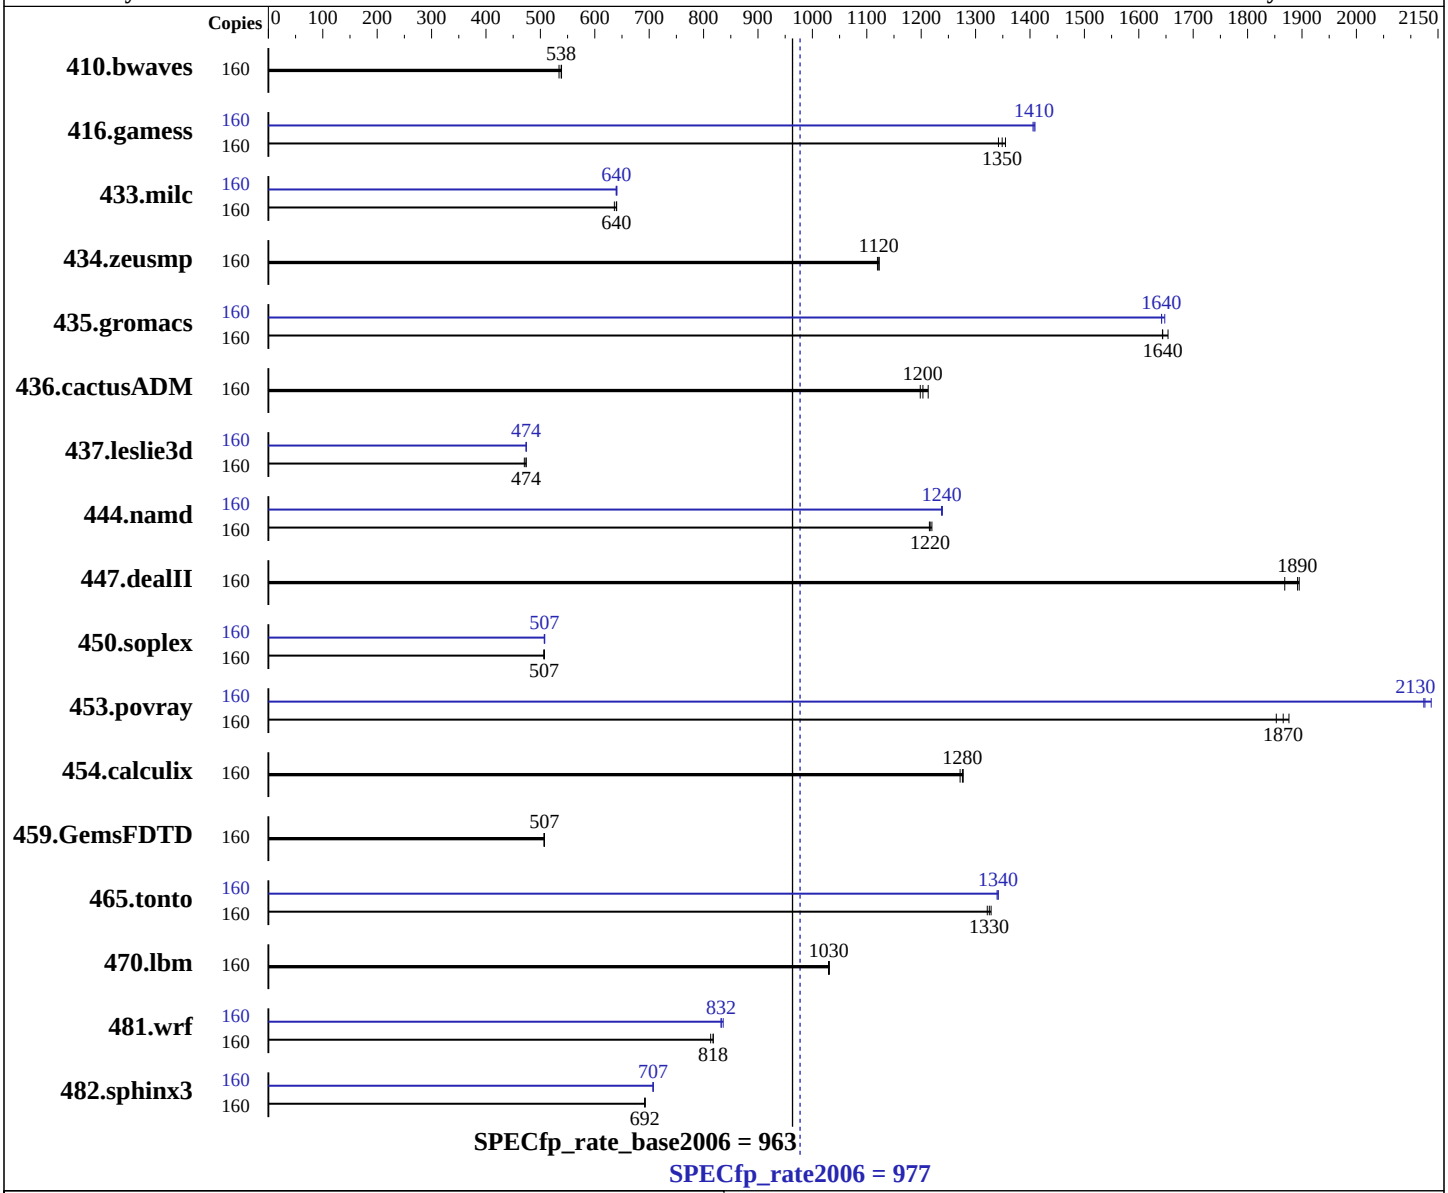

Hardware

CPU Name:	Intel Xeon E7-8850
CPU Characteristics:	Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	80 cores, 8 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	8 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 13.0.0.079 of Intel C++ Studio XE for Linux; Fortran: Version 13.0.0.079 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Tecal RH5885 V2 (8-sockets, Intel Xeon E7-8850)

SPECfp_rate2006 = 977

SPECfp_rate_base2006 = 963

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jan-2013
Hardware Availability: Oct-2012
Software Availability: Oct-2012

L3 Cache: 24 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (128 x 16 GB 4Rx4 PC3-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem: 1 x 600 GB SAS, 10K RPM, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	160	4035	539	**4040**	**538**	4070	534	160	4035	539	**4040**	**538**	4070	534
416.gamess	160	2312	1350	2334	1340	**2323**	**1350**	160	2229	1410	**2226**	**1410**	2223	1410
433.milc	160	**2296**	**640**	2309	636	2294	640	160	2292	641	2297	639	**2296**	**640**
434.zeusmp	160	1297	1120	1300	1120	**1298**	**1120**	160	1297	1120	1300	1120	**1298**	**1120**
435.gromacs	160	691	1650	**695**	**1640**	695	1640	160	693	1650	696	1640	**696**	**1640**
436.cactusADM	160	1576	1210	**1589**	**1200**	1596	1200	160	1576	1210	**1589**	**1200**	1596	1200
437.leslie3d	160	3174	474	**3175**	**474**	3197	470	160	3172	474	3175	474	**3173**	**474**
444.namd	160	**1055**	**1220**	1052	1220	1056	1220	160	1037	1240	1036	1240	**1037**	**1240**
447.dealII	160	980	1870	**968**	**1890**	966	1890	160	980	1870	**968**	**1890**	966	1890
450.soplex	160	**2633**	**507**	2635	506	2630	507	160	2626	508	2630	507	**2630**	**507**
453.povray	160	**456**	**1870**	454	1880	459	1850	160	**400**	**2130**	398	2140	401	2120
454.calculix	160	1033	1280	**1035**	**1280**	1038	1270	160	1033	1280	**1035**	**1280**	1038	1270
459.GemsFDTD	160	3350	507	3346	507	**3346**	**507**	160	3350	507	3346	507	**3346**	**507**
465.tonto	160	1191	1320	**1188**	**1330**	1185	1330	160	**1174**	**1340**	1173	1340	1175	1340
470.lbm	160	**2134**	**1030**	2132	1030	2135	1030	160	**2134**	**1030**	2132	1030	2135	1030
481.wrf	160	2186	818	2198	813	**2186**	**818**	160	**2147**	**832**	2147	832	2138	836
482.sphinx3	160	**4504**	**692**	4509	692	4502	693	160	4407	708	4410	707	**4410**	**707**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Power Technology set to Custom, Performance/Watt set to Traditional
Sysinfo program /home/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ 5569a0425e2ad530534e4c79a46e4d28
running on 8P-8850 Mon Jan  7 15:02:01 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7- 8850 @ 2.00GHz
      8 "physical id"s (chips)
      160 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 5 6 7 8 9
      physical 1: cores 0 1 2 3 4 5 6 7 8 9
      physical 2: cores 0 1 2 3 4 5 6 7 8 9
      physical 3: cores 0 1 2 3 4 5 6 7 8 9
      physical 4: cores 0 1 2 3 4 5 6 7 8 9
      physical 5: cores 0 1 2 3 4 5 6 7 8 9
      physical 6: cores 0 1 2 3 4 5 6 7 8 9
      physical 7: cores 0 1 2 3 4 5 6 7 8 9
   cache size : 24576 KB

From /proc/meminfo
   MemTotal:       2117852448 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux 8P-8850 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
   x86_64 x86_64 GNU/Linux

run-level 3 Jan 6 16:32

SPEC is set to: /home/cpu2006
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/vg_8p8850-lv_home
                  ext4    524G  150G  349G  31% /home
```

Continued on next page

Platform Notes (Continued)

```
 Additional information from dmidecode:
   BIOS American Megatrends Inc. RGPUC-BIOS-V051 01/05/2013
   Memory:
    128x   16 GB
    128x Samsung M393B2K70CM0-CH9 16 GB 1067 MHz 4 rank

 (End of data from sysinfo program)
    Descriptions about memory generated by sysinfo are not correct,
    only 128 DIMMs are installed not 256, see descriptions below.
    Memory:
     128x Samsung M393B2K70CM0-CH9 16 GB 1067 MHz 4 rank
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

 Binaries compiled on a system with 4x Xeon E7-8870 CPU + 1024GB
 memory using RHEL6.2
 Transparent Huge Pages disabled with:
 echo never  > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revF.20130129.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revF.20130129.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:47:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 January 2013.