



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 591

IBM Power 730 Express (4.2 GHz, 16 core)

SPECfp_rate_base2006 = 483

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2013

Hardware Availability: Feb-2013

Software Availability: Feb-2013

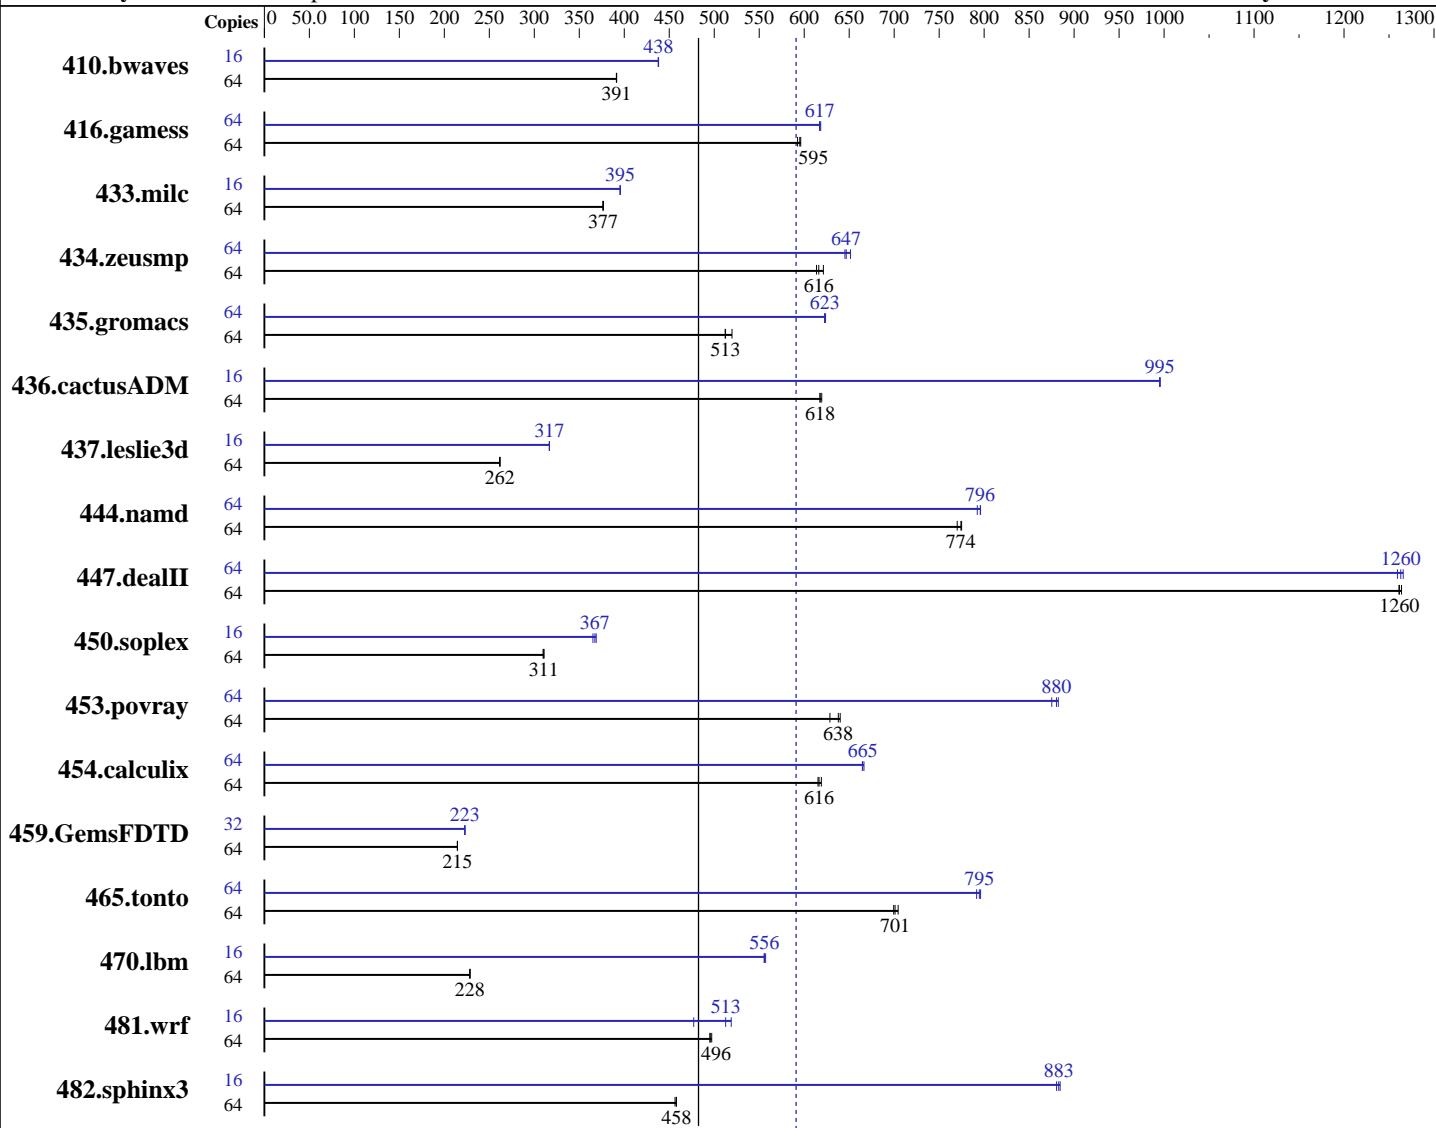

SPECfp_rate_base2006 = 483

SPECfp_rate2006 = 591

Hardware

CPU Name: POWER7+
CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.540 GHz
CPU MHz: 4228
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable: 8, 16 cores
Primary Cache: 32 KB I + 32 KB D on chip per core

Software

Operating System: IBM AIX V7.1
Compiler: C/C++: Version 12.1 of IBM XL C/C++ for AIX; Fortran: Version 14.1 of IBM XL Fortran for AIX
Auto Parallel: No
File System: AIX/JFS2
System State: Multi-user
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 591

IBM Power 730 Express (4.2 GHz, 16 core)

SPECfp_rate_base2006 = 483

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Feb-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per core
 Other Cache: None
 Memory: 128 GB (16 x 8 GB) DDR3 1066 MHz
 Disk Subsystem: 2 x 177 GB Raid0 SFF-1 SSD
 Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	2221	392	2223	391	<u>2222</u>	<u>391</u>	16	<u>496</u>	<u>438</u>	497	438	496	438
416.gamess	64	2106	595	2114	593	2102	596	64	2027	618	2031	617	2030	617
433.milc	64	1561	376	<u>1560</u>	<u>377</u>	1560	377	16	371	396	372	395	<u>371</u>	<u>395</u>
434.zeusmp	64	949	614	937	621	<u>945</u>	<u>616</u>	64	894	651	<u>901</u>	<u>647</u>	903	645
435.gromacs	64	879	520	<u>891</u>	<u>513</u>	892	512	64	734	623	<u>734</u>	<u>623</u>	733	624
436.cactusADM	64	1235	620	<u>1238</u>	<u>618</u>	1238	618	16	192	996	192	995	<u>192</u>	<u>995</u>
437.leslie3d	64	<u>2298</u>	<u>262</u>	2297	262	2301	261	16	<u>475</u>	<u>317</u>	475	317	475	317
444.namd	64	<u>663</u>	<u>774</u>	662	775	667	770	64	645	796	648	792	<u>645</u>	<u>796</u>
447.dealII	64	<u>580</u>	<u>1260</u>	581	1260	579	1260	64	578	1270	581	1260	<u>580</u>	<u>1260</u>
450.soplex	64	1723	310	<u>1719</u>	<u>311</u>	1718	311	16	<u>363</u>	<u>367</u>	362	369	365	365
453.povray	64	<u>534</u>	<u>638</u>	542	629	532	640	64	386	882	<u>387</u>	<u>880</u>	389	875
454.calculix	64	853	619	<u>856</u>	<u>616</u>	858	615	64	794	665	792	666	<u>794</u>	<u>665</u>
459.GemsFDTD	64	3165	215	<u>3165</u>	<u>215</u>	3164	215	32	1524	223	<u>1524</u>	<u>223</u>	1523	223
465.tonto	64	<u>898</u>	<u>701</u>	894	704	900	699	64	<u>792</u>	<u>795</u>	796	792	791	796
470.lbm	64	<u>3849</u>	<u>228</u>	3849	228	3850	228	16	395	557	<u>396</u>	<u>556</u>	396	555
481.wrf	64	<u>1443</u>	<u>496</u>	1444	495	1438	497	16	375	477	344	519	<u>349</u>	<u>513</u>
482.sphinx3	64	2733	456	2724	458	<u>2724</u>	<u>458</u>	16	354	880	353	884	<u>353</u>	<u>883</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler updated to November 2012 PTF

Version: 12.01.0000.0002

Fortran compiler updated to November 2012 PTF

Version: 14.01.0000.0002

Peak Tuning Notes

416.gamess fdpr options: -04 -cbpth -1 -sdp -1

433.milc fdpr options: -04 -nodp

435.gromacs fdpr options: -0

436.cactusADM fdpr options: -03 -lu -1 -nodp -sdp 9

437.leslie3d fdpr options: -03

450.soplex fdpr options: -04 -nodp

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 591

IBM Power 730 Express (4.2 GHz, 16 core)

SPECfp_rate_base2006 = 483

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Feb-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Peak Tuning Notes (Continued)

453.povray fdpr options: -O3 -cbpth -1
459.GemsFDTD fdpr options: -O3 -cbpth -1
465.tonto fdpr options: -O4
482.sphinx3 fdpr options: -O4 -rcctf 0 -sdp 9 -vrox

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

Operating System Notes

AIX updated to V7.1 TL 2 SP2

All ulimits set to unlimited.

6400 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLF RTEOPTS = "intrinthds=1"

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed

416.games: -qfixed

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 591

IBM Power 730 Express (4.2 GHz, 16 core)

SPECfp_rate_base2006 = 483

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Feb-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Base Portability Flags (Continued)

```
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE  
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-qipa=threads -bmaxdata:0x40000000 -qlargepage -O5 -D_ILS_MACROS  
-blpdata
```

C++ benchmarks:

```
-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -qsimd -qvecnvol  
-D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR  
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5  
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5 -D_ILS_MACROS  
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 591

IBM Power 730 Express (4.2 GHz, 16 core)

SPECfp_rate_base2006 = 483

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Feb-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -qipa=threads -bmaxdata:0x40000000 -O5 -qlargepage
-D__ILS_MACROS -qalign=natural -blpdata -btextpsize:64K

470.lbm: -qipa=threads -bmaxdata:0x30000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -D__ILS_MACROS -blpdata -btextpsize:64K

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D__ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

444.namd: -qipa=threads -O4 -q64 -qlargepage -D__ILS_MACROS
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
-btextpsize:64K

447.dealII: -qipa=threads -bmaxdata:0x50000000 -O5 -qsimd -qvecnvol
-D__ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 591

IBM Power 730 Express (4.2 GHz, 16 core)

SPECfp_rate_base2006 = 483

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Feb-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Peak Optimization Flags (Continued)

450.soplex: -qipa=threads -bmaxdata:0x40000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -D_ILS_MACROS
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
-btextpsize:64K

453.povray: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd
-qvecnvol -qlargepage -D_ILS_MACROS -qalign=natural
-blpdata -btextpsize:64K

Fortran benchmarks:

410.bwaves: -qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage
-qsmallstack=dynlenonheap -blpdata -btextpsize:64K

416.gamess: -qipa=threads -bmaxdata:0x40000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qarch=pwr5 -qlargepage -qalias=nostd
-blpdata -btextpsize:64K

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qxlf90=nosignedzero
-blpdata -btextpsize:64K

437.leslie3d: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -blpdata
-btextpsize:64K

459.GemsFDTD: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -q64 -qlargepage
-blpdata -btextpsize:64K

465.tonto: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnvol -blpdata
-btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5
-D_ILS_MACROS -blpdata -btextpsize:64K

436.cactusADM: -qipa=threads -bmaxdata:0x60000000 -O4 -qsimd -qvecnvol
-D_ILS_MACROS -qnostrict -blpdata -btextpsize:64K

454.calculix: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvol -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

481.wrf: -qipa=threads -bmaxdata:0x30000000 -O5 -qsimd -qvecnvol
-D_ILS_MACROS -blpdata -btextpsize:64K



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 591

IBM Power 730 Express (4.2 GHz, 16 core)

SPECfp_rate_base2006 = 483

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Feb-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Peak Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-036

450.soplex: -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

434.zeusmp: -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

Benchmarks using both Fortran and C (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

481.wrf: -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.html>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.xml>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:21:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 February 2013.