SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,
Intel Xeon E5-2667, 2.90 GHz)

SPECfp®_rate2006 = 424

SPECfp_rate_base2006 = 412

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2013
Hardware Availability: Mar-2012
Software Availability: Oct-2012

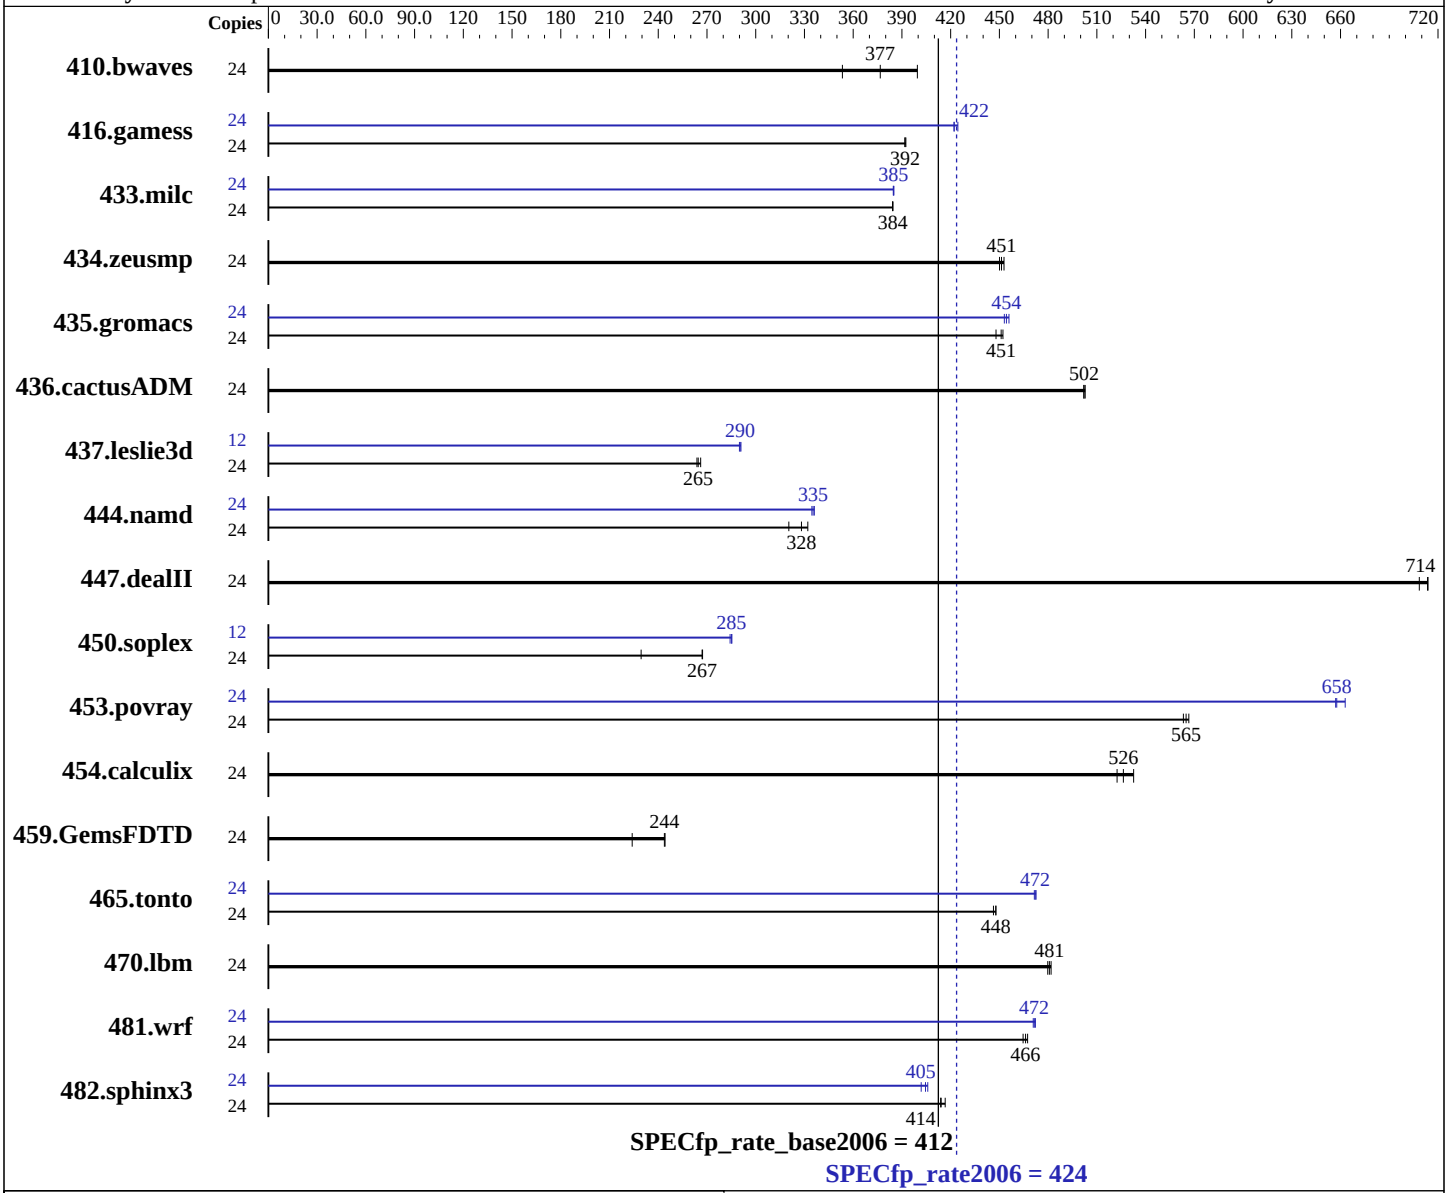

Hardware

CPU Name:	Intel Xeon E5-2667
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux; Fortran: Version 13.0.0.133 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,
Intel Xeon E5-2667, 2.90 GHz)

SPECfp_rate2006 = 424

SPECfp_rate_base2006 = 412

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2013
Hardware Availability: Mar-2012
Software Availability: Oct-2012

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	816	400	**866**	**377**	923	353	24	816	400	**866**	**377**	923	353
416.gamess	24	**1199**	**392**	1197	392	1199	392	24	1107	424	**1113**	**422**	1113	422
433.milc	24	573	384	**573**	**384**	573	384	24	**573**	**385**	572	385	573	385
434.zeusmp	24	485	450	**484**	**451**	482	453	24	485	450	**484**	**451**	482	453
435.gromacs	24	383	448	**380**	**451**	379	452	24	378	453	376	456	**377**	**454**
436.cactusADM	24	570	503	571	502	**571**	**502**	24	570	503	571	502	**571**	**502**
437.leslie3d	24	**853**	**265**	848	266	855	264	12	**388**	**290**	389	290	388	291
444.namd	24	580	332	601	320	**587**	**328**	24	575	335	**574**	**335**	573	336
447.dealII	24	385	714	388	708	**385**	**714**	24	385	714	388	708	**385**	**714**
450.soplex	24	**750**	**267**	872	229	749	267	12	**351**	**285**	351	285	352	284
453.povray	24	225	567	227	563	**226**	**565**	24	194	657	193	663	**194**	**658**
454.calculix	24	379	522	372	533	**376**	**526**	24	379	522	372	533	**376**	**526**
459.GemsFDTD	24	1137	224	1043	244	**1045**	**244**	24	1137	224	1043	244	**1045**	**244**
465.tonto	24	527	448	**527**	**448**	529	446	24	501	472	**500**	**472**	500	473
470.lbm	24	**686**	**481**	684	482	687	480	24	**686**	**481**	684	482	687	480
481.wrf	24	577	465	574	467	**575**	**466**	24	568	472	569	471	**569**	**472**
482.sphinx3	24	1130	414	**1129**	**414**	1123	417	24	**1156**	**405**	1164	402	1152	406

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
```

Continued on next page

General Notes (Continued)

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html
http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml
http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:13:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 July 2013.