



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

### SPECint®\_rate2006 = 1010

SGI Rackable H2106-G7 (AMD Opteron 6376, 2.30 GHz)

### SPECint\_rate\_base2006 = 899

CPU2006 license: 4


Test date: Sep-2013

Test sponsor: SGI

Hardware Availability: Mar-2013

Tested by: SGI

Software Availability: Feb-2013

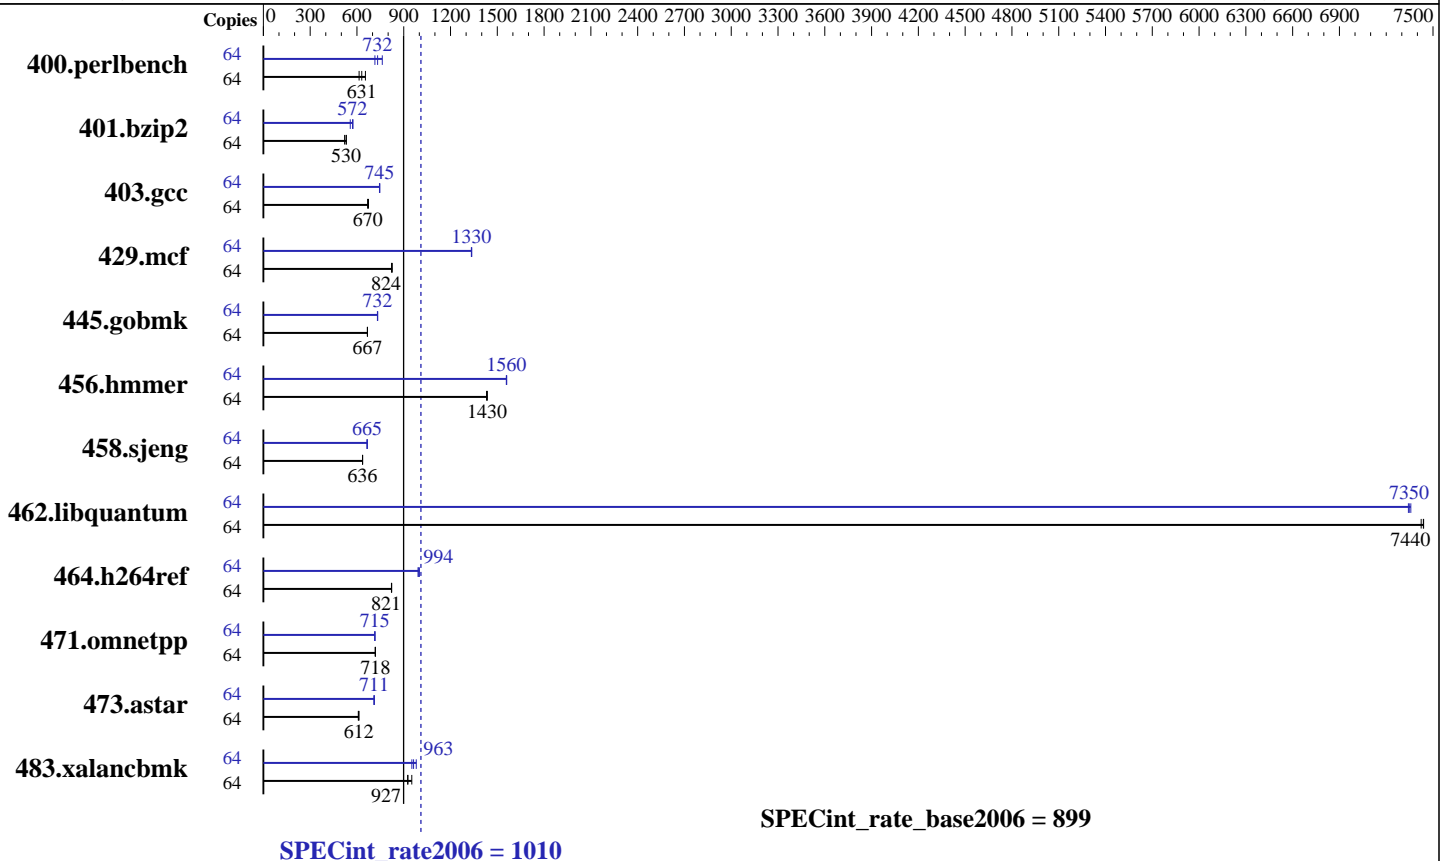

### Hardware

CPU Name: AMD Opteron 6376  
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 512 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 3000 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4,  
 (Santiago)  
 Kernel version 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite  
 (from AMD)  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SPECint\_rate2006 = 1010

SGI Rackable H2106-G7 (AMD Opteron 6376, 2.30 GHz)

SPECint\_rate\_base2006 = 899

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Sep-2013

Hardware Availability: Mar-2013

Software Availability: Feb-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	956	654	<u>991</u>	<u>631</u>	1019	614	64	<u>854</u>	<u>732</u>	874	715	820	762
401.bzip2	64	<u>1164</u>	<u>530</u>	1186	521	1161	532	64	1109	557	1075	575	<u>1080</u>	<u>572</u>
403.gcc	64	764	674	770	669	<u>768</u>	<u>670</u>	64	690	747	692	744	<u>692</u>	<u>745</u>
429.mcf	64	710	822	707	826	<u>709</u>	<u>824</u>	64	438	1330	437	1340	<u>437</u>	<u>1330</u>
445.gobmk	64	1006	667	1006	667	<u>1006</u>	<u>667</u>	64	<u>917</u>	<u>732</u>	918	731	916	733
456.hammer	64	<u>416</u>	<u>1430</u>	417	1430	416	1440	64	<u>383</u>	<u>1560</u>	383	1560	383	1560
458.sjeng	64	1218	636	1217	636	<u>1217</u>	<u>636</u>	64	<u>1164</u>	<u>665</u>	1163	666	1164	665
462.libquantum	64	<u>178</u>	<u>7440</u>	178	7440	179	7420	64	<u>180</u>	<u>7350</u>	181	7340	180	7360
464.h264ref	64	1724	821	<u>1724</u>	<u>821</u>	1721	823	64	1415	1000	1427	992	<u>1426</u>	<u>994</u>
471.omnetpp	64	558	717	557	719	<u>557</u>	<u>718</u>	64	<u>560</u>	<u>715</u>	559	715	560	715
473.astar	64	<u>735</u>	<u>612</u>	734	612	738	609	64	634	709	632	711	<u>632</u>	<u>711</u>
483.xalancbmk	64	464	952	<u>476</u>	<u>927</u>	477	925	64	<u>459</u>	<u>963</u>	464	952	450	980

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
Huge pages were not configured for this run.

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/data1/cpu2006-v1.2/amd1206-rate-libs-revA/32:/data1/cpu2006-v1.2/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**SGI**

**SPECint\_rate2006 = 1010**

SGI Rackable H2106-G7 (AMD Opteron 6376, 2.30 GHz)

**SPECint\_rate\_base2006 = 899**

**CPU2006 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Sep-2013

**Hardware Availability:** Mar-2013

**Software Availability:** Feb-2013

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000  
-IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2  
-march=bdver1

C++ benchmarks:  
-Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on -D\_\_OPEN64\_FAST\_SET  
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SPECint\_rate2006 = 1010

SGI Rackable H2106-G7 (AMD Opteron 6376, 2.30 GHz)

SPECint\_rate\_base2006 = 899

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Sep-2013

Hardware Availability: Mar-2013

Software Availability: Feb-2013

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
 -WOPT:sib=on -CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
 -CG:movext\_icmp=off -HP:bd=2m:heap=2m -march=bdver1  
 -GRA:aggr\_loop\_splitting=off -GRA:loop\_splitting=off

401.bzip2: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
 -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint  
 -OPT:goto=off -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m  
 -march=bdver2

403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:trip\_count=256 -CG:cmp\_peep=on -CG:pre\_minreg\_level=2  
 -m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
 -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll\_times\_max=5 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -CG:dsched=on -GRA:prioritize\_by\_density=on  
 -m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -OPT:unroll\_size=256 -OPT:unroll\_times\_max=8  
 -OPT:keep\_ext=on -IPA:plimit=750 -IPA:min\_hotness=300  
 -IPA:pu\_reorder=1 -LNO:ignore\_feedback=off -WOPT:if\_conv=2  
 -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:prefetch=2 -OPT:alias=disjoint  
 -OPT:unroll\_times\_max=16 -OPT:unroll\_size=512  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -CG:cflow=0  
 -CG:cmp\_peep=on -CG:pre\_local\_sched=off -HP:bd=2m:heap=2m  
 -CG:p2align=0 -CG:load\_exe=3 -CG:dsched=on -march=bdver1

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

**SPECint\_rate2006 = 1010**

SGI Rackable H2106-G7 (AMD Opteron 6376, 2.30 GHz)

**SPECint\_rate\_base2006 = 899**

**CPU2006 license:** 4

**Test date:** Sep-2013

**Test sponsor:** SGI

**Hardware Availability:** Mar-2013

**Tested by:** SGI

**Software Availability:** Feb-2013

## Peak Optimization Flags (Continued)

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-CG:ptr\_load\_use=0 -CG:divrem\_opt=on -CG:movext\_icmp=off  
-CG:locs\_best=on -LNO:full\_unroll=10 -IPA:pu\_reorder=2  
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll\_size=512 -OPT:unroll\_times\_max=16  
-LNO:prefetch=2 -LNO:prefetch\_ahead=4 -LNO:pf2=0  
-CG:local\_sched\_alg=1 -CG:p2align=0 -INLINE:aggressive=ON  
-IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:unroll\_size=256 -OPT:unroll\_times\_max=2  
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-WOPT:sib=on -D\_\_OPEN64\_FAST\_SET -march=bdver2 -mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m  
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on  
-TENV:frame\_pointer=off -fno-emit-exceptions -march=bdver2  
-mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

**SPECint\_rate2006 = 1010**

SGI Rackable H2106-G7 (AMD Opteron 6376, 2.30 GHz)

**SPECint\_rate\_base2006 = 899**

**CPU2006 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Sep-2013

**Hardware Availability:** Mar-2013

**Software Availability:** Feb-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 17:08:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 October 2013.