SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp®_rate2006 = 462

SPECfp_rate_base2006 = 454

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Nov-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

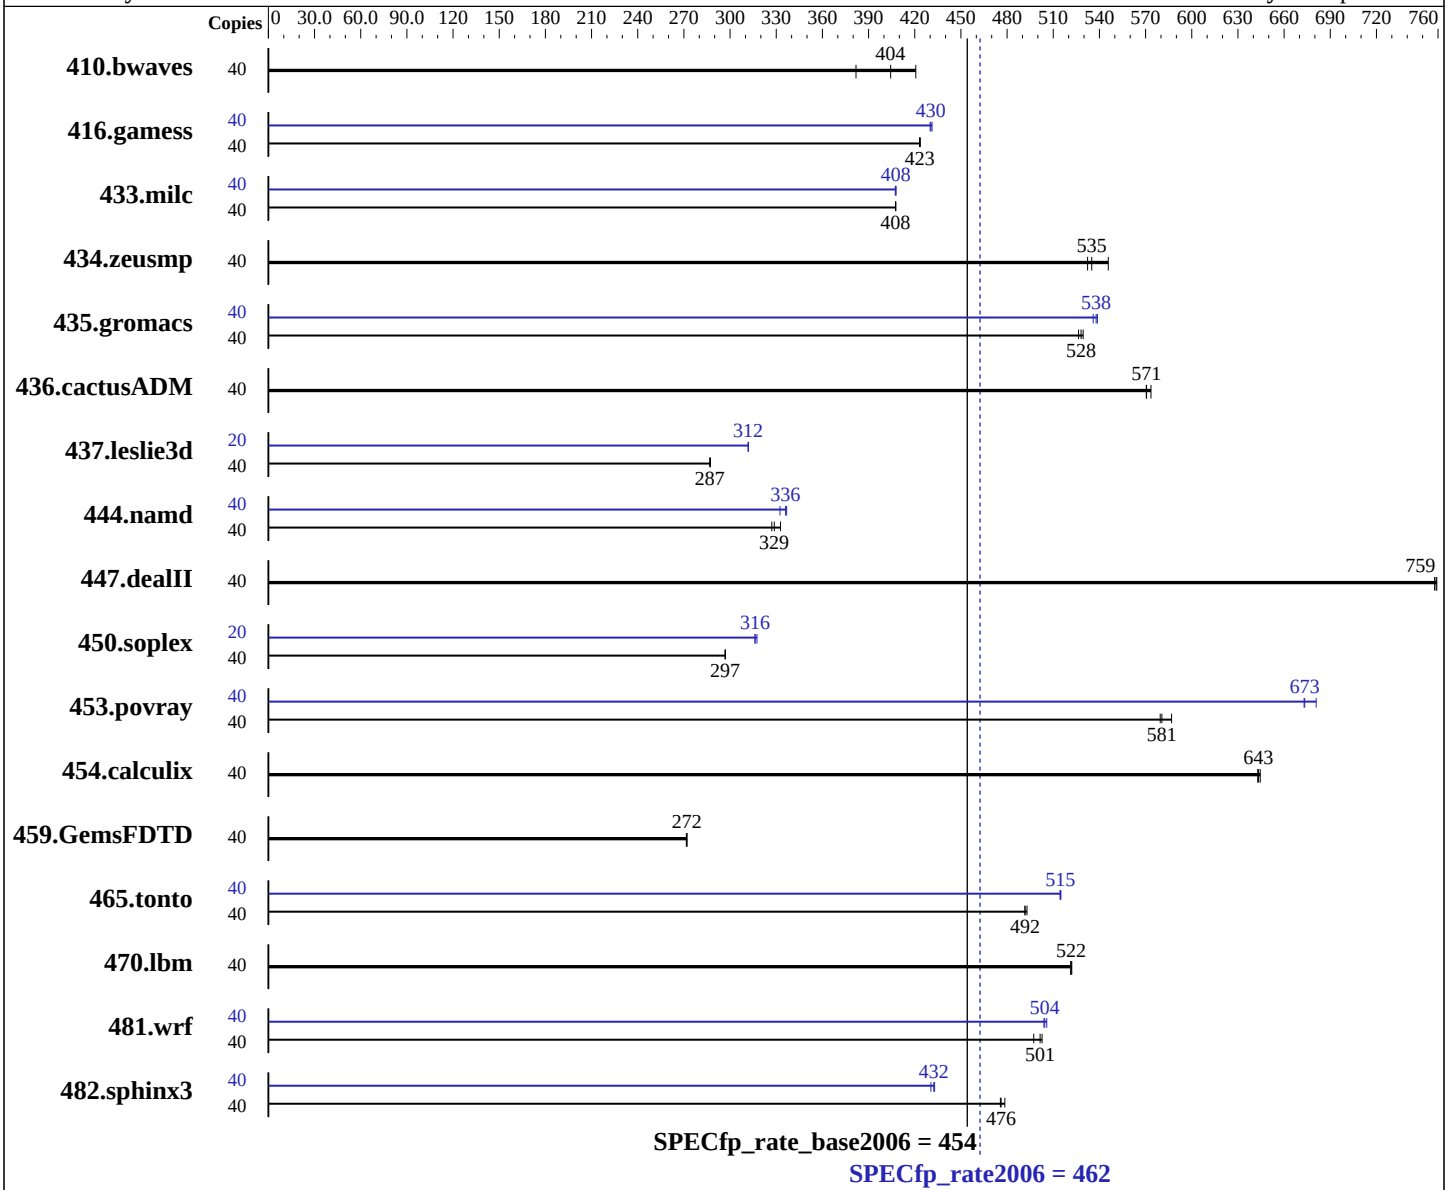

Hardware

CPU Name:	Intel Xeon E5-2650L v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.10 GHz
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.11.1.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate2006 = 462

SPECfp_rate_base2006 = 454

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Nov-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running with 1600 MHz and CL11)
Disk Subsystem: 2 TB SATA III, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1292	421	1424	382	**1344**	**404**	40	1292	421	1424	382	**1344**	**404**
416.gamess	40	1851	423	**1850**	**423**	1849	424	40	1816	431	1821	430	**1819**	**430**
433.milc	40	901	408	901	407	**901**	**408**	40	**901**	**408**	901	407	901	408
434.zeusmp	40	667	546	684	532	**680**	**535**	40	667	546	684	532	**680**	**535**
435.gromacs	40	542	526	539	529	**541**	**528**	40	530	539	533	536	**531**	**538**
436.cactusADM	40	**838**	**571**	833	573	838	570	40	**838**	**571**	833	573	838	570
437.leslie3d	40	1311	287	1309	287	**1310**	**287**	20	603	312	**603**	**312**	603	312
444.namd	40	**976**	**329**	981	327	964	333	40	953	337	965	332	**955**	**336**
447.dealII	40	603	759	**603**	**759**	604	758	40	603	759	**603**	**759**	604	758
450.soplex	40	**1124**	**297**	1124	297	1124	297	20	525	318	**527**	**316**	528	316
453.povray	40	367	580	363	587	**367**	**581**	40	316	673	**316**	**673**	313	681
454.calculix	40	512	644	513	643	**513**	**643**	40	512	644	513	643	**513**	**643**
459.GemsFDTD	40	1563	272	1560	272	**1561**	**272**	40	1563	272	1560	272	**1561**	**272**
465.tonto	40	**801**	**492**	798	493	801	492	40	**765**	**515**	764	515	765	514
470.lbm	40	1053	522	1054	521	**1054**	**522**	40	1053	522	1054	521	**1054**	**522**
481.wrf	40	898	497	**891**	**501**	889	503	40	883	506	**886**	**504**	887	504
482.sphinx3	40	**1637**	**476**	1639	476	1629	479	40	**1803**	**432**	1801	433	1811	431

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Fri Nov  8 07:56:40 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2650L v2 @ 1.70GHz
      2 "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
      physical 1: cores 0 1 2 3 4 8 9 10 11 12
   cache size : 25600 KB

From /proc/meminfo
   MemTotal:       132123136 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost.localdomain 2.6.32-358.11.1.el6.x86_64 #1 SMP Thu Nov 7
   11:30:53 CET 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 7 14:44

SPEC is set to: /cpu2006.1.2
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/sda1      ext4    1.7T   53G  1.6T   4% /

Additional information from dmidecode:
  BIOS American Megatrends Inc. 3.0  07/26/2013
  Memory:
   16x   8 GB
   14x Samsung M393B1G73BH0- 8 GB 1600 MHz 2 rank
   2x Samsung M393B1G73BH0-C 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

Continued on next page

Platform Notes (Continued)

```
 Correct memory configuration is: 16 x 8GB
 "dmidecode" didn't detect two modules properly so it reports two
 two variants of modules: "M393B1G73BH0-C" and "M393B1G73BH0-"
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 Binaries compiled on a system with 2x Xeon E5-2650 v2 chips
 + 256 GB memory using RedHat EL 6.4
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:50:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 December 2013.