



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>2006 = 68.5

PowerEdge R320 (Intel Xeon E5-1410 v2, 2.80 GHz)

SPECfp\_base2006 = 66.8

CPU2006 license: 55


Test date: Nov-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

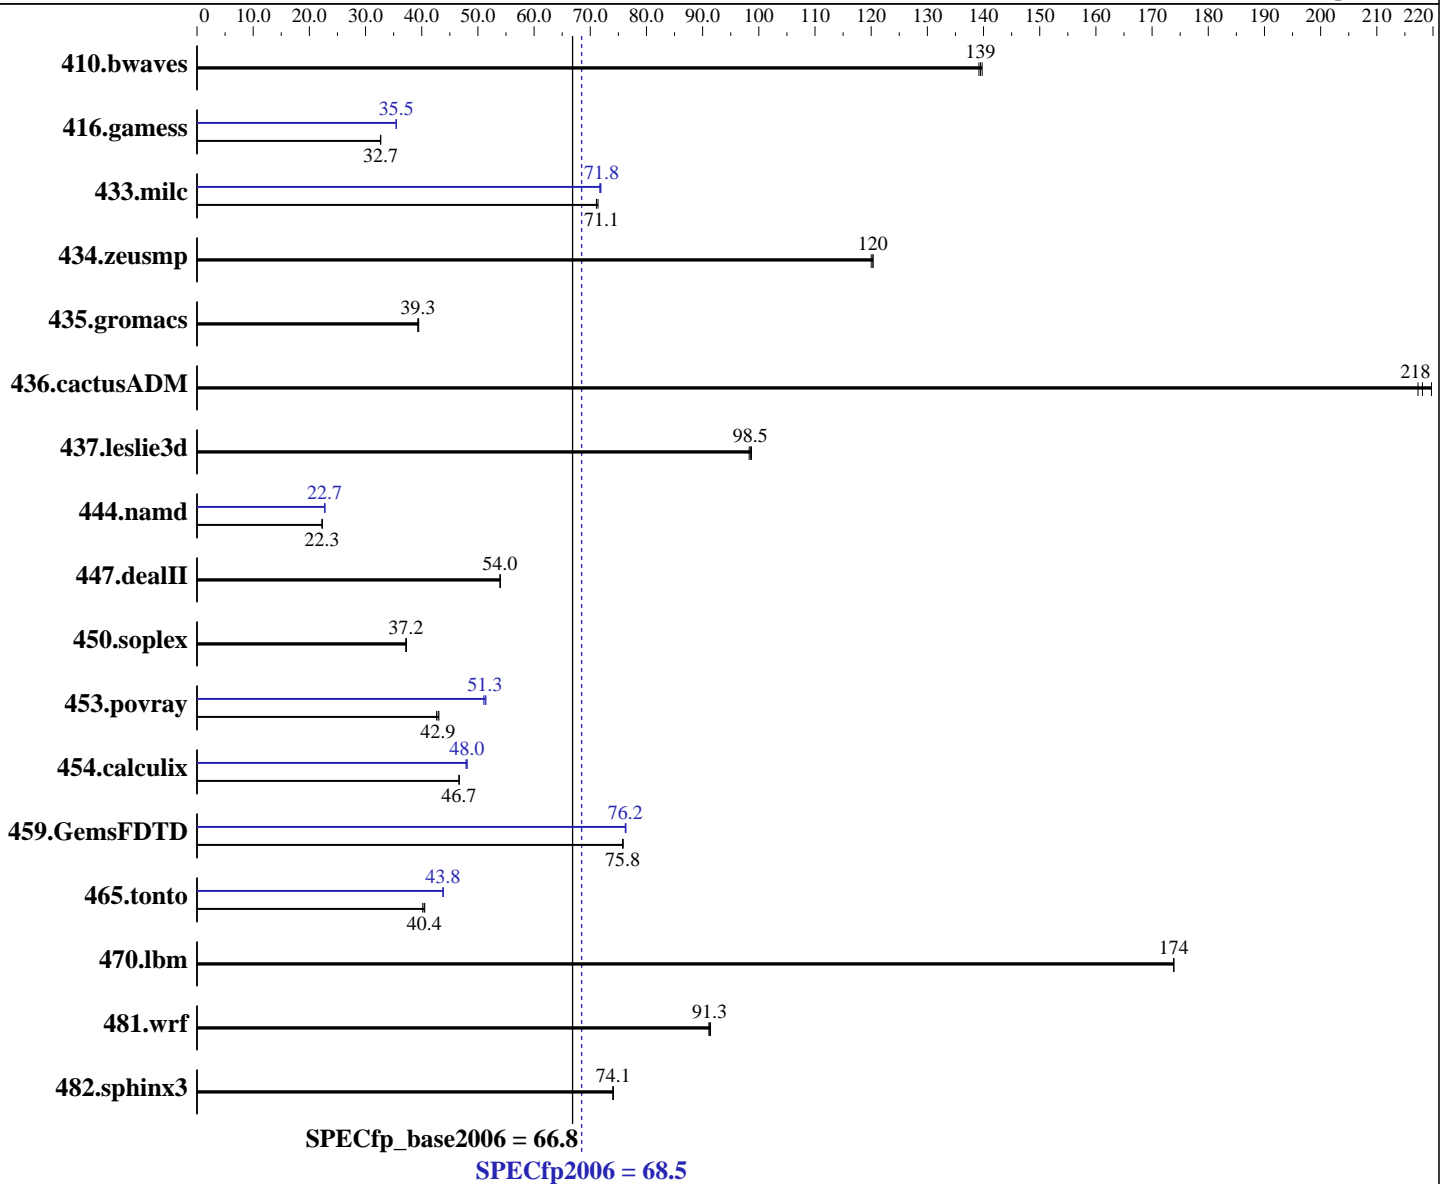

### Hardware

CPU Name: Intel Xeon E5-1410 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext2  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 68.5

PowerEdge R320 (Intel Xeon E5-1410 v2, 2.80 GHz)

SPECfp\_base2006 = 66.8

CPU2006 license: 55

Test date: Nov-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (6 x 16 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>97.4</u></b>	<b><u>139</u></b>	97.2	140	97.6	139	<b><u>97.4</u></b>	<b><u>139</u></b>	97.2	140	97.6	139
416.gamess	599	32.7	600	32.7	<b><u>599</u></b>	<b><u>32.7</u></b>	552	35.5	552	35.5	<b><u>552</u></b>	<b><u>35.5</u></b>
433.milc	129	71.4	129	71.1	<b><u>129</u></b>	<b><u>71.1</u></b>	<b><u>128</u></b>	<b><u>71.8</u></b>	128	71.7	128	71.9
434.zeusmp	75.8	120	75.6	120	<b><u>75.6</u></b>	<b><u>120</u></b>	75.8	120	75.6	120	<b><u>75.6</u></b>	<b><u>120</u></b>
435.gromacs	181	39.5	<b><u>182</u></b>	<b><u>39.3</u></b>	182	39.3	181	39.5	<b><u>182</u></b>	<b><u>39.3</u></b>	182	39.3
436.cactusADM	54.4	220	<b><u>54.8</u></b>	<b><u>218</u></b>	55.0	217	54.4	220	<b><u>54.8</u></b>	<b><u>218</u></b>	55.0	217
437.leslie3d	95.6	98.3	<b><u>95.4</u></b>	<b><u>98.5</u></b>	95.2	98.7	95.6	98.3	<b><u>95.4</u></b>	<b><u>98.5</u></b>	95.2	98.7
444.namd	360	22.3	360	22.3	<b><u>360</u></b>	<b><u>22.3</u></b>	353	22.7	<b><u>353</u></b>	<b><u>22.7</u></b>	353	22.7
447.dealII	212	54.0	<b><u>212</u></b>	<b><u>54.0</u></b>	212	53.9	212	54.0	<b><u>212</u></b>	<b><u>54.0</u></b>	212	53.9
450.soplex	224	37.3	224	37.2	<b><u>224</u></b>	<b><u>37.2</u></b>	224	37.3	224	37.2	<b><u>224</u></b>	<b><u>37.2</u></b>
453.povray	125	42.6	124	43.1	<b><u>124</u></b>	<b><u>42.9</u></b>	<b><u>104</u></b>	<b><u>51.3</u></b>	104	51.0	103	51.4
454.calculix	177	46.7	177	46.7	<b><u>177</u></b>	<b><u>46.7</u></b>	<b><u>172</u></b>	<b><u>48.0</u></b>	172	48.1	172	47.9
459.GemsFDTD	140	75.9	140	75.8	<b><u>140</u></b>	<b><u>75.8</u></b>	<b><u>139</u></b>	<b><u>76.2</u></b>	139	76.4	139	76.2
465.tonto	<b><u>243</u></b>	<b><u>40.4</u></b>	243	40.5	245	40.2	225	43.8	225	43.8	<b><u>225</u></b>	<b><u>43.8</u></b>
470.lbm	<b><u>79.0</u></b>	<b><u>174</u></b>	79.0	174	79.0	174	<b><u>79.0</u></b>	<b><u>174</u></b>	79.0	174	79.0	174
481.wrf	123	91.1	<b><u>122</u></b>	<b><u>91.3</u></b>	122	91.4	123	91.1	<b><u>122</u></b>	<b><u>91.3</u></b>	122	91.4
482.sphinx3	<b><u>263</u></b>	<b><u>74.1</u></b>	263	74.1	263	74.0	<b><u>263</u></b>	<b><u>74.1</u></b>	263	74.1	263	74.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
 Virtualization Technology disabled  
 Execute Disable disabled  
 Logical Processor disabled  
 System Profile set to Performance  
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on linux Mon Nov 4 15:42:35 2013

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 68.5

PowerEdge R320 (Intel Xeon E5-1410 v2, 2.80 GHz)

SPECfp\_base2006 = 66.8

CPU2006 license: 55

Test date: Nov-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-1410 v2 @ 2.80GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
cache size : 10240 KB

```

```

From /proc/meminfo
MemTotal:      99123704 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

```

```

uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Nov 4 09:38 last=S

```

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext2  267G  9.4G  257G   4% /

```

```

Additional information from dmidecode:
BIOS Dell Inc. 2.0.21 09/23/2013
Memory:
6x 00CE00B300CE M393B2G70BH0-YK0 16 GB 1333 MHz

```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp2006 = 68.5**

**PowerEdge R320 (Intel Xeon E5-1410 v2, 2.80 GHz)**

**SPECfp\_base2006 = 66.8**

**CPU2006 license:** 55

**Test date:** Nov-2013

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jan-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
OMP_NUM_THREADS = "4"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 68.5

PowerEdge R320 (Intel Xeon E5-1410 v2, 2.80 GHz)

SPECfp\_base2006 = 66.8

CPU2006 license: 55

Test date: Nov-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 68.5

PowerEdge R320 (Intel Xeon E5-1410 v2, 2.80 GHz)

SPECfp\_base2006 = 66.8

CPU2006 license: 55

Test date: Nov-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 68.5

PowerEdge R320 (Intel Xeon E5-1410 v2, 2.80 GHz)

SPECfp\_base2006 = 66.8

CPU2006 license: 55

Test date: Nov-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 21:20:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 January 2014.